



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



ETH Electro Cylinder

Parker High Force Electro Thrust Cylinder

Catalog No. 201510AKD



ENGINEERING YOUR SUCCESS.



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Overview	5
Technical Characteristics.....	8
Step by Step Selection Process	10
Calculating Required Axial Force.....	11
Selection of the Size and Screw Lead.....	12
ETH - Electro Thrust Cylinder for ATEX Environment	12
Lifetime	13
Permissible Axial Thrust Forces.....	15
Permissible Side Load	17
Stroke, Usable Stroke and Safety Travel.....	19
Relubrication	20
Dimensions	21
Motor Mounting Options	22
Motor and Gearbox Selection	25
Mounting Methods	26
Standard	26
Center Trunnion Mounting.....	26
Rear Eye Mounting.....	27
Rear Clevis	27
Rear Plate	29
Front Plate.....	29
Front and Rear Plate.....	29
Foot Mounting	30
Mounting Flanges	31
Cylinder Rod Version	32
External thread	32
Internal Thread	32
Rod Clevis.....	32
Spherical Rod Eye	33
Alignment Coupler.....	33
Outrigger Bearing	34
Accessories.....	38
Force sensors - Joint head with integrated force sensor with optional joint head.....	38
Force sensors - Rear clevis with force sensor	40
Initiators / Limit Switches.....	42
Drive Train Selection	43
Example for Sizing with Predefined Drive Trains	43
Predefined Motion Packages ETH032	44
Predefined Motion Packages ETH050	46
Predefined Motion Packages ETH080	48
Predefined Motion Packages ETH100, ETH125	50
Predefined Motion Packages ETH032, ETH050, ETH080 (P-Series).....	52
Order Code.....	54

Parker Hannifin

The global leader in motion and control technologies

A world class player on the local stage

Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

Local Manufacturing and Support

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout North American and around the globe. For contact information, please refer to the sales offices on the back cover of this document or visit www.parker.com

Rohnert Park, CA - Electronics Business Unit and Headquarters for Electromechanical NA.



Irwin, PA - Mechanics Business Unit and manufacturing.



Parker Electromechanical's Worldwide Manufacturing Locations

North America

- Rohnert Park, CA
- Irwin, PA
- New Ulm, MN
- Wadsworth, OH
- Charlotte, NC

Europe

- Littlehampton, UK
- Dijon, France
- Offenburg, Germany
- Filderstadt, Germany
- Milan, Italy

Asia

- Wuxi, China
- Hwaseong-si, Korea
- Chennai, India

New Ulm, MN - Motor and Gearhead Business Unit and manufacturing.



Chennai, India



Hwaseong, Korea



Wuxi, China



High Force Electro Thrust Cylinder - ETH

Overview

Description

The ETH electro cylinder closes the gap between pneumatic and hydraulic actuators; it is suitable to replace those in many applications and simultaneously increase the reliability of the production process. Taking the costs for air and oil into consideration, you will find that in most cases an electromechanical system such as the ETH electro cylinder offers the more economical solution. Combined with a wide choice of accessories, it offers many possibilities in a wide variety of fields.

Typical areas of application

- **Material handling and feed systems**
 - wood and plastic working industry
 - vertical actuators for loading machine tools
 - in the textile industry for tensioning / gripping textile fabrics
 - in the automotive industry for transporting and feeding components
- **Testing equipment and laboratory applications**
- **Valve and flap actuation**
- **Pressing**
- **Packaging machinery**
- **Process automation in the food and beverage industry**

Features

- **Unrivalled power density - high forces and small frame sizes**
- **Cabling can be concealed in the profile**
- **Accessories with integrated force sensors help to allot and even to control forces precisely**
- **Optimized for safe handling and simple cleaning**
- **High service life**
- **Reduced maintenance costs thanks to lubricating access in the cylinder flange**
- **Easy replacement due to pneumatic ISO flange norm (DIN ISO 15552:2005-12) conformity**
- **Integrated anti-rotation device**
- **Reduced noise emission**
- **All from one source**
We offer the complete drive train: Drive controllers, motors and gearboxes to match the Electro Cylinder



Technical Characteristics - Overview

Type	ETH Electro Cylinder
Frame sizes	ETH032 / ETH050 / ETH080 / ETH100 / ETH125
Screw lead	5, 10, 16, 20, 32 mm
Stroke	up to 2000 mm
Traction/thrust force	up to 114 000 N
Speed	up to 1.7 m/s
Acceleration	up to 15 m/s ²
Equivalent dynamic axial force at a lifetime of 2500 km	up to 49 600 N
Efficiency	up to 90 %
Repeatability	up to ± 0.03 mm
Protection classes	IP54 IP54 with stainless screws IP65
Drive	Inline: Axial drive or parallel drive with high performance toothed belt
Directives	2011/65/EC: Conform to RoHS  94/9/EC: ATEX  Equipment group II Category 2 Please contact Parker for details
Classification	II 2G Ex c IIC T4 EPS 13 ATEX 2 592 X (ETH032 / ETH050) II 2G Ex c IIB T4 EPS 13 ATEX 2 592 X (ETH080 / ETH100)

We also offer customized solutions:

If your application requires a special version of the ETH cylinder, please contact your local Parker Sales Office.

- Oil splash lubrication
- Customized mountings and rod ends
- Mounting of customer motors
- Preparation of the cylinder for use under aggressive environmental conditions
- Overlong thrust rod
- Polished thrust rod
- Thrust rod hard-chrome plated

Parker High Force Electro Thrust Cylinder


Parallel Type



Inline Type



Product Design

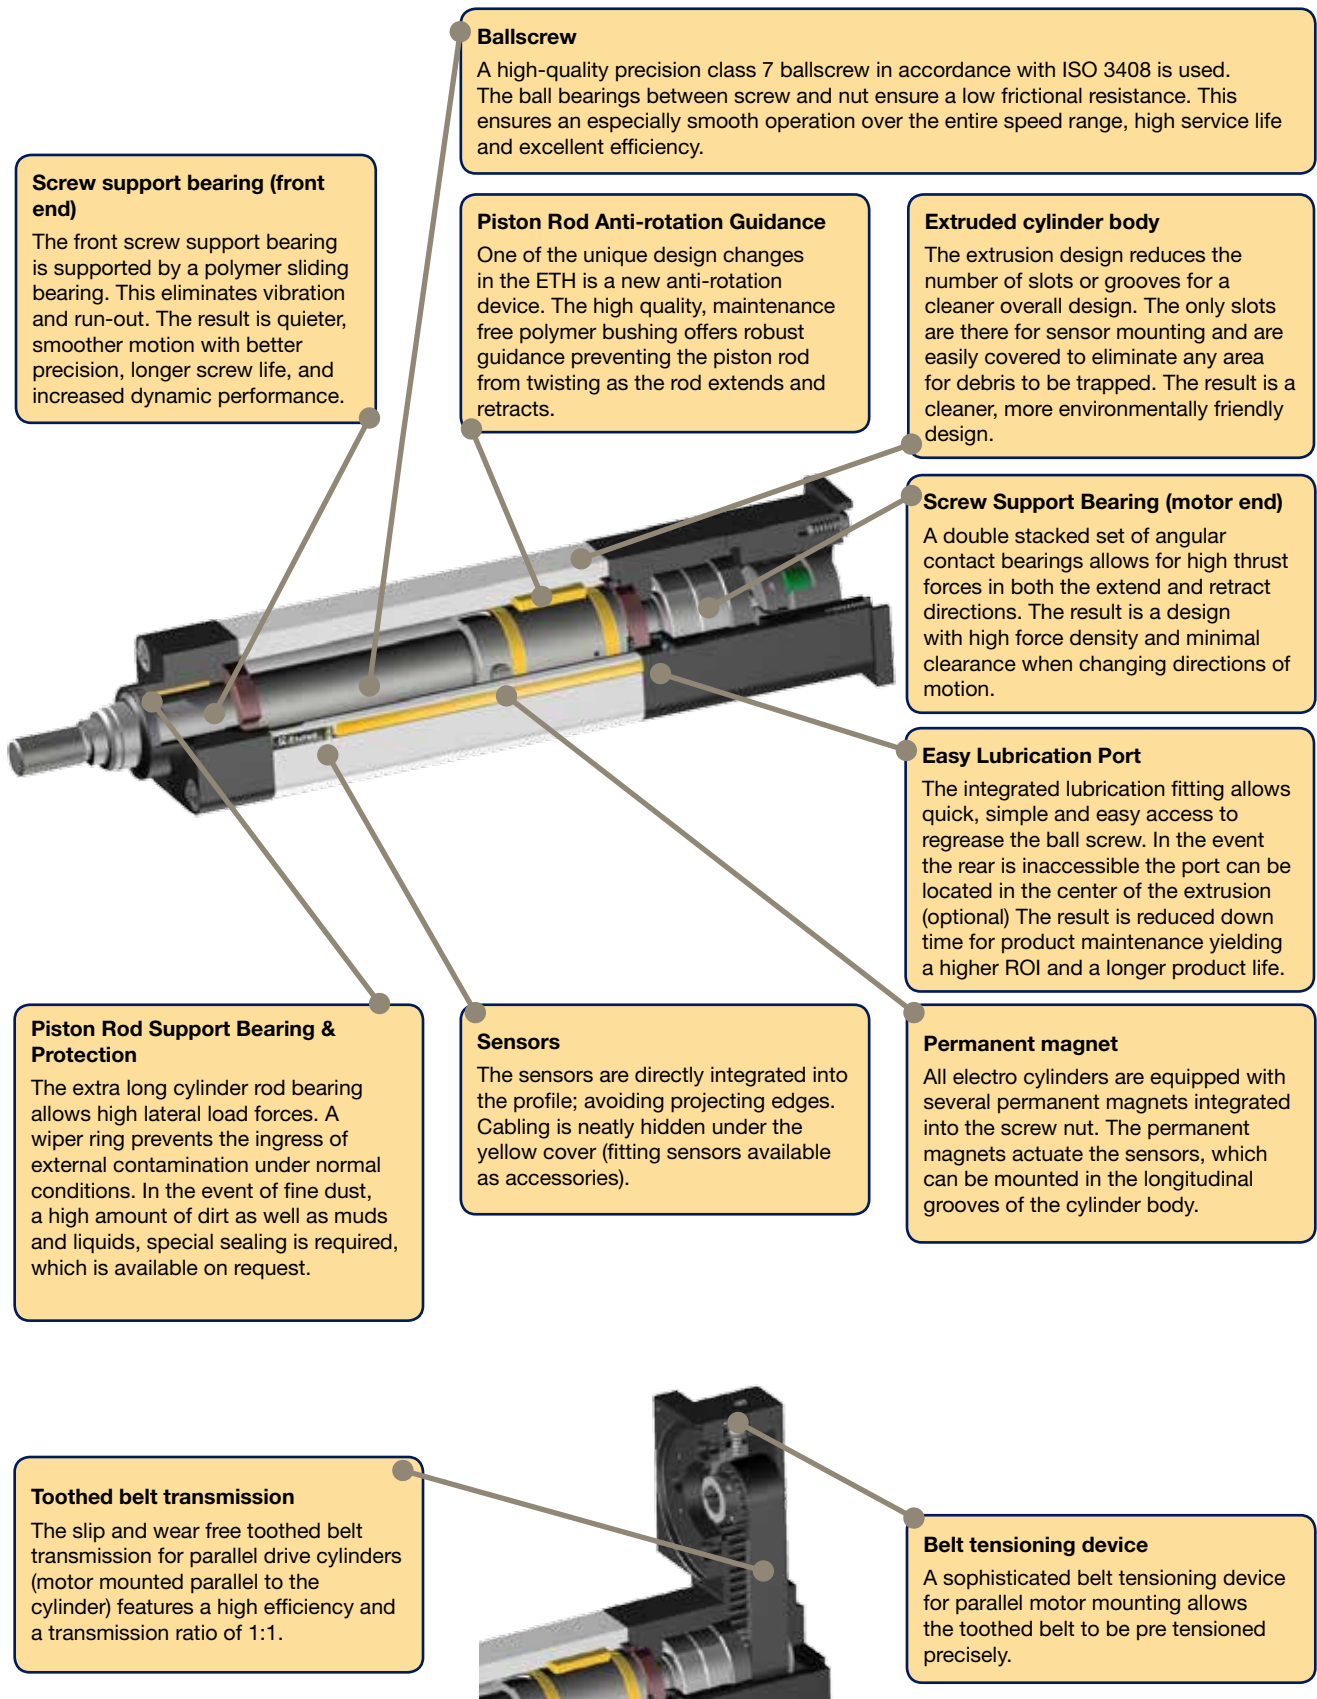

Technical Characteristics

Contact customer service team for bore size 100mm and 125mm

Cylinder size type	Unit	ETH032			ETH050			ETH080		
		M05	M10	M16 ⁴⁾	M05	M10	M20 ³⁾	M05	M10	M32 ⁴⁾
Screw lead	[mm]	5	10	16	5	10	20	5	10	32
Screw diameter	[mm]	16			20			32		

Travels, speeds and accelerations

Available strokes ^{1) 2)}	[mm]	continuous from 50-1000 & standard strokes			continuous from 50-1200 & standard strokes			continuous from 50-1600 & standard strokes		
Max. permissible speed at stroke =										
50-400 mm	[mm/s]	333	667	1067	333	667	1333	267	533	1707
600 mm	[mm/s]	286	540	855	333	666	1318	267	533	1707
800 mm	[mm/s]	196	373	592	238	462	917	267	533	1707
1000 mm	[mm/s]	146	277	440	177	345	684	264	501	1561
1200 mm	[mm/s]	-	-	-	139	270	536	207	394	1233
1400 mm	[mm/s]	-	-	-	-	-	-	168	320	1006
1600 mm	[mm/s]	-	-	-	-	-	-	140	267	841
Max. Acceleration	[m/s ²]	4	8	12	4	8	15	4	8	15

Forces

Max. axial traction/thrust force motor inline	[N]		3700	2400	9300	7000	4400	17800	25100	10600
Max. axial traction/thrust force depending on the motor speed n	n < 100 min ⁻¹	[N]	3280	2050		4920	2460			
Motor parallel	100 < n < 300 min ⁻¹	[N]	2620	1640	7870	3930	1960		11620	3630
	n > 300 min ⁻¹	[N]	1820	1140	5480	2740	1370		10720	3350
Equivalent dynamic axial force at a lifetime of 2500 km	[N]	1130	1700	1610	2910	3250	2740	3140	7500	6050

Max. transmissible torque / force constant

Max. transmissible torque inline motor	[Nm]	3.2	6.5	6.8	8.2	12.4	15.6	15.7	44.4	60.0
Max. transmissible torque depending on the motor speed n	n < 100 min ⁻¹	[Nm]	3.5	6.4	9.1	9.3		17.5	22.8	
Motor parallel	100 < n < 300 min ⁻¹	[Nm]	3.5	5.2	7.7	7.7		17.5	22.8	
	n > 300 min ⁻¹	[Nm]	3.5	3.6	5.4	5.4		17.5	21.1	
Force constant motor inline ⁵⁾	[N/Nm]	1131	565	353	1131	565	283	1131	565	177
Force constant motor parallel ⁵⁾	[N/Nm]	1018	509	318	1018	509	254	1018	509	159

Mass

Mass of base unit with zero stroke (incl. Cylinder rod)	[kg]	1.2	1.2	1.3	2.2	2.3	2.5	6.9	7.6	8.7
Mass of additional stroke (incl. Cylinder rod)	[kg/m]	4.8			8.6			18.7		
Weight of cylinder rod with zero stroke	[kg]	0.06			0.15			0.59		
Weight of cylinder rod - additional length	[kg/m]	0.99			1.85			4.93		

Mass moments of inertia

Motor parallel without stroke	[kgmm ²]	8.3	8.8	14.1	30.3	30.6	38.0	215.2	213.6	301.9
Motor inline without stroke	[kgmm ²]	7.1	7.6	12.9	25.3	25.7	33.1	166.2	164.5	252.9
Parallel/inline motor per meter	[kgmm ² /m]	41.3	37.6	41.5	97.7	92.4	106.4	527.7	470.0	585.4

Accuracy: Bidirectional Repeatability (ISO230-2)

Motor inline	[mm]	±0.03								
Motor parallel	[mm]	±0.05								

Efficiency

Motor inline	the efficiency includes all friction torques	[%]	90							
Motor parallel		[%]	81							

Ambient conditions

Operating Temperature	[°C]	-10...+70								
Ambient temperature	[°C]	-10...+40								
Storage temperature	[°C]	-20...+40								
Humidity	[%]	0...95 % (non-condensing)								
Location height range	[m]	max. 3000								

¹⁾ "Order Code" (page 54), ²⁾ Intermediate stroke lengths may be interpolated.

³⁾ ATEX on request

⁴⁾ ATEX not available, ⁵⁾ The efficiency factors are included in the force constants.

Cylinder size type	Unit	ETH100		ETH125 ³⁾	
		M10	M20	M10	M20
Screw lead	[mm]	10	20	10	20
Screw diameter	[mm]	50		63	

Travels, speeds and accelerations

Available strokes ^{1) 2)}	[mm]	continuous from 100-2000 & standard strokes		continuous from 100-2000 & standard strokes	
Max. permissible speed at stroke =					
100-400 mm	[mm/s]	400	800	417	833
500 mm	[mm/s]	400	747	417	807
600 mm	[mm/s]	333	622	395	684
800 mm	[mm/s]	241	457	290	514
1000 mm	[mm/s]	185	354	224	405
1200 mm	[mm/s]	148	284	180	329
1400 mm	[mm/s]	122	235	148	275
1600 mm	[mm/s]	102	198	125	234
2000 mm	[mm/s]	76	148	94	170
Max. Acceleration	[m/s ²]	8	10	8	10

Forces

Max. axial traction/thrust force motor inline	[N]	54 800	56 000	88 700	114 000
Max. axial traction/thrust force depending on the motor speed n Motor parallel	n < 100 min ⁻¹		50 800	76 300	81 400
	100 < n < 300 min ⁻¹		43 200		73 700
	n > 300 min ⁻¹		35 600		61 000
Equivalent dynamic axial force at a lifetime of 2500 km	[N]	18 410	27 100	27 140	49 600

Max. transmissible torque / force constant

Max. transmissible torque inline motor	[Nm]	100	200	150	400
Max. transmissible torque depending on the motor speed n Motor parallel	n < 100 min ⁻¹	108	200		320
	100 < n < 300 min ⁻¹		170		290
	n > 300 min ⁻¹		140		240
Force constant motor inline ⁵⁾	[N/Nm]	565	283	565	283
Force constant motor parallel ⁵⁾	[N/Nm]	509	254	509	254

Weight

Mass of base unit with zero stroke (incl. Cylinder rod)	[kg]	21	23	56	64
Mass of additional stroke (incl. Cylinder rod)	[kg/m]	39		62	
Weight of cylinder rod with zero stroke	[kg]	1.2		2.9	
Weight of cylinder rod - additional length	[kg/m]	7.8		14.4	

Mass moments of inertia

Motor parallel without stroke	[kgmm ²]	5860	6240	17 050	17 990
Motor inline without stroke	[kgmm ²]	2240	2620	12 960	13 400
Parallel/inline motor per meter	[kgmm ² /m]	4270	4710	10 070	10 490

Accuracy: Bidirectional Repeatability (ISO230-2)

Motor inline	[mm]	±0.03			
Motor parallel	[mm]	±0.05			

Efficiency

Motor inline	the efficiency includes all friction torques	[%]	90		
Motor parallel		[%]	81		

Ambient conditions

Operating Temperature	[°C]	-10...+70			
Ambient temperature	[°C]	-10...+40			
Storage temperature	[°C]	-20...+40			
Humidity	[%]	0...95 % (non-condensing)			
Location height range	[m]	max. 3000			

¹⁾ "Order Code" (page 54), ²⁾ Intermediate stroke lengths may be interpolated.


³⁾ ATEX on request, ⁵⁾ The efficiency factors are included in the force constants.

Technical Data apply under normal conditions and only for the individual operating and load modes. In the case of compound loads, it is necessary to verify in accordance with normal physical laws and technical standards whether individual ratings should be reduced. In case of doubt please contact Parker.

Step by Step Selection Process

The following sizing steps help you to find the suitable electro cylinder. Select an electro cylinder using estimated application data. Calculate the actually required application data following the dimensioning steps described below.

If your application's requirements exceed a maximum value, please choose a larger electro cylinder and recheck the maximum values. Perhaps, a smaller electro cylinder can also meet the requirements.

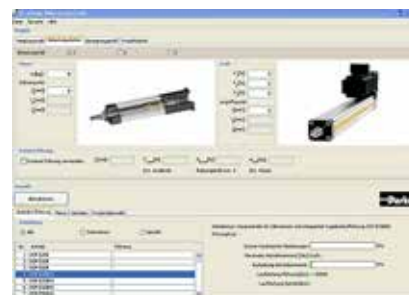

Automated dimensioning with the help of the "EL Sizing Tool"


A dimensioning tool simplifies the dimensioning process. Download under:
www.parker.com/eme/eth

Step	Application data	Selection	With the aid of ...
1	Accuracy, ambient conditions	Check the basic conditions for the use of the ETH in your application.	"Technical Characteristics" (page 8)
2	Required space	Check the space available in your application and choose the motor mounting option: inline or parallel.	"Dimensions" (page 21)
3	Axial forces	Calculation of the axial forces in the individual segments of the application cycle.	"Calculating Required Axial Force" (page 11)
4	Maximum force required	Determination of the maximum required axial force (traction and thrust force)	Determination of the maximum required axial force (page 12)
		Selection of the cylinder via the maximum axial traction/thrust force (please use the characteristics of your desired motor mounting option: inline or parallel).	"Technical Characteristics" (page 8)
5	Maximum speed	Selection of the screw lead for the desired cylinder.	"Technical Characteristics" (page 8)
6	Maximum Acceleration	Please check if the maximum acceleration is sufficient.	"Technical Characteristics" (page 8)
7	Select stroke	Selection of the desired stroke: Determine required stroke from usable stroke and safety travels select the desired stroke from the list of standard strokes or, if the desired stroke is not listed: Define the length of the usable stroke in steps of one mm. Caution! Please respect the minimum and the maximum possible stroke	"Stroke, Usable Stroke and Safety Travel" (page 19)
			"Order Code" (page 54) "Technical Characteristics" (page 8)
8	Permissible thrust force taking the buckling risk into consideration	Check the maximum thrust force depending on the stroke and the mounting variant. Maybe your application can also be realized with a different mounting variant allowing to attain the maximum thrust force.	"Permissible Side Load" (page 17)
9	Service life	Determining the service life with the aid of an equivalent axial force, the operational environment (application factor) and the service life diagrams.	"Lifetime" (page 13)
10	Permissible side load	Determine the lateral forces of your application and compare them to the permissible lateral forces (depending on the stroke).	Side load (page 17) Diagrams (page 17)
11	Relubricating cycle	Please check, if the required relubricating cycle is suitable for your production environment.	"Relubrication" (page 20)
12	Motor / gearbox	Calculation of the necessary torque to generate the required force at the ETH. Selection of a suitable motor.	"Motor and Gearbox Selection" (page 25)
13	Motor mounting flange	Selection of a suitable motor mounting flange.	"Motor Mounting Options" (page <OV>)
14	Mounting type	Selection of the electro cylinder mounting method.	"Mounting Methods" (page 26)
15	Cylinder rods	Selection of the cylinder rod end for load mounting.	"Cylinder Rod Version" (page 32)

Calculating Required Axial Force

Formulas 1 & 2 below give the mathematical equation for calculating the thrust required to extend or retract the piston rod.

With the aid of the axial forces, it is possible to check if the electro cylinder is able to provide the required forces and if the maximum buckling load is respected. The axial forces are also used as the calculation basis for the service life.

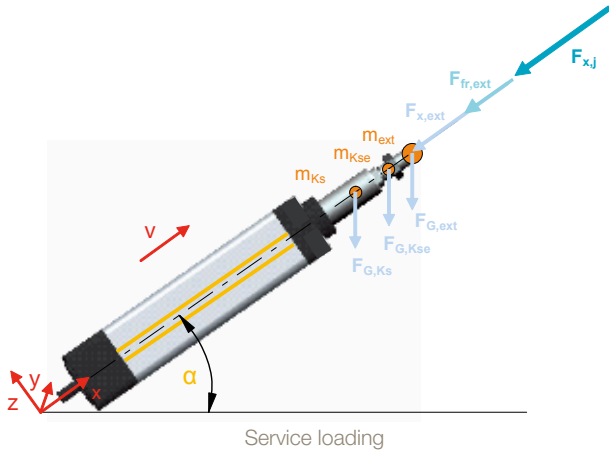

Formula symbols (Formula 1-2)

$F_{x,a,j}$	= Axial forces during extension in N
$F_{x,e,j}$	= Axial forces during retraction in N
$F_{x,ext}$	= External axial force in N
$F_{G,ext}$	= Weight force caused by an additional mass in N
$F_{G,Kse}$	= Weight force caused by the cylinder rod end in N
$F_{G,Ks}$	= Weight force caused by the cylinder rod in N
m_{ext}	= Additional mass in kg
m_{Kse}	= Mass of the cylinder rod end in kg (see "Cylinder Rod Version" page 32)
$m_{Ks,0}$	= Mass of the cylinder rod at zero stroke in kg (see table "Technical Data" page 8)
$m_{Ks,stroke}$	= Mass of the cylinder rod per mm of stroke in kg (see table "Technical Data" page 8)
Stroke	= Selected stroke in m
$a_{K,j}$	= Acceleration at the cylinder rod in m/s ²
α	= Alignment angle in °
$F_{x,max}$	= Maximum permissible axial force in N
$F_{fr,ext}$	= External friction force in N

Index "j" for the individual segments of the application cycle

Calculation of axial forces

Determine the axial forces occurring during each individual segment of the application cycle.

Cylinder rod extending:

$$F_{x,a,j} = F_{x,ext} + F_{fr,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,Stroke} \cdot \text{Stroke}) \cdot (a_{K,j} + \sin \alpha \cdot 9.81 \frac{m}{s^2})$$

Formula 1

Cylinder rod retracting:



$$F_{x,e,j} = F_{x,ext} - F_{fr,ext} + (m_{ext} + m_{Kse} + m_{Ks,0} + m_{Ks,Stroke} \cdot \text{Stroke}) \cdot (-a_{K,j} + \sin \alpha \cdot 9.81 \frac{m}{s^2})$$

Formula 2

Sample calculation:

Vertical mounting

- ETH050
- Stroke = 500 mm = 0.5 m
- Pitch = 5 mm
- Rod End: External thread
- Trapezoidal velocity course
- Acceleration $a_K = 4 \text{ m/s}^2$
- $m_{ext} = 150 \text{ kg}$
- $F_{x,ext} = 1000 \text{ N}$
- $m_{Kse} = 0.15 \text{ kg}$
- $m_{Ks,0} = 0.15 \text{ kg}$
- $m_{Ks,Stroke} = 1.85 \text{ kg/m}$
- Alignment angle $\alpha = -90^\circ$
- External friction force = 30 N

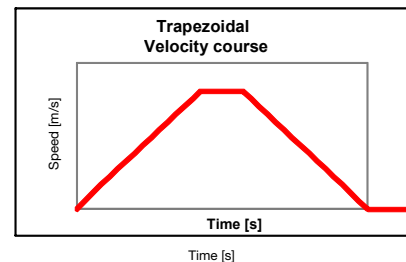

Thrust rod moving forth: Mass is moved downwards

Load case: Acceleration

$$F_{x,a,1} = 1000 \text{ N} + 30 \text{ N} + \left(150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left(4 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) = 151 \text{ N}$$

Load case: Constant Velocity

$$F_{x,a,2} = 1000 \text{ N} + 30 \text{ N} + \left(150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left(0 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) = -454 \text{ N}$$

Load case: Deceleration

$$F_{x,a,3} = 1000 \text{ N} + 30 \text{ N} + \left(150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left(-4 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) = -1058 \text{ N}$$

Thrust rod moving back: Mass is moved upwards

Load case: Acceleration

$$F_{x,e,4} = 1000 \text{ N} - 30 \text{ N} + \left(150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left(-4 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) = -1118 \text{ N}$$

Load case: Constant Velocity

$$F_{x,e,5} = 1000 \text{ N} - 30 \text{ N} + \left(150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left(0 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) = -514 \text{ N}$$

Load case: Deceleration

$$F_{x,e,6} = 1000 \text{ N} - 30 \text{ N} + \left(150 \text{ kg} + 0.15 \text{ kg} + 0.15 \text{ kg} + 1.85 \frac{\text{kg}}{\text{m}} \cdot 0.5 \text{ m} \right) \cdot \left(4 \frac{\text{m}}{\text{s}^2} + \sin(-90^\circ) \cdot 9.81 \frac{\text{m}}{\text{s}^2} \right) = 91 \text{ N}$$

Selection of the Size and Screw Lead

Required maximum axial force

Determine the maximum axial force (page 11) that the electro cylinder must provide.

Preselection of the electro cylinder

Using the calculated force required, compare the actual electro cylinder specifications (page 8) to determine which profile size will produce enough force.

Once you have determined a profile size, determine that the unit will physically fit in the space allowed by the application (including parallel or inline motor mounts).

Required maximum velocity

The maximum velocity of the electro cylinder depends on the stroke.

With the profile size selected, refer to the critical speed information (page 8) to determine which screw lead works best for the application at the needed stroke length.

When the precise stroke is defined, the velocity must again be verified.

Required maximum acceleration

The maximum acceleration depends on the screw lead and serves as an additional selection criterion for the suitable electro cylinder. It is listed in the "Technical Data" (page 8).

ETH - Electro Thrust Cylinder for ATEX Environment

Parker Hannifin has extended its well known ETH - High Force Electro Thrust Cylinder for the use in explosive atmospheres (ATEX). The new ETH ATEX offers all advantages of the well known ETH Electro Thrust Cylinder and offers even in explosive atmospheres precise motion, positioning, setting and actuating.

The ETH ATEX range is ATEX certified for device group II, category 2 in explosive gas atmospheres. In conjunction with the ATEX certified EX series servomotors, Parker Hannifin offers a complete drive package for such applications.



Target Market / Applications

A ATEX environment contains a mixture of air and flammable substances such as gas, vapor or fluids which are potentially explosive under atmospheric conditions. ATEX certificated devices are essential for the use under this conditions.

Typical applications:

- Oil & Gas Industry
- Chemical and pharmaceutical industries
- Food processing (distillery)
- Printing & Plastic Industry
- Energy (Generation of Bio gas, gas turbines)
- Automotive industry (Paint finish)
- Waste processing plants

How to proceed when projecting a ATEX Cylinder

- Project an ETH - Electro Thrust Cylinder by means of this catalogue
- Check by means of the document "ETH ATEX frame conditions for applications" [192-550006] whether the selected ETH - Electro Thrust Cylinder corresponds to all ATEX demands in your application.
- In case the conditions cannot be fulfilled, please choose a larger electro cylinder and recheck the application data (e.g. changed cycle times).
- A application specific release by measuring the self-heating with your application data in our company is possible (see "ETH ATEX frame conditions for applications" [192-550006]).


Service Life

Nominal service life^{1, 2}

The nominal service life of the electro cylinder can be determined with the aid of the diagrams page 14.

The forces calculated for each individual segment of the application cycle must be summarized into an equivalent axial force F_m "Calculating Required Axial Force" (page 11). If axial forces with different signs apply, two equivalent axial forces must be calculated:

- F_{m1} for all positive forces. The negative forces will convert to zero.
- F_{m2} for all negative forces. The positive forces will convert to zero.

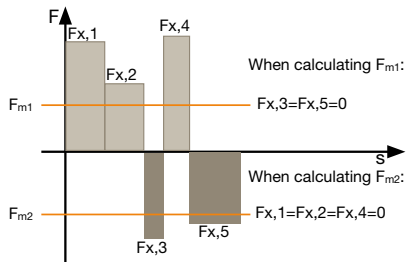

Calculation

$$F_{m1,2} = \sqrt[3]{\frac{1}{s_{total}} (F_{x,1}^3 \cdot s_1 + F_{x,2}^3 \cdot s_2 + F_{x,3}^3 \cdot s_3 + \dots)}$$

Formula 3

With the equivalent axial forces, the nominal service life L in km can be read off the diagrams on page 14.

With **load on both sides**, the nominal service life is:

$$L = (L_1^{-1.11} + L_2^{-1.11})^{-0.9}$$

Formula 3.1

Actual service life

The actual service life can only be approximated due to a variety of different effects. The nominal service life L calculation does, for instance, not take insufficient lubrication, impacts and vibrations or critical side loads into consideration. These effects can however be estimated with the aid of the application factor f_w .

The actual service life is calculated as follows:

$$L_{fw} = \frac{L}{f_w^3}$$

Formula 4

Application factor f_w

Movement cycle	Shocks/vibrations			
	none	light	medium	heavy
More than 2.5 screw rotations	1.0	1.2	1.4	1.7
1.0 to 2.5 screw rotations ³⁾ (short stroke applications)	1.8	2.1	2.5	3.0

³⁾After max. 10 000 movement cycles, a lubrication run must be performed (see lubrication run intervals for short stroke applications)

Boundary conditions for application factor f_w :

- Externally guided electro cylinders
- Accelerations $< 10 \text{ m/s}^2$

If your application factor is < 1.5 , please contact Parker.

The same applies for detailed calculations or for special boundary conditions.

Lubrication run lengths for short stroke applications

Lengths of lubrication runs [mm]	ETH032			ETH050			ETH080			ETH100		ETH125	
	M05	M10	M16	M05	M10	M20	M05	M10	M32	M10	M20	M10	M20
	>45	>54	>58	>40	>46	>58	>47	>65	>95	>102	>140	>122	>210

Abbreviations used (formula 3-4)

- F_m = Equivalent axial force in N
 $F_{x,j}$ = Resulting axial force in N (see formula 1 & formula 2, page 11)
 s_j = Travel given a defined force $F_{x,a,j}$ in mm
 s_{total} = Total travel in mm
 L = Nominal service life in km (see "Service Life" diagrams page 14)
 L_{fw} = Service life respecting the application factor in km
 f_w = Application factor (see table "Application factor" page 13)

Index "j" for the individual segments of the application cycle

If you need the service life as the number of possible cycles, just divide the service life in kilometers by twice the stroke traveled. i.e. Standstill times are not taken into consideration when determining the equivalent axial force (F_m), as $s_i=0$. Caution, do always consider the stroke as well as the return stroke.


¹The nominal service life is the service life reached by 90 % of a sufficient number of similar electro cylinders until the first signs of material fatigue occur.

²ATEX cylinders feature a reduced the service life. Please note the brochure on "intended use" (192-550004).


Diagrams ²

The given values apply when adhering to the recommended lubrication intervals (see relubrication). The diagrams were established in accordance with DIN ISO 3408-5


ETH032

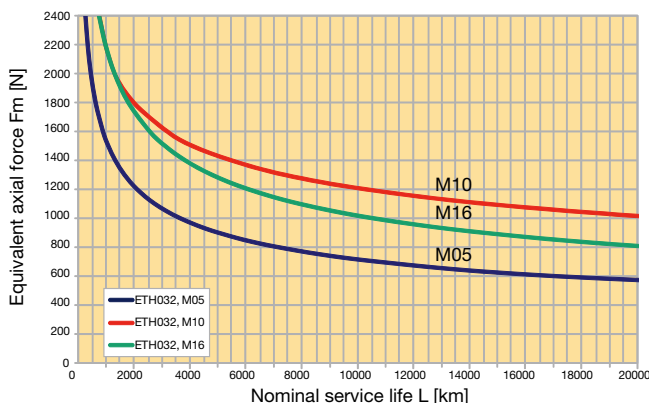


ETH050

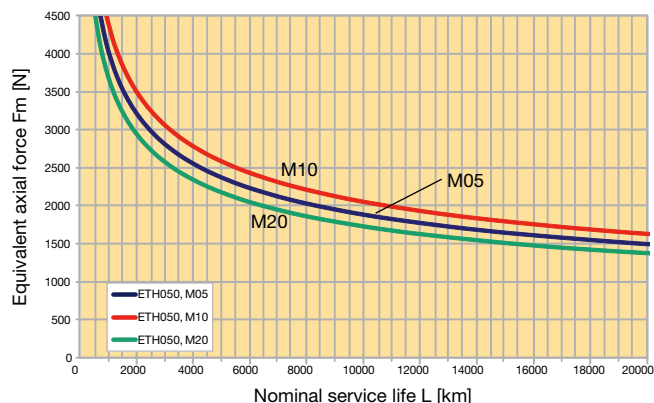


ETH080

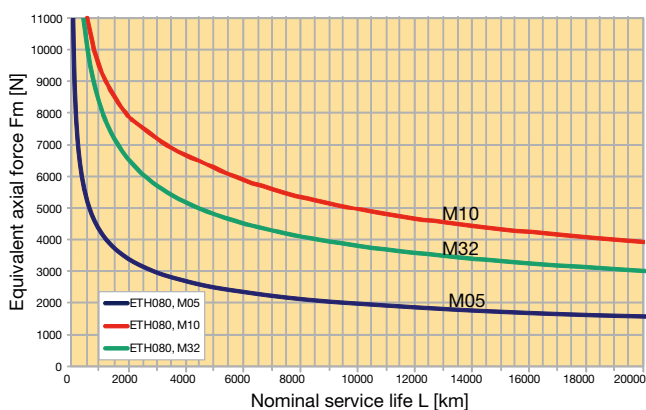

ETH100

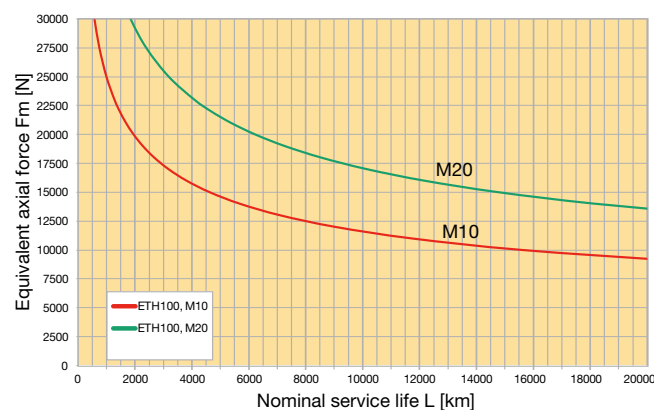

ETH125

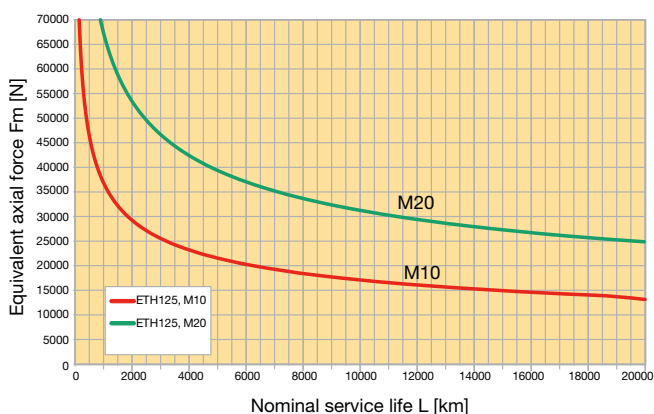

Prerequisites for nominal service life

- Bearing and screw temperature between 20 °C and 40 °C.
- No impairment of the lubrication, for example by external particles.
- Relubrication in accordance with the specifications.
- The given values for thrust force, speed and acceleration must be adhered to at any rate.
- No approaching the mechanical end stops (external or internal), no other abrupt loads, as the given maximum

force of the cylinder may never be exceeded.

- No external side loads
- Application factor $f_w = 1$. In order to calculate the real service life and the corresponding application factor, please refer to chapter "Service Life" see page 13
- No high exploitation of several power features at a time (for example maximum speed or thrust force).
- No regulating oscillation at standstill.

² ATEX cylinders feature a reduced the service life. Please note the brochure on "intended use" (192-550004).

Permissible Axial Thrust Forces


Limited by the risk of buckling, depending on the stroke and the mounting method; traction forces do not pose any buckling risk.

Please check if the maximum axial force ((page 11)) is possible with the planned mounting method and for the desired stroke

Diagrams


Case 1

Cylinders fixed with mounting flanges, foot mounting or mounting plates.
Cylinder always fixed at the front end as well.
Thrust rod with axial guiding.

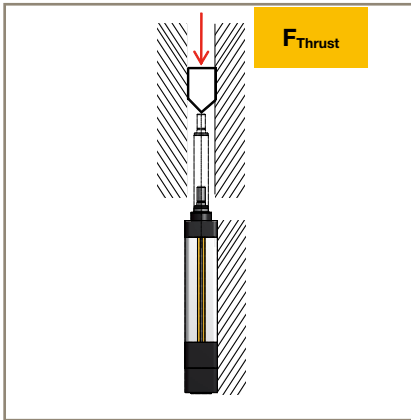


Case 2

Cylinders fixed with mounting flanges, foot mounting or mounting plates.
Cylinder always fixed at the front end as well.
Thrust rod without axial guiding. External force applied axially with respect to cylinder axis.

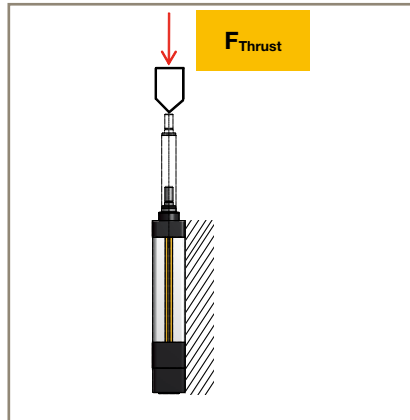


Case 3


Cylinder mounted with center trunnion, rear clevis or any other rear fixing material (e.g. rear mounting plate).
Thrust rod with axial guiding.

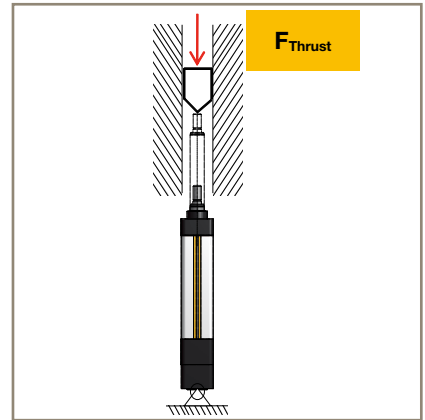


ETH032 - Case 1

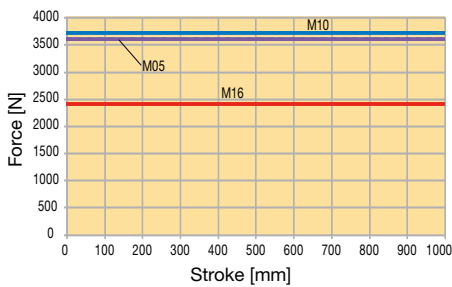


ETH032 - Case 2

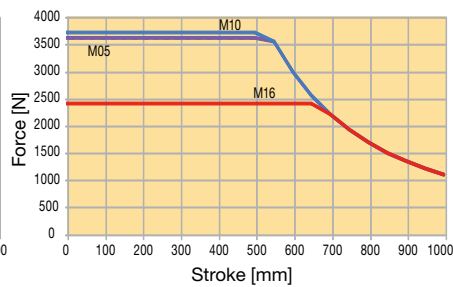


ETH032 - Case 3

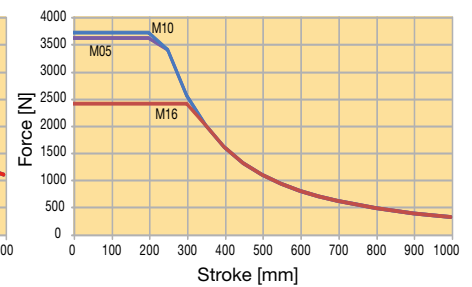


ETH050 - Case 1

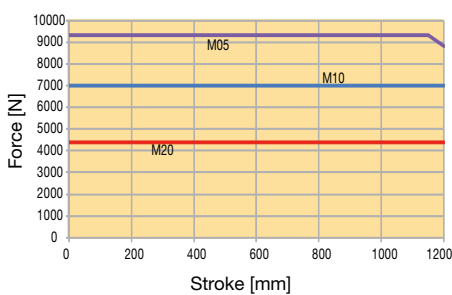

ETH050 - Case 2

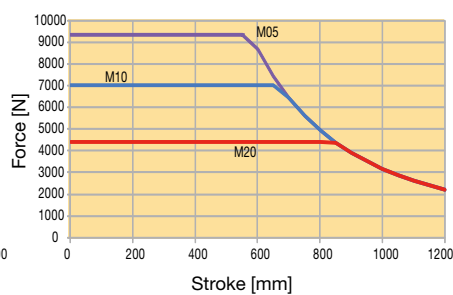


ETH050 - Case 3

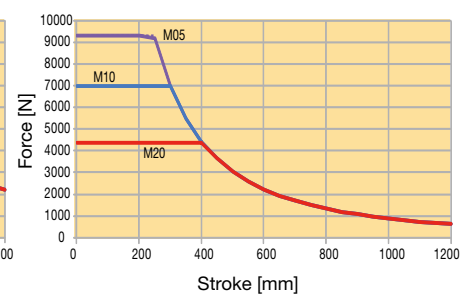

ETH - Electro Cylinder Permissible Axial Thrust Forces


Case 1

Cylinders fixed with mounting flanges, foot mounting or mounting plates.
Cylinder always fixed at the front end as well.
Thrust rod with axial guiding.

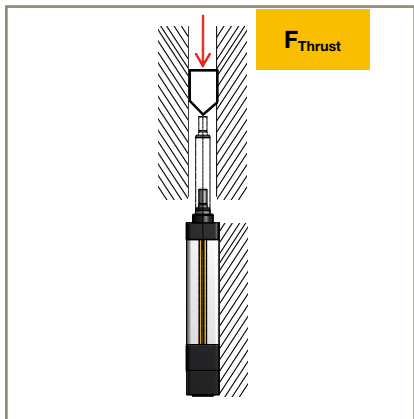


Case 2

Cylinders fixed with mounting flanges, foot mounting or mounting plates.
Cylinder always fixed at the front end as well.
Thrust rod without axial guiding. External force applied axially with respect to cylinder axis.

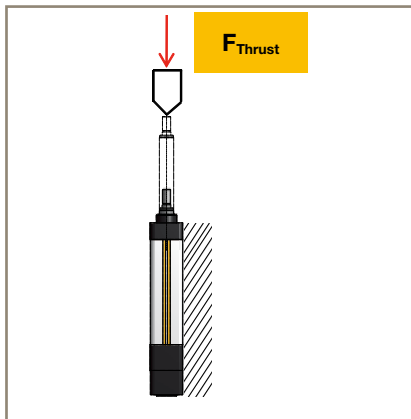


Case 3


Cylinder mounted with center trunnion, rear clevis or any other rear fixing material (e.g. rear mounting plate).
Thrust rod with axial guiding.

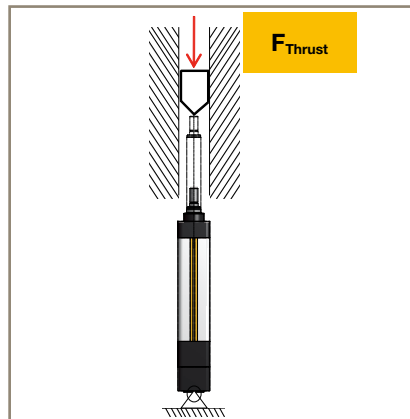


ETH080 - Case 1

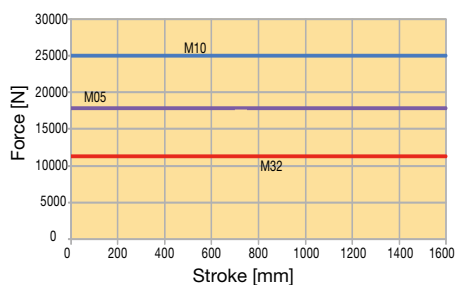


ETH080 - Case 2

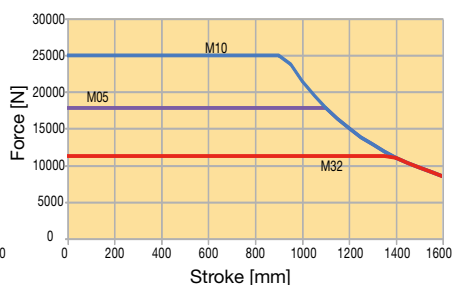


ETH080 - Case 3

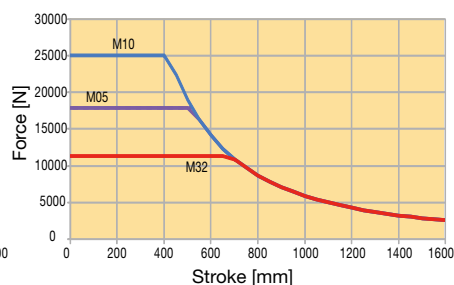


ETH100 - Case 1

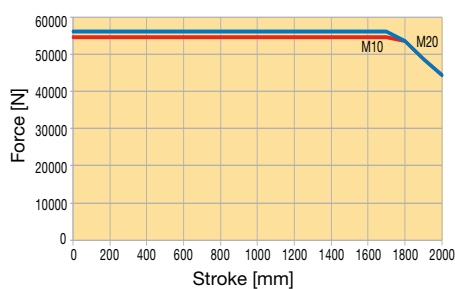


ETH100 - Case 2

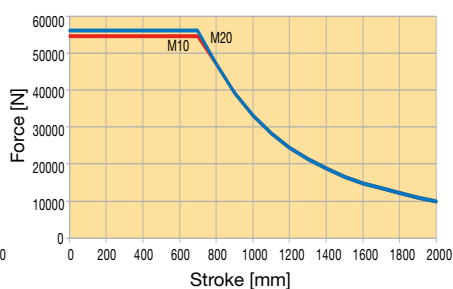


ETH100 - Case 3

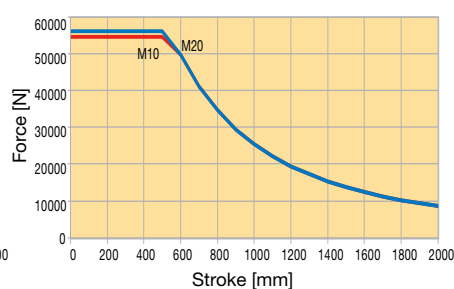


ETH125 - Case 1

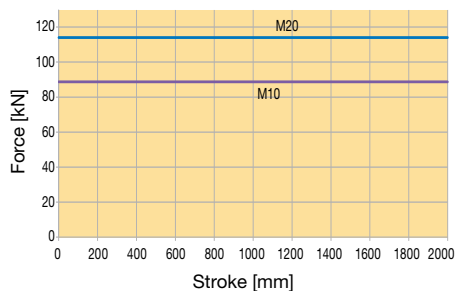

ETH125 - Case 2

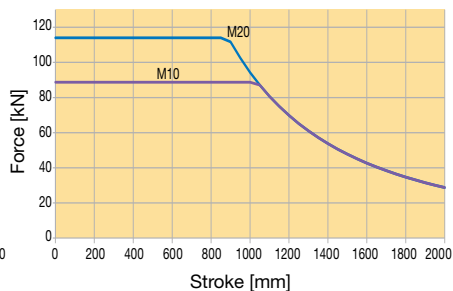


ETH125 - Case 3

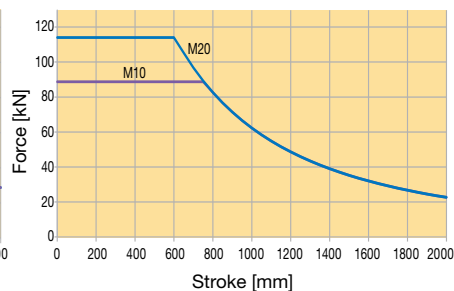

Permissible Side Load ¹⁾


The electro cylinder features a generously dimensioned cylinder rod and screw nut bearing in the form of high-quality plastic sliding elements to absorb the side load. Please note that electro cylinders with a longer stroke permit a higher lateral force at the same extension length. It may therefore be useful to choose a longer stroke

Permissible lateral forces in vertical mounting position







than required for the application in order to increase the permissible lateral force. If the permissible lateral forces are exceeded or if the maximum axial force occurs at the same time, the optional outrigger bearing (option R) must be used.

Permissible lateral forces in horizontal mounting position

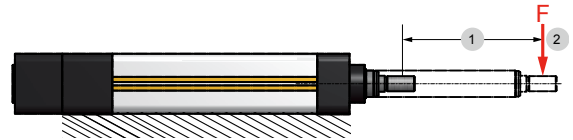


- 1: Extended length
2: Force application - at the middle of the cylinder rod thread

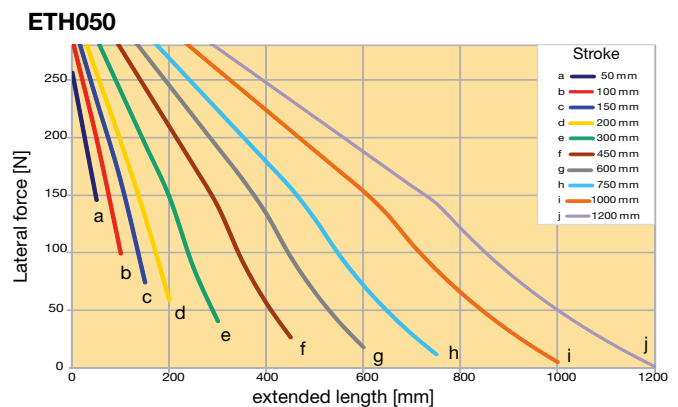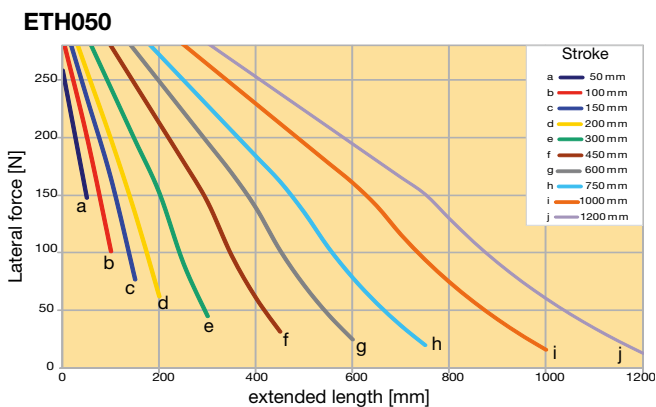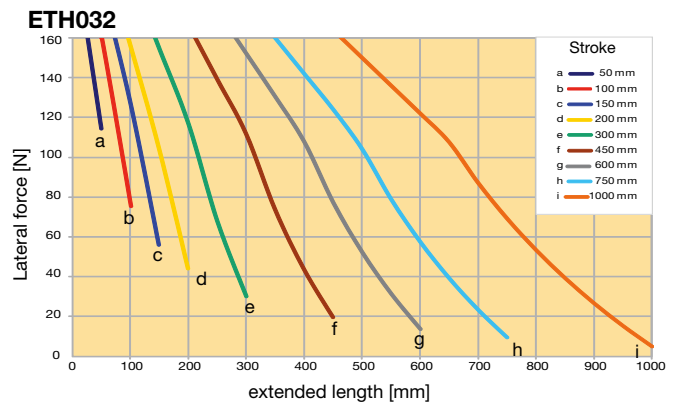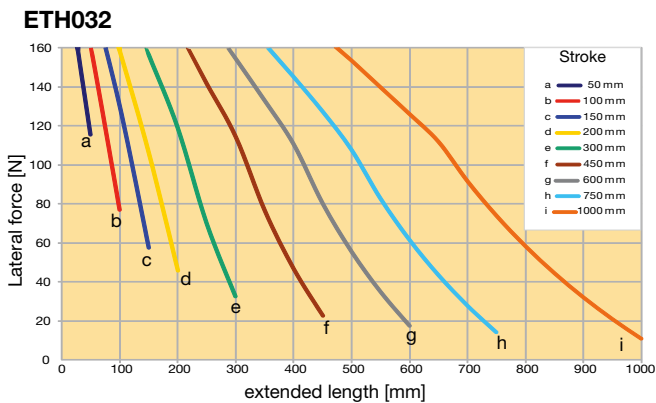


The diagrams apply for an ambient temperature of 20 °C, for all housing orientations and a medium travel speed of 0.5 m/s, (ETH032, ETH050, ETH080) or 0.25 m/s (ETH100, ETH125).

¹⁾ For ATEX cylinders, side loads are not permitted!

Permissible lateral forces in vertical mounting position




Permissible lateral forces in horizontal mounting position

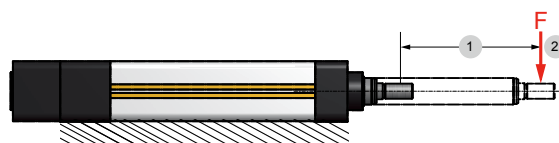


1: Extended length
2: Force application - at the middle of the cylinder rod thread


ETH080

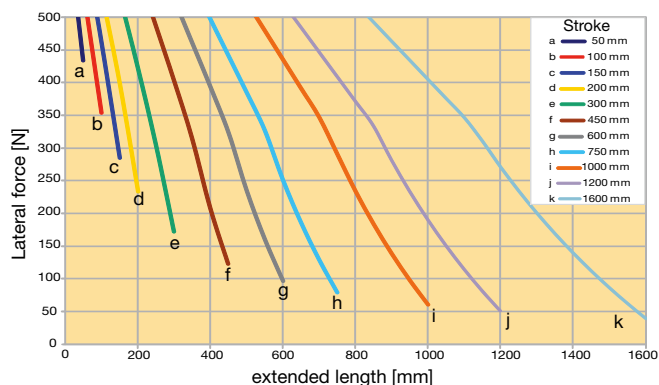


ETH080

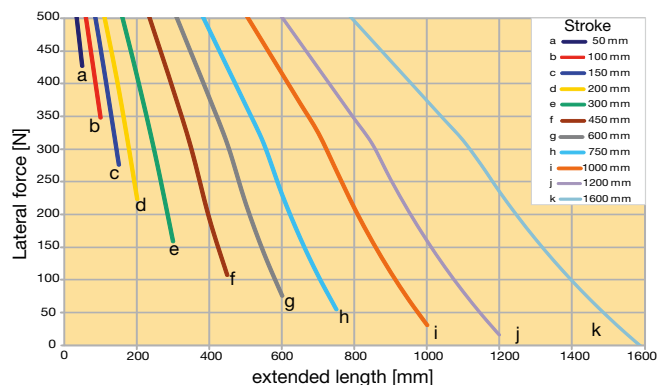


ETH100

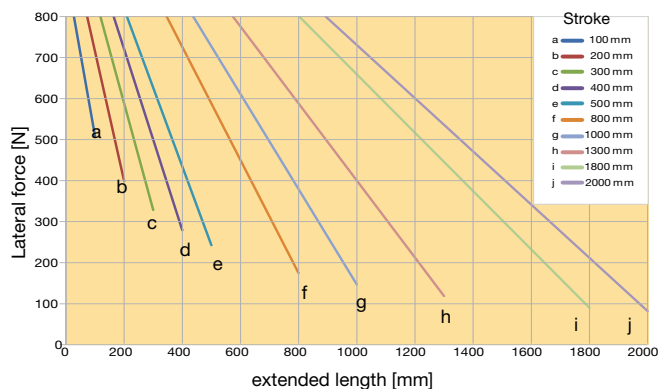


ETH100

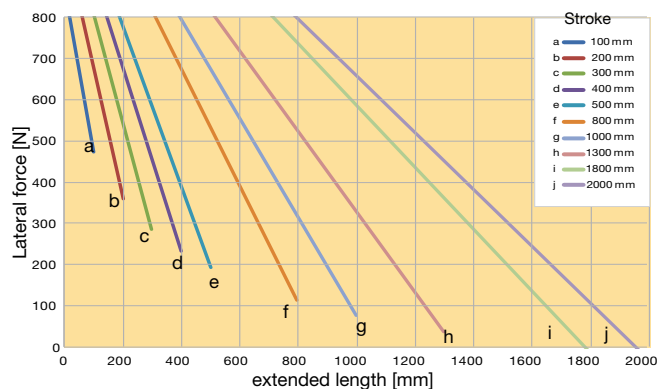

ETH125

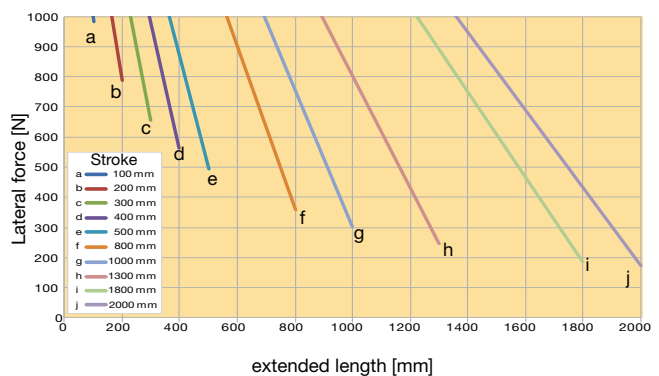

ETH125

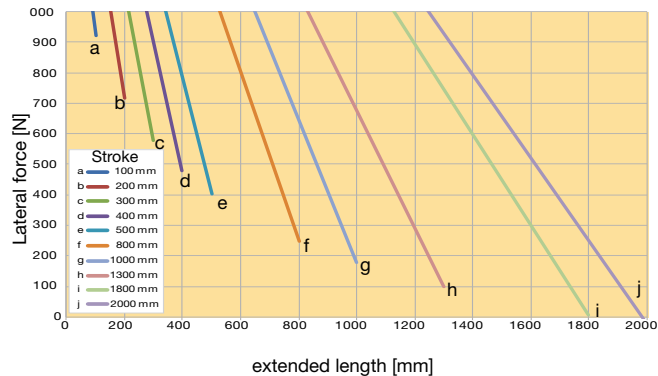

The diagrams apply for an ambient temperature of 20 °C, for all housing orientations and a medium travel speed of 0.5 m/s, (ETH032, ETH050, ETH080) or 0.25 m/s (ETH100, ETH125).

1) For ATEX cylinders, side loads are not permitted!

Stroke, Usable Stroke and Safety Travel


Calculation

Stroke:

The stroke to be indicated in the order code is the mechanically maximal possible stroke between the internal end stops.

Usable stroke:

The usable stroke is the distance which you need to move in your application. It is always shorter than the stroke.

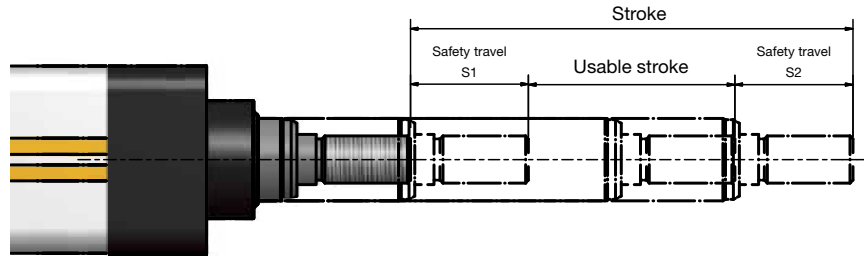

Safety travel (S1 & S2):


The safety travels are required to slow down the cylinder after it has passed a limit switch, Emergency stop in order to avoid contact with the mechanical limit stops.

Depending on the screw lead and the maximum speed, the following diagram recommends a minimum

safety travel, which is sufficient for most applications according to experience.

With demanding applications (great masses and high dynamic), the safety travel has to be calculated and enlarged accordingly (dimensioning on demand).


Diagram

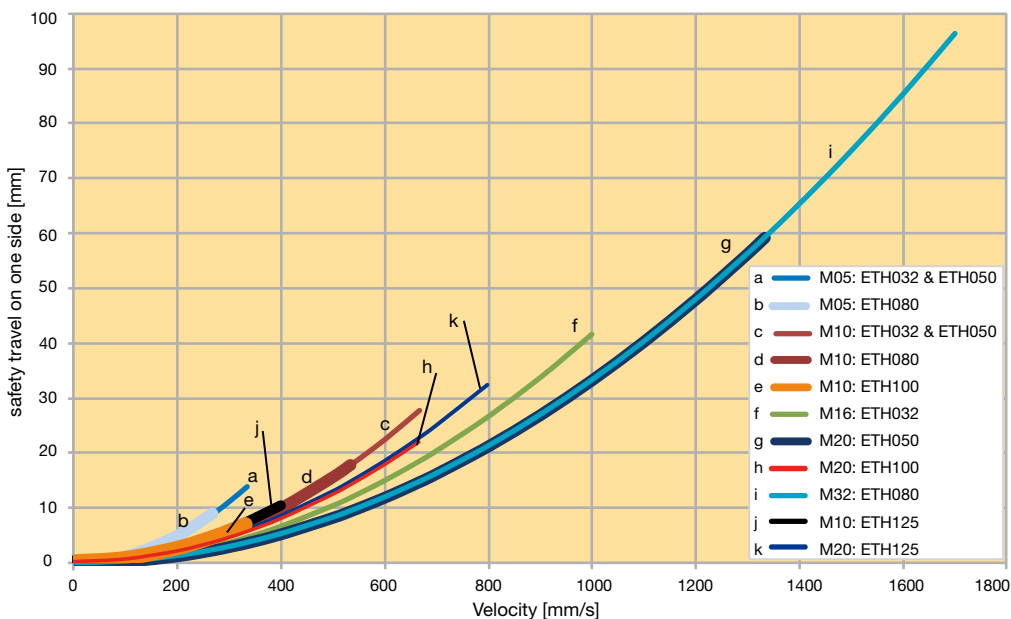

Information: The safety travel taken from the diagram applies for one side. I.e. the diagram value must be multiplied by factor 2 in order to get the total safety travel. The diagram is based on the maximum screw acceleration / deceleration


Relubrication

All frame sizes include a standard Easy lubrication port for lubricating the screw nut (designation "1" in the order code page 54).

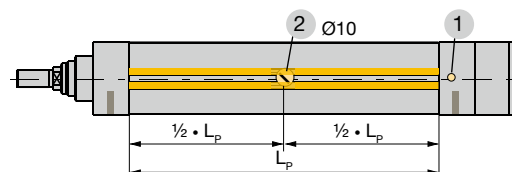

- 1: Central lubrication (standard)
- 2: Optional lubrication (possible on all 4 sides).
- L_p : Length of profile

Option 1: Central lubrication (standard)

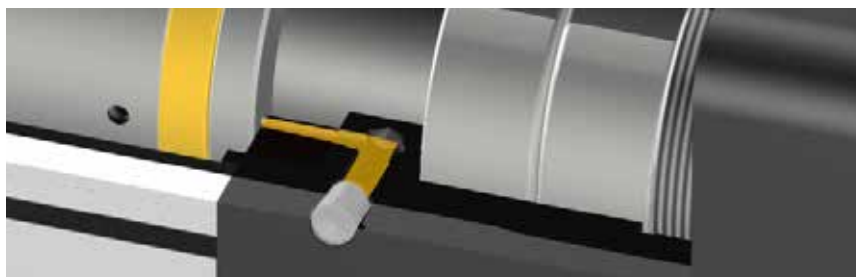

Relubrication is simple with the easy access port. Users simply perform a controlled retract of the cylinder approaching the end stop under slow speed and grease the cylinder. Central relubrication orientation is always envisaged in a 3 o'clock position.

Option 2...5: Middle lubrication via an opening in the profile




If a space constraint does not allow easy access to the standard lubrication port, other options in the part number configuration allow for a port at the center of the extrusion. Free access to this bore even after integration of the cylinder into a system can be ensured by choosing the corresponding profile orientation (see order code page 54). The bore is located exactly in the middle of the aluminum profile.

Dimensions


Electro Cylinder

prepared for inline motor mounting

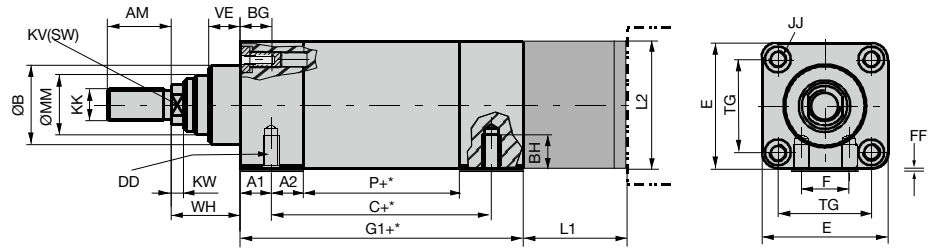

Electro Cylinder

prepared for parallel motor mounting

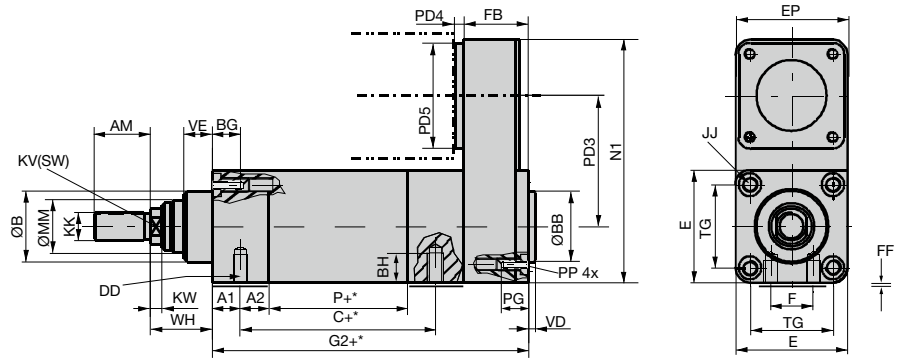

+* = Measure + length of desired stroke

Dimensions Standard (IP-Version)

Cylinder size	Unit	ETH032			ETH050			ETH080			ETH100		ETH125	
Screw lead		M05	M10	M16	M05	M10	M20	M05	M10	M32	M10	M20	M10	M20
C	[mm]	93.6 (93.6)	102.6 (102.6)	106.6 (106.6)	99.5 (100.5)	105.5 (106.5)	117.5 (118.5)	141.5 (142.5)	159.5 (160.5)	189.5 (190.5)	- ²⁾		- ²⁾	
G1	[mm]	133 (180.5)	142 (189.5)	146 (193.5)	154 (198.5)	160 (204.5)	172 (216.5)	197 (259.5)	215 (277.5)	245 (307.5)	323 (349.5)	361 (387.5)	461 (487.5)	549 (575.5)
G2	[mm]	180.5 (228.5)	189.5 (237.5)	193.5 (241.5)	194 (239)	200 (245)	212 (257)	257 (320)	275 (338)	305 (368)	451 (478.0)	489 (516.0)	624 (651.0)	712 (739.0)
P	[mm]	66	75	79	67	73	85	89	107	137	162	200	192	280
A1	[mm]	14 (60)			15.5 (58.5)			21 (82)			- ²⁾		- ²⁾	
A2	[mm]	17			18.5			32			- ²⁾		- ²⁾	
AM	[mm]	22			32			40			70		96	
BG (=BN+BS)	[mm]	16			25			26			32		44	
BN Usable length of thread	[mm]	11			20			20			22		33	
BS Depth of width across flat (without thread)	[mm]	5			5			6			10		11	
BH	[mm]	9			12.7			18.5			- ²⁾		- ²⁾	
DD mount thread ¹⁾	[mm]	M6x1.0			M8x1.25			M12x1.75			- ²⁾		- ²⁾	
E	[mm]	46.5			63.5			95			120		150	
EP	[mm]	46.5			63.5			95			175		220	
F	[mm]	16			24			30			- ²⁾		- ²⁾	
FF	[mm]	0.5			0.5			1.0			0		0	
JJ	[mm]	M6x1.0			M8x1.25			M10x1.5			M16x2		M20x2.5	
PP	[mm]	M16x2			M6x1.0			M8x1.25			M10x1.5		M20x2.5	
PG (Thread depth on the PA housing)	[mm]	25			BG (=BN+BS)			BG (=BN+BS)			BG (=BN+BS)		35	
KK	[mm]	M10x1.25			M16x1.5			M20x1.5			M42x2		M48x2	
KV	[mm]	10			17			22			46		55	
ØMM h9	[mm]	22			28			45			70		85	
TG	[mm]	32.5			46.5			72			89		105	
KW	[mm]	5			6.5			10			10		10	
N1	[mm]	126			160			233.5			347		450	
FB	[mm]	47.5 (48)			40 (40.5)			60 (60.5)			128 (128.5)		163 (163.5)	
VD	[mm]	4			4			4			4		5	
ØBB	[mm]	30 d11			40 d11			45 d11			90 d9		110 d8	
VE	[mm]	12			16			20			20		20	
WH	[mm]	26			37			46			51		53	
ØB	[mm]	30 d11			40 d11			60 d11			90 d8		110 d8	

⁽¹⁾ Thread "DD" is only mandatory for mounting method "F".


⁽²⁾ ETH100, ETH125 does not have a mounting thread on the underside.

Motor Mounting Options(P Series)


Dimensions [mm]

	Code	Motor / gearbox	Motor Dimensions				Motor mounting options				
			Pilot	Bolt circle	Ø Shaft	Shaft length	Inline		Parallel		
							L1	L2	PD3	PD4	PD5
ETH032	AAM	PM-FBL 01/02/04	50	70	14	30	67	60	67.5	14	60
	AAV	PM-FCL 03/04	70	90	14	40	77	80	67.5	14	80
ETH050	AAM	PM-FBL 01/02/04	50	70	14	30	64	65	87.5	14	65
	AAV	PM-FCL 03/04	70	90	14	40	74	82	87.5	15	82
	AAN	PM-FCL 05/06/07/08/10	70	90	19	40	84	86			
	AAW	PM-FE 03M/05G/06D/P9A/11D/15A	110	145	19	58	102	130			
ETH080	AAN	PM-FCL 05/06/07/08/10	70	90	19	40	94.5	96	130	15	96
	AAW	PM-FE 03M/05G/06D/P9A/11D/15A	110	145	19	58	109.5	130	130	22	130
	AAX	PM-FE 09M/13G/16D/22A	110	145	22	58	112.5	130	130	22	130
	AAO	PM-FE 12M/17G/22D/30A	110	145	24	58	112.5	130	130	22	130







Inline

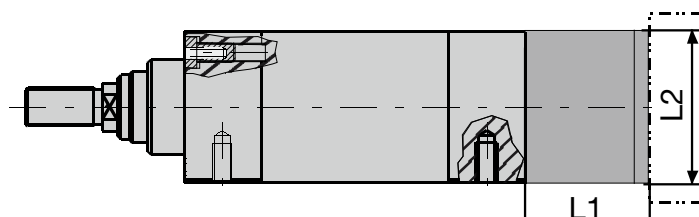

Parallel

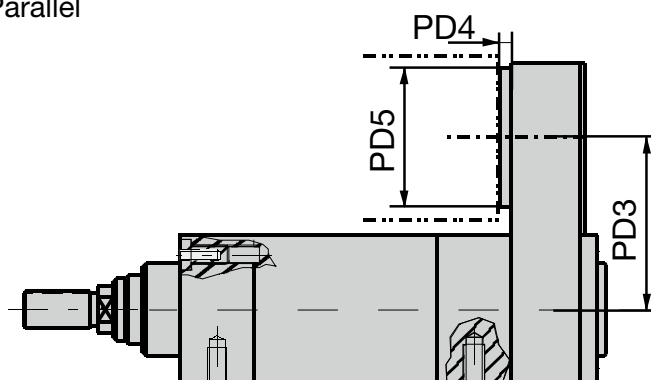

Motor Mounting Options

		Code			Motor Dimensions				Motor Mounting Option		
ETH032	inline	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2	
		AAA	K1A	SMH60-B8/9	40	63	9	20	60.0	60.0	
		AAA	K1A	MH56-B5/9	40	63	9	20			
		AAB	K1B	SMH60-B5/11	60	75	11	23	60.0	70.0	
		AAB	K1B	MH70-B5/11	60	75	11	23			
		AAB	K1B	NX3, EX3	60	75	11	23			
		AAC	K1C	SMH82-B8/14	80	100	14	30	67.0	82.0	
		BAA	P1A	PS60	50	70	16	40	77.0	63.5	
		BAJ	P1J	PV3	40	52	14	35	72.0	63.5	
	parallel	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
		AAA	K1A	SMH60-B8/9	40	63	9	20	67.5	9.0	60.0
		AAA	K1A	MH56-B5/9	40	63	9	20			
		AAB	K1B	SMH60-B5/11	60	75	11	23		9.0	70.0
		AAB	K1B	MH70-B5/11	60	75	11	23			
		AAB	K1B	NX3, EX3	60	75	11	23			
		AAC	K1C	SMH82-B8/14	80	100	14	30		14.0	82.0
		BAA	P1A	PS60	50	70	16	40		22.0	63.5
		BAJ	P1J	PV3	40	52	14	35		16.0	63.5
ETH050	inline	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2	
		AAB	K1B	SMH60-B5/11	60	75	11	23	59	70	
		AAB	K1B	MH70-B5/11	60	75	11	23	59	70	
		AAB	K1B	NX3, EX3	60	75	11	23	59	70	
		AAC	K1C	SMH82-B8/14	80	100	14	30	63	82	
		AAE	K1E	SMH82-B5/19	95	115	19	40	84	100	
		AAE	K1E	SMH100-B5/19	95	115	19	40	84	100	
		AAE	K1E	MH105-B5/19	95	115	19	40	84	105	
		AAD	K1D	MH105-B9/19	80	100	19	40	84	105	
		AAD	K1D	SMH82-B8/19	80	100	19	40	84	82	
		AAD	K1D	NX4, EX4	80	100	19	40	84	82	
		BAA	P1A	PS60	50	70	16	40	74	63.5	
		BAJ	P1J	PV3	40	52	14	35	69	63.5	
	parallel	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
		AAB	K1B	SMH60-B5/11	60	75	11	23	87.5	9	70
		AAB	K1B	MH70-B5/11	60	75	11	23		9	70
		AAB	K1B	NX3, EX3	60	75	11	23		9	70
		AAC	K1C	SMH82-B8/14	80	100	14	30		13	82
		AAF	K1F	SMH100-B5/14 ¹⁾	95	115	14	30		13	100
		BAA	P1A	PS60	50	70	16	40		24	63.5
		BAJ	P1J	PV3	40	52	14	35		16	63.5
ETH080	inline	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2	
		AAE	K1E	SMH82-B5/19	95	115	19	40	94.5	100	
		AAE	K1E	SMH100-B5/19	95	115	19	40	94.5	100	
		AAE	K1E	MH105-B5/19	95	115	19	40	94.5	100	
		AAD	K1D	MH105-B9/19	80	100	19	40	94.5	96	
		AAD	K1D	SMH82-B8/19	80	100	19	40	94.5	96	
		AAD	K1D	NX4, EX4	80	100	19	40	94.5	96	
		AAK	K1K	MH145-B5/24	130	165	24	50	104.5	145	
		AAK	K1K	SMH142-B5/24	130	165	24	50	104.5	145	
		AAJ	K1J	MH105-B6/24	110	130	24	50	104.5	116	
		AAJ	K1J	SMH115-B7/24	110	130	24	50	104.5	116	
		AAJ	K1J	NX6, EX6	110	130	24	50	104.5	116	
		BAB	P1B	PS90	80	100	22	52	106.5	95	
		BAK	P1K	PV4	80	100	20	40	94.5	95	
	parallel	AKD	EME	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
		AAE	K1E	SMH82-B5/19	95	115	19	40	130	15	100
		AAE	K1E	SMH100-B5/19	95	115	19	40		15	100
		AAE	K1E	MH105-B5/19	95	115	19	40		15	100
		AAD	K1D	MH105-B9/19	80	100	19	40		15	96
		AAD	K1D	SMH82-B8/19	80	100	19	40		15	96
		AAD	K1D	NX4, EX4	80	100	19	40		15	96
		AAK	K1K	MH145-B5/24	130	165	24	50		15	145
		AAK	K1K	SMH142-B5/24	130	165	24	50		15	145
		AAJ	K1J	MH105-B6/24	110	130	24	50		15	116
		AAJ	K1J	SMH115-B7/24	110	130	24	50		15	116
		AAJ	K1J	NX6, EX6	110	130	24	50		15	116
		BAB	P1B	PS90	80	100	22	52		30	95
		BAK	P1K	PV4	80	100	20	40		12	95

¹⁾ Order Code SMH100-B5/14: " SMH100-...ET..." (the motor shaft diameter is replaced by the term "ET")
(not in the motors catalog) only with feedback: Resolver, A7

Motors always with key groove on the output shaft. Additional motor mounting options upon request.





See site for details:

Motors

www.parker.com/eme/smh
www.parker.com/eme/mh
www.parker.com/eme/nx
www.parker.com/eme/ex
http://solutions.parker.com/AUG_EM

Gearboxes

www.parkermotion.com

				Motor Dimensions				Motor mounting options		
ETH100	inline	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2	
		K1H	SMH100-B5/24	95	115	24	50	155	140	
		K1H	MH105-B5/24	95	115	24	50	155	140	
		K1J	SMH115-B7/24, NX6, EX6	110	130	24	50	155	140	
		K1K	SMH142-B5/24	130	165	24	50	155	145	
		K1K	MH145-B5/24	130	165	24	50	155	145	
		K1L	MH205-B5/38	180	215	38	80	185	205	
		K1L	SMH170-B5/38	180	215	38	80	185	205	
		P1C	PS115	110	130	32	68	175	140	
		P1D	PS142	130	165	40	102	207	142	
		P1J	PV5	110	130	25	55	160	140	
	parallel	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
		K1H	SMH100-B5/24	95	115	24	50	176	23	155
		K1H	MH105-B5/24	95	115	24	50		23	155
		K1J	SMH115-B7/24, NX6, EX6	110	130	24	50		23	155
		K1K	SMH142-B5/24	130	165	24	50		22	155
		K1K	MH145-B5/24	130	165	24	50		22	155
		K1L	MH205-B5/38	180	215	38	80		27	205
		K1L	SMH170-B5/38	180	215	38	80		27	205
		P1C	PS115	110	130	32	68		38	155
		P1D	PS142	130	165	40	102		45	155
		P1J	PV5	110	130	25	55		23	155
ETH125				Motor Dimensions				Motor mounting options		
	inline	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	L1	L2	
		K1L	SMH170	180	215	38	80	209.5	205	
		K1L	MH205	180	215	38	80	209.5	205	
		K1M	MH265	250	300	48	110	239.5	264	
		P1C	PS115	110	130	32	68	197.5	170	
		P1D	PS142	130	165	40	102	231.5	170	
		P1K	PV7	120	140	40	97	226.5	205	
	parallel	Code	Motor / gearbox	Pilot	Bolt circle	Ø Shaft	Shaft length	PD3	PD4	PD5
		K1L	SMH170	180	215	38	80	224	25	205
		K1L	MH205	180	215	38	80		25	205
		K1M	MH265	250	300	48	110		45	264
		P1C	PS115	110	130	32	68		32	185
		P1D	PS142	130	165	40	102		45	185
		P1K	PV7	120	140	40	97		42	205

Additional motor mounting options on request.

Details on the Internet:

Motors

www.parker.com/eme/smh
www.parker.com/eme/mh
www.parker.com/eme/nx
www.parker.com/eme/ex
http://solutions.parker.com/AUG_EM

Gearboxes

www.parkermotion.com

Motor and Gearbox Selection

Drive torque calculation

The torques to be produced by the motor result from the acceleration, the load and the friction torque. The drive torques must be calculated for all segments of the application cycle (represented by index "j")

Calculation of the **acceleration torque** with respect to the rotary moments of inertia:

$$M_{B,j} = \left((J_{i/p,0} + J_{i/p,Stroke} \cdot Stroke) \cdot \frac{1}{\eta_{ETH}} \cdot \frac{1}{i_G^2 \cdot \eta_G} + J_G + J_M \right) \cdot 10^{-3} \cdot \frac{6.28 \cdot a_{K,j}}{P_h}$$

only with gearbox

Formula 5

The acceleration forces due to the translatory moved masses are taken into consideration in the calculation of the axial forces on (page 11).

The **load torques** result from the occurring axial forces:

$$M_{L,j} = \frac{F_{x,a/e,j}}{\text{Thrust force factor}} \cdot \frac{1}{i_G \cdot \eta_G}$$

only with gearbox

Formula 6

The motor must therefore generate the following drive torques:

$$M_{M,j} = M_{B,j} + M_{L,j}$$

Formula 7

The **effective torque** can be deduced from the drive torques for all segments of the application cycle (formula 7):

$$M_{eff} = \sqrt[2]{\frac{1}{t_{total}} \cdot (M_{M1}^2 \cdot t_1 + M_{M2}^2 \cdot t_2 + \dots)}$$

Formula 8

Motor dimensioning

- The nominal torque of the motor must exceed the calculated effective torque (formula 8).
- The peak torque of the motor must exceed the maximum occurring drive torque (formula 7).

With the aid of the "motor mounting options" chart you can check if the respective motor is mechanically compatible to the corresponding electro cylinder.

Abbreviations used (formula 5-8)


$M_{B,j}$	= Variable acceleration torque in Nm
$J_{i/p,0}$	= Red. rot. mass moment of inertia at zero stroke for inline/parallel motor configuration in kgmm ² see "Technical Data" page 8
$J_{i/p,Stroke}$	= Red. rot. mass moment of inertia per mm of stroke for inline/parallel motor configuration in kgmm ² see "Technical Data" page 8
Stroke	= Selected stroke in mm
η_{ETH}	= Efficiency of the electro cylinder 0.9 (inline drive configuration) 0.81 (parallel motor)
i_G	= Gearbox ratio
η_G	= Efficiency of the gearbox (see gearbox manufacturer specifications)
J_M	= Motor mass moment of inertia in kgmm ² (see motor manufacturer specifications)
J_G	= Gearbox mass moment of inertia in kgmm ² (see gearbox manufacturer specifications)
$a_{K,j}$	= Acceleration at the cylinder rod in m/s ²
P_h	= Screw pitch in mm
$M_{L,j}$	= Load torque in Nm
$F_{x,a/e,j}$	= Loads in x direction in N (see page 11)
$M_{M,j}$	= Drive torque in Nm
M_{eff}	= Effective value - motor in Nm
t_{total}	= Total cycle time in s
t_j	= Amount of time in the cycle in s

Force constant: "Technical Characteristics" see page 8.
Index "j" for the individual segments of the application cycle


Mounting Methods

Please respect the notes in the ETH Manual (19x-550002) on the permissible screws and tightening torques.


Standard



ETH032-ETH125




Example for parallel motor configuration




Mounting via thread on the cylinder front or end side with parallel motor configuration (ETH032-ETH125).
("Dimensions" see page 21)

ETH032-ETH080

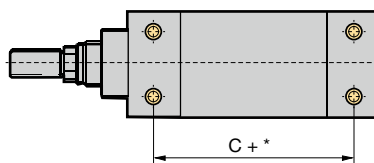

Mounting with 4 mounting threads on the underside of the profile.
(ETH032-ETH080).
("Dimensions" see page 21)

Center Trunnion Mounting

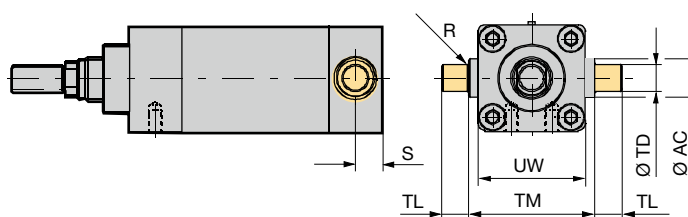


	UW	ØTD (h8)	R	TL	TM	ØAC	S
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	46.5	12	1	12	50	18	25.5
ETH050	63.5	16	1	16	75	25	39
ETH080	95.3	25	2	25	110	35	34.5
ETH100	120	40	4	40	140	70	57
ETH125	150	50	10	52	160	90	100

+* = Measure + Length of desired stroke ("Dimensions" see page 21).

Note: For relubrication option "1" (central lubrication port) please see mounting method with option "D" center trunnion always on 6 o'clock!

Rear Eye Mounting

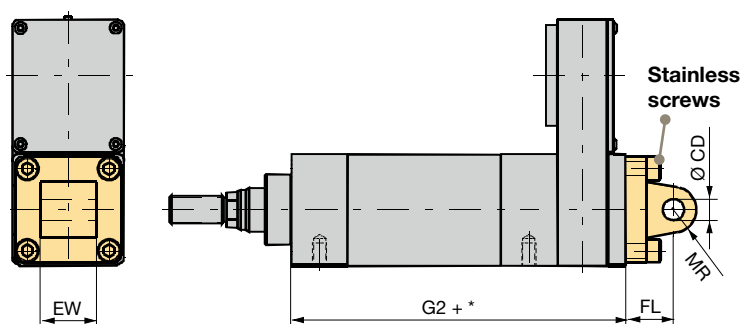


	Order no.	EW	ØCD	MR	FL ±0.2
		[mm]	[mm]	[mm]	[mm]
ETH032	0112.033	26	10 ^{+0.058} _{-0.010}	11	22
ETH050	0122.033	32	12 ^{+0.058} _{-0.010}	13	27
ETH080	0132.033	50	16 ^{+0.058} _{-0.010}	17	36
ETH100	0142.033	60	30 ^{+0.085} _{-0.010}	35	80
ETH125	0152.033	70	50 ^{+0.110} _{-0.010}	45	115


+* = Measure + Length of desired stroke ("Dimensions" see page 21).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Spare parts delivery is including screws for cylinder mounting.


Rear Clevis



ETH032-ETH080

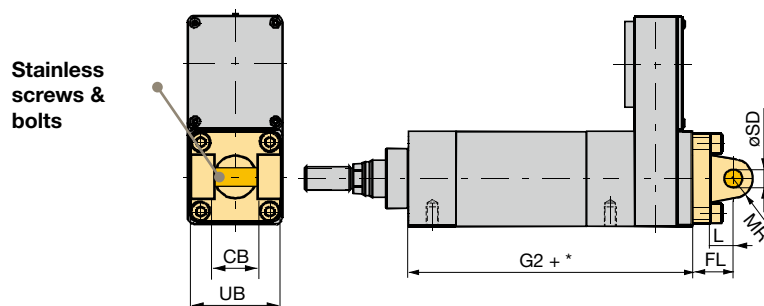

ETH100 & ETH125

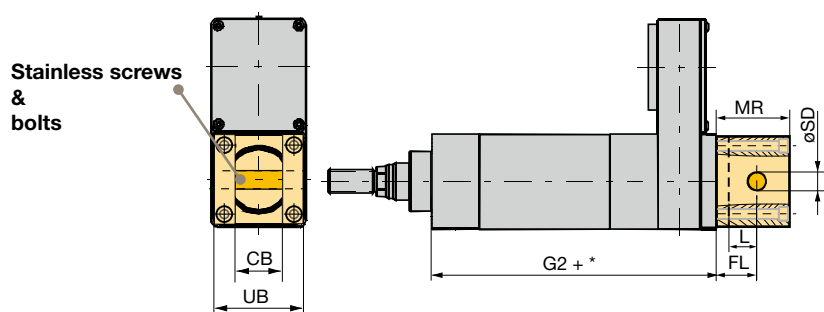

	Order no.	UB	CB	ØSD	MR	L	FL ±0.2
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	0112.031	46.5	26	10 h9	9.5	13	22
ETH050	0122.031	63.5	32	12 h9	12.5	16	27
ETH080	0132.031	95	50	16 h9	17.5	22	36
ETH100	0142.031	120	60.5	30 f7	100	40	65
ETH125	0152.031	150	70.5	50 f7	145	55	90

+* = Measure + length of desired stroke ("Dimensions" see page 21).


Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Spare parts delivery is including screws for cylinder mounting.

Bearing Block


Counter piece of rear clevis. Please order separately with order no., if required

Dimensions [mm]


Bearing block for ETH032, Part No. 0112.039

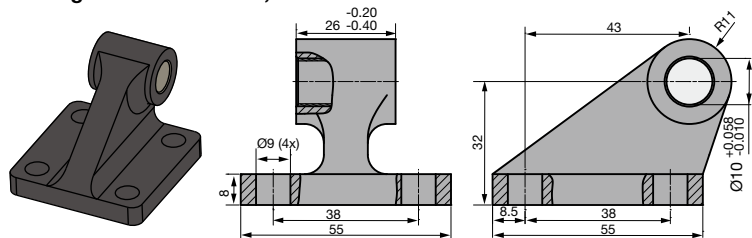


Bearing block for ETH050, Part No. 0122.039

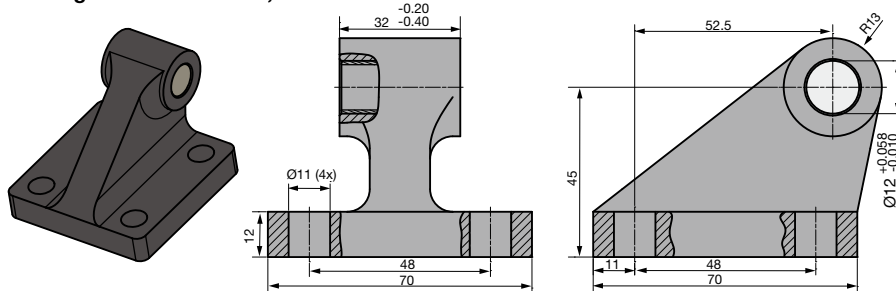


Bearing block for ETH080, Part No. 0132.039

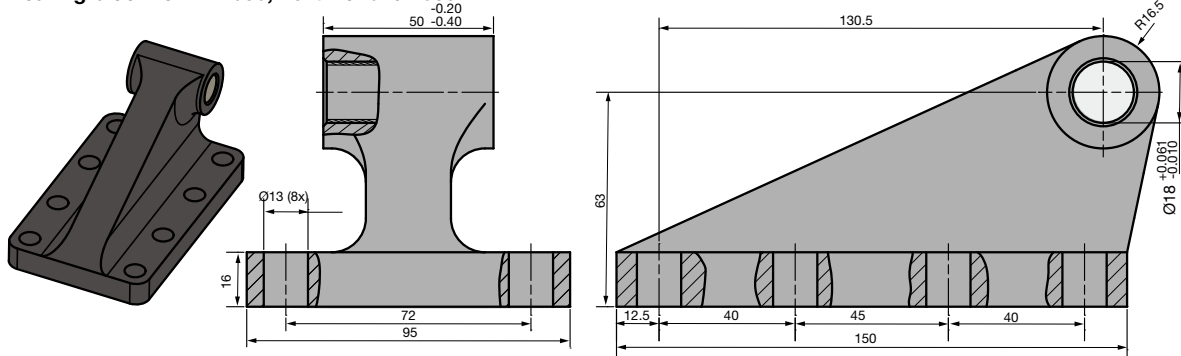



Bearing block for ETH100, Part No. 0142.039

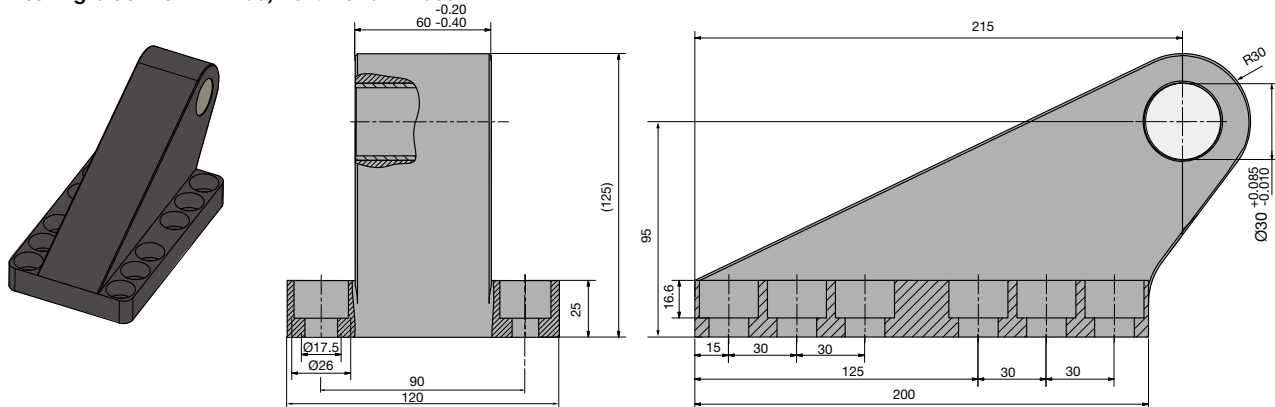


Bearing block for ETH125, Part No. 0152.039

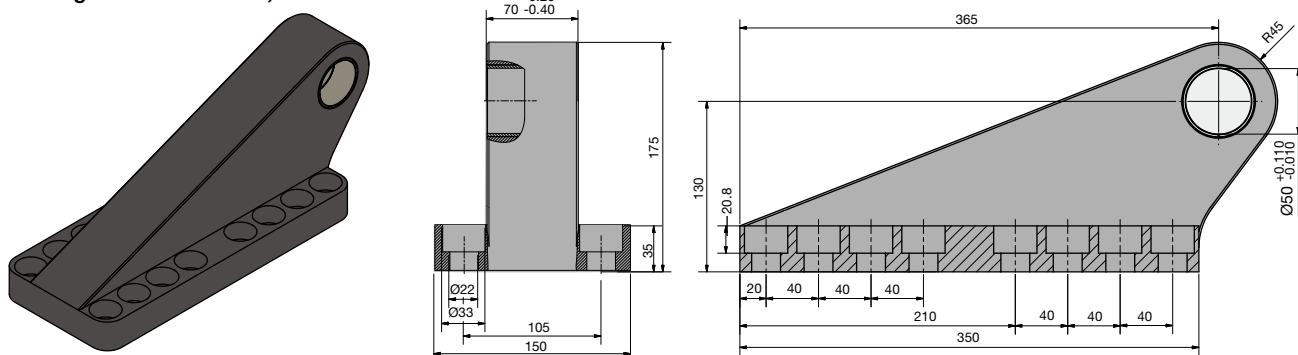



Rear Plate

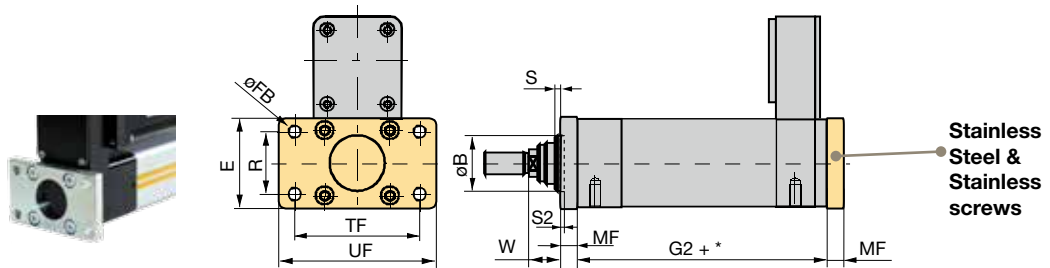

Front Plate

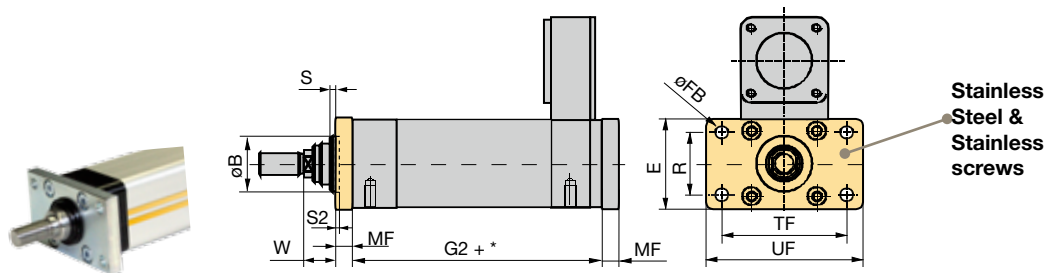

Front and Rear Plate

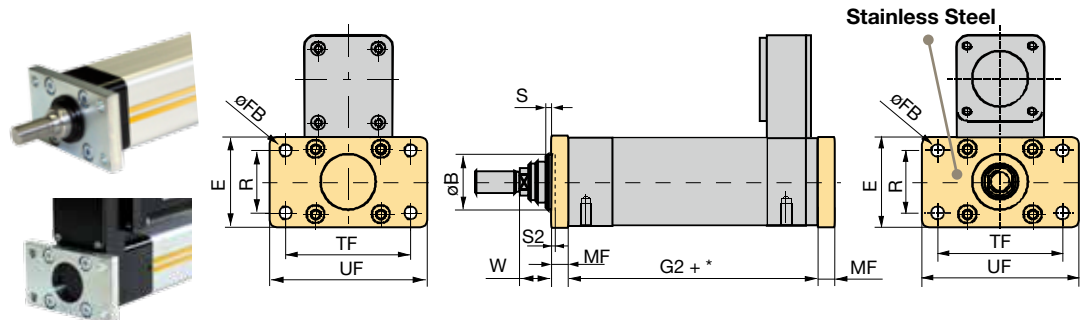

End plate (H) and front plate (J) dimensions

	Order no. (1 piece)	UF	E	TF	ØFB	R	W	MF	ØB Rear Plate	ØB Front plate	S	S2
		[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	0112.918	80	48	64	7	32	16	10	30		2	-
ETH050	0122.918	110	65	90	9	45	25	12	40		4	-
ETH080	0132.918 (Rear Plate) 0132.919 (Front plate)	150	95	126	12	63	30	16	45	60	4	-
ETH100	0142.918	258	120	220	17.5	80	26	25	90		-	5
ETH125	0152.918	320	150	270	21.5	100	13	40	110		-	20

+* = Measure + Length of desired stroke ("Dimensions" see page 21).


Listed in the order code of the cylinder; the order number applies only for ordering spare parts.

Please note that front and rear plate as spare parts must be ordered separately.


Spare parts delivery is including screws for cylinder mounting.

Stainless components only available for ETH032-ETH100.

Foot Mounting





ETH032-ETH080

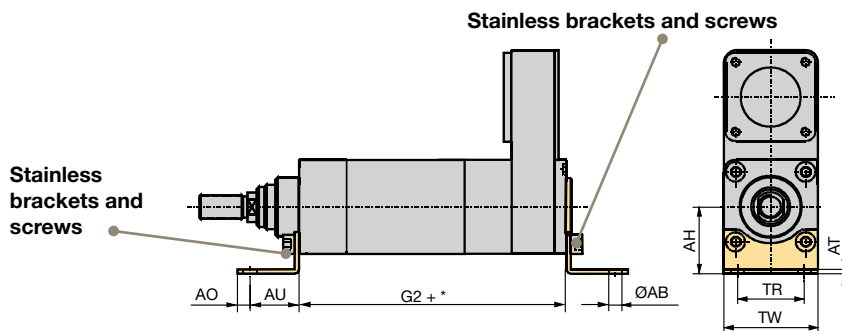

	Order no. Front & Terminal bracket	AH	AT	TR	ØAB (H14)	AO	AU	TW
		[mm]						
ETH032	0112.916	32	4	32	7	8	24	46.5
ETH050	0122.916	45	4	45	9	12	32	63.5
ETH080	0132.916	63	6	63	13.5	15	41	95

ETH100 & ETH125

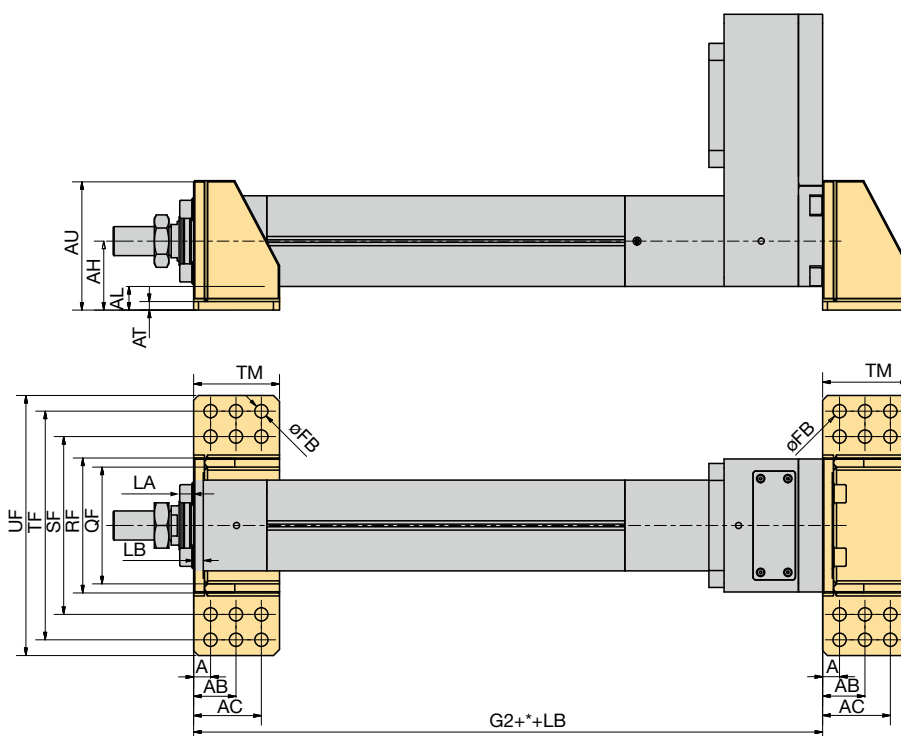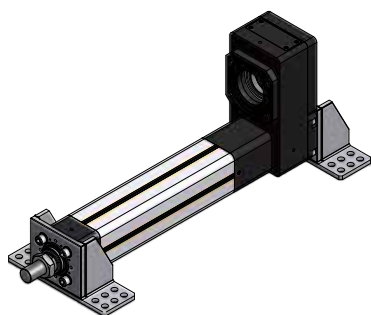

	Order no. Front & Terminal bracket	AU	AH	AL	AT	UF	TF	SF	RF	QF	LA	LB	ØFB	TM	A	AB	AC
		[mm]															
ETH100	0142.916	164	94	34	14	290	-	246	200	170	19	13	17.5	99	16.5	49.5	81.5
ETH125	0152.916	214	114	39	14	430	378	294	223	193	23	16	22	142	28	70	112

+* = Measure + Length of desired stroke ("Dimensions" see page 21).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Spare parts delivery is including screws for cylinder mounting.

Stainless components only available for ETH032-ETH080.


* For protection classes "B" and "C", we recommend GEOMET® coated screws (thin layer corrosion protection).

Mounting Flanges





ETH032-ETH080

Mounting Flanges

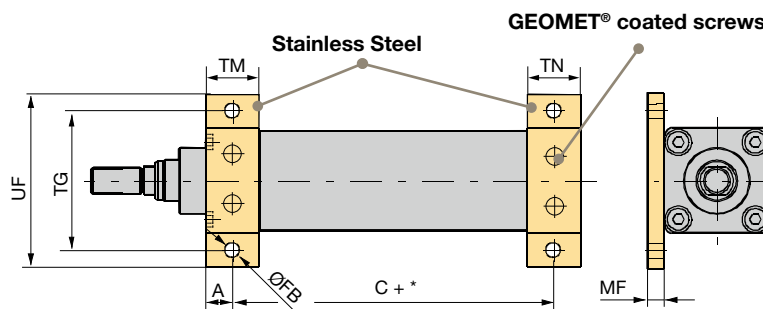

	Order no. (2 pieces)	TG	UF	ØFB	TM	MF	A	AB	TN	B	BB	BC
		[mm]										
ETH032	0112.917	62	78	6.6	25	8	12.5	-	25	-	-	-
ETH050	0122.917	84	104	9	30	10	15	-	30	-	-	-
ETH080	0132.917	120	144	13.5	40	12	20	-	40	-	-	-

ETH100 & ETH125

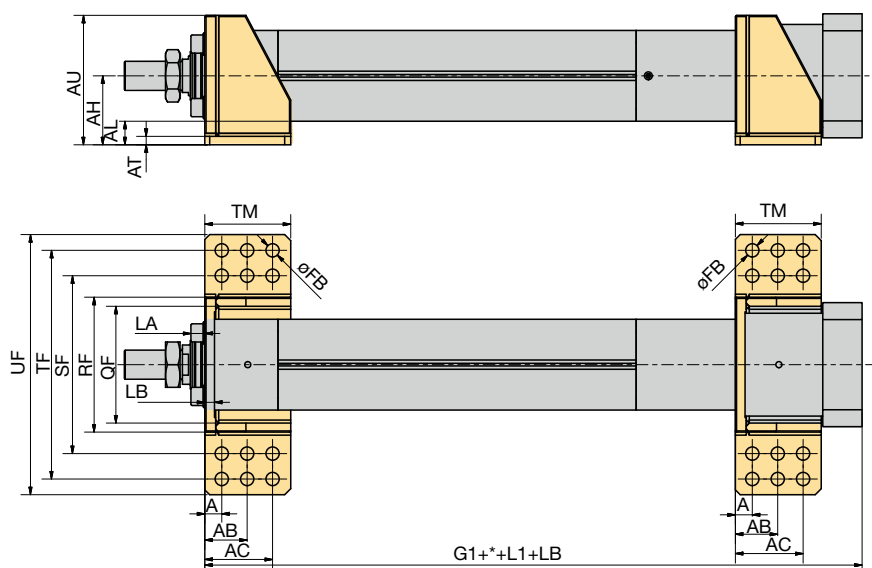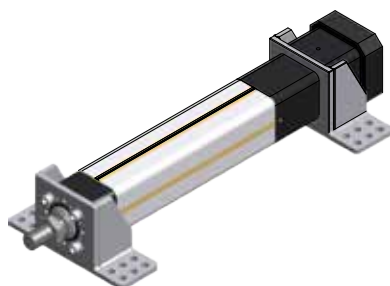

	Order no.	AU	AH	AL	AT	UF	TF	SF	RF	QF	LA	LB	ØFB	TM	A	AB	AC
		[mm]															
ETH100	- ¹⁾	164	94	34	14	290	-	246	200	170	19	13	17.5	99	16.5	49.5	81.5
ETH125	- ¹⁾	214	114	39	14	430	378	294	223	193	23	16	22	142	28	70	112

+* = Measure + Length of desired stroke ("Dimensions" see page 21).

Listed in the order code of the cylinder; the order number applies only for ordering spare parts (of ETH032-ETH080 only). Spare parts delivery is including screws for cylinder mounting.

Stainless components only available for ETH032-ETH080.

¹⁾ Subsequent conversion can only be made in our factory.



* For protection classes "B" and "C", we recommend GEOMET® coated screws (thin layer corrosion protection).

Cylinder Rod Version

External thread



Stainless Steel






External Thread (upon delivery)				
	Weight	A	KK	SW ¹⁾
	[kg]	[mm]	[mm]	[mm]
ETH032	0.06	22	M10x1.25	10
ETH050	0.15	32	M16x1.5	17
ETH080	0.48	40	M20x1.5	22
ETH100	2.4	70	M42x2	46
ETH125	3.7	96	M48x2	55

¹⁾ SW: Width across flat (position of the flat is not fixed)

Nut				
	Weight	M	L	K ¹⁾
	[kg]	[mm]	[mm]	[mm]
ETH032	0.01	M10x1.5	5	17
ETH050	0.02	M16x1.5	8	24
ETH080	0.04	M20x1.5	10	30
ETH100	0.27	M42x2	16	65
ETH125	0.60	M48x2	24	75

¹⁾ K: Width across flat
The nut is included in the delivery.



Internal Thread

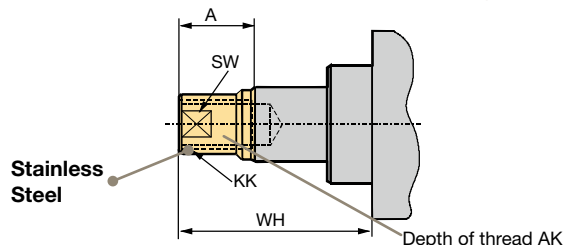

Internal Thread							
	Weight	A	KK (Option F)	KK (Option K)	AK	WH	SW ¹⁾
	[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	0.04	14	M10x1.25		20	32	12
ETH050	0.14	24	M16x1.5		25	50	20
ETH080	0.42	29	M20x1.5		35	59	26
ETH100	2.2	60	M42x2	M45x3	50	92	60
ETH125	4.3	90	M48x2	M45x3	60	123	70

¹⁾ SW: Width across flat (position of the flat is not fixed)


Rod Clevis

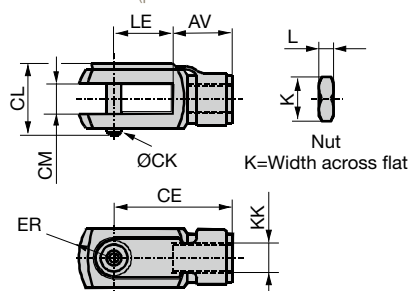

	Order no.		Weight	KK	CL	CM		LE	CE	AV	ER	ØCK (h11/E9)	K	L
	Standard	Stainless												
			[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	4309	P1S-4JRD	0.09	M10x1.25	26.0	10.2	+0.13 -0.05	20	40	20	14	10	17	5
ETH050	4312	P1S-4MRD	0.34	M16x1.5	39.0	16.2	+0.13 -0.05	32	64	32	22	16	24	8
ETH080	4314	P1S-4PRD	0.69	M20x1.5	52.5	20.1	+0.02 -0.0	40	80	40	30	20	30	10

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread. Available for ETH032-ETH080.

Spherical Rod Eye

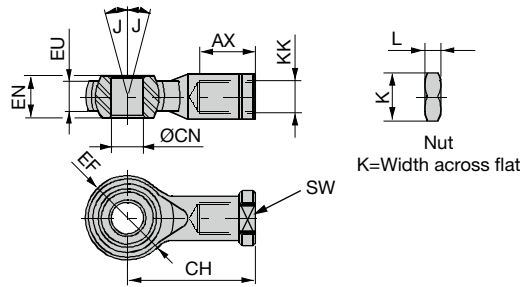


	Order no.		Weight	KK	SW ¹⁾	ØCN	EN	EU	AX	CH	ØEF	J	K	L
	Standard	Stainless												
			[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[°]	[mm]	[mm]
ETH032	4078-10	P1S-4JRT	0.07	M10x1.25	17	10 H9	14	10.5	20	43	28	13	17	5
ETH050	4078-16	P1S-4MRT	0.23	M16x1.5	22	16 H9	21	15.0	28	64	42	15	24	8
ETH080	4078-20	P1S-4PRT	0.41	M20x1.5	32	20 H9	25	18.0	33	77	50	14	30	10
ETH100	0142.920-01	0142.920-02	2.8	M42x2	60	40 H7	49	7	60	142	90	16	65	15
ETH125	0152.920-01	not available	5.0	M48x2	65	50 H7	60	45	65	160	116	14	75	24

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread.


¹⁾ SW: Width across flat (position of the flat is not fixed)

Alignment Coupler



For mounting at the extremity of the cylinder rod

- Balances misalignments
- Enlarges the mounting tolerance
- Simplifies the cylinder mounting
- Increases the service life of the cylinder guidings
- Compensates the offset between components and relieves the guiding from lateral force influences
- The traction/thrust force bearing capacity remains

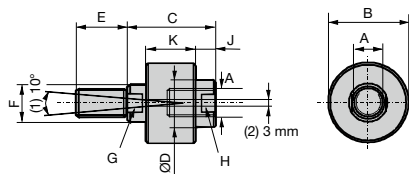

(1): Angle offset
(2): Axial offset
E: Hole dimension for depth


	Part No.	Weight	A	B	C	ØD	E	F	G	H	J	K
		[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
ETH032	LC32-1010	0.26	M10x1.25	40	51	19	19	16	13	16	13	26
ETH050	LC50-1616	0.64	M16x1.5	54	59	32	29	25	22	29	14	33
ETH080	LC80-2020	1.30	M20x1.5	54	59	32	29	25	22	29	14	33
ETH100	- ¹⁾	4.5	M39x2 ²⁾	101.6	111.1	57.2	57.2	44.5	38	49	22.2	69.9
ETH125	0152.921	9.0	M48x2	127	142.9	76.2	76.2	57.2	49.3	67	35	85.8

Listed in the order code of the cylinder; the order number applies only for ordering spare parts. Prerequisite is a cylinder rod with external thread. Only available in protection option A (IP54 with galvanized screws).

¹⁾ Subsequent conversion from rod end can only be made in our factory.

²⁾ Attention: Thread M39x2 differs from the standard (M42x2).

Outrigger Bearing

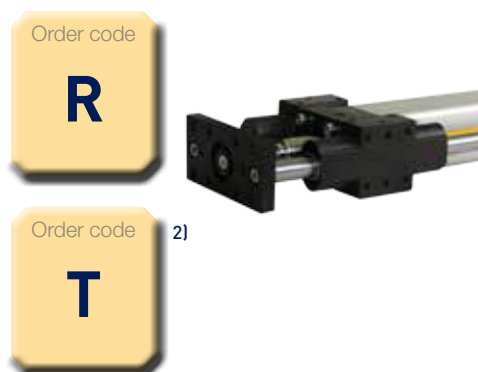

Function of outrigger bearing:

- Additional stability and precision
- Anti-rotation device for higher torques
- Absorption of lateral forces

Versions

Option R:

Outrigger bearing with ball bushings

(available only in protection class option A, "Order Code" see page 54)

- Main casting extruded aluminum
- 2 hardened steel guiding rods, surface hard-chrome plated
- Linear ball bearings

Option T: ²⁾

Outrigger bearing with slide bushings

(for all protection options, standard with options B & C, "Order Code" see page 54)

- Main casting extruded aluminum
- 2 guiding rods stainless steel
- Sliding guides

When sizing the drive train of an ETH electro cylinder with outrigger bearing and sliding bushings, increased friction losses in the sliding bushings must be taken into consideration

Note:


¹⁾ xxxx corresponds to the customized stroke. For information about this value please contact Parker.

+* = Measure + Length of desired stroke
("Dimensions" see page 21).

available for ETH032-ETH080.

For the ETH080, the standard pneumatic outrigger bearing modules cannot be used.

²⁾ not for ATEX

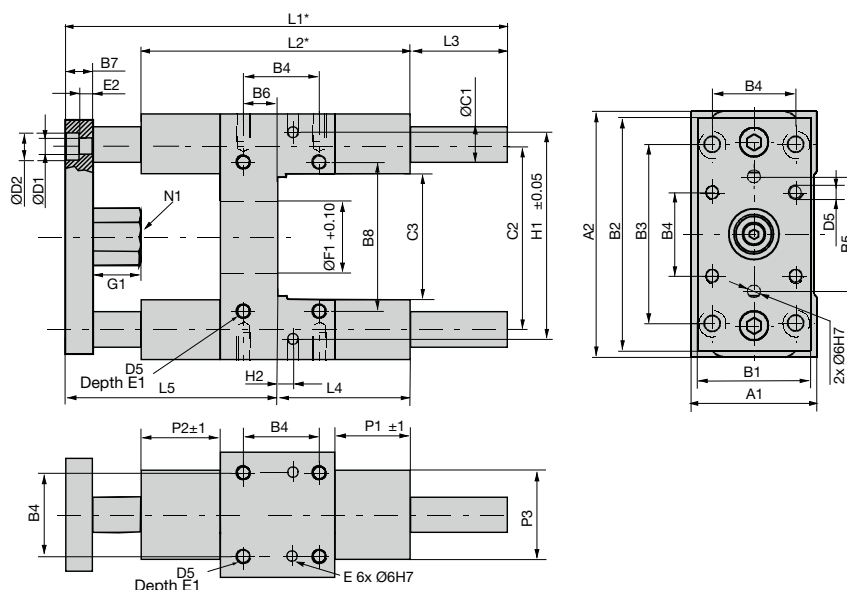


	Unit	ETH032	ETH050	ETH080
Part-No. - Option R ¹⁾		0112.040-xxxx	0122.040-xxxx	0132.040-xxxx
Part-No. - Option T ¹⁾		0112.041-xxxx	0122.041-xxxx	0132.041-xxxx
A1	[mm]	50	70	105
A2	[mm]	97	137	189
B1	[mm]	45	63	100
B2	[mm]	90	130	180
B3	[mm]	78	100	130
B4	[mm]	32.5	46.5	72
B5	[mm]	50	72	106
B6	[mm]	4	19	21
B7	[mm]	12	15	20
B8	[mm]	61	85	130
OC1	[mm]	12	20	25
C2	[mm]	73.5	103.5	147
C3	[mm]	50	70	105
ØD1	[mm]	6.6	9	11
ØD2	[mm]	11	14	17
D5	[mm]	M6	M8	M10
E (Depth)	[mm]	10	10	10
E1 (Depth)	[mm]	12	16	20
E2 (Depth)	[mm]	7	9	11
ØF1	[mm]	30	40	60
G1	[mm]	17	27	32
H1	[mm]	81	119	166
H2	[mm]	11.7	4.2	15
L1+*	[mm]	150	192	247
L2	[mm]	120	150	200
L3+*	[mm]	15	24	24
L4	[mm]	71	79	113
L5	[mm]	64	89	110
N1	[mm]	17	24	30
P1	[mm]	36	42	50
P2	[mm]	31	44	52
P3	[mm]	40	50	70
Total mass with zero stroke	[kg]	0.97	2.56	6.53
Moving mass zero stroke	[kg]	0.60	1.84	4.36
Additional mass	[kg/m]	1.78	4.93	7.71


Permitted load / lifetime / deformation of the parallel guiding

Outrigger bearing with ball bushings (Option R)

ETH032

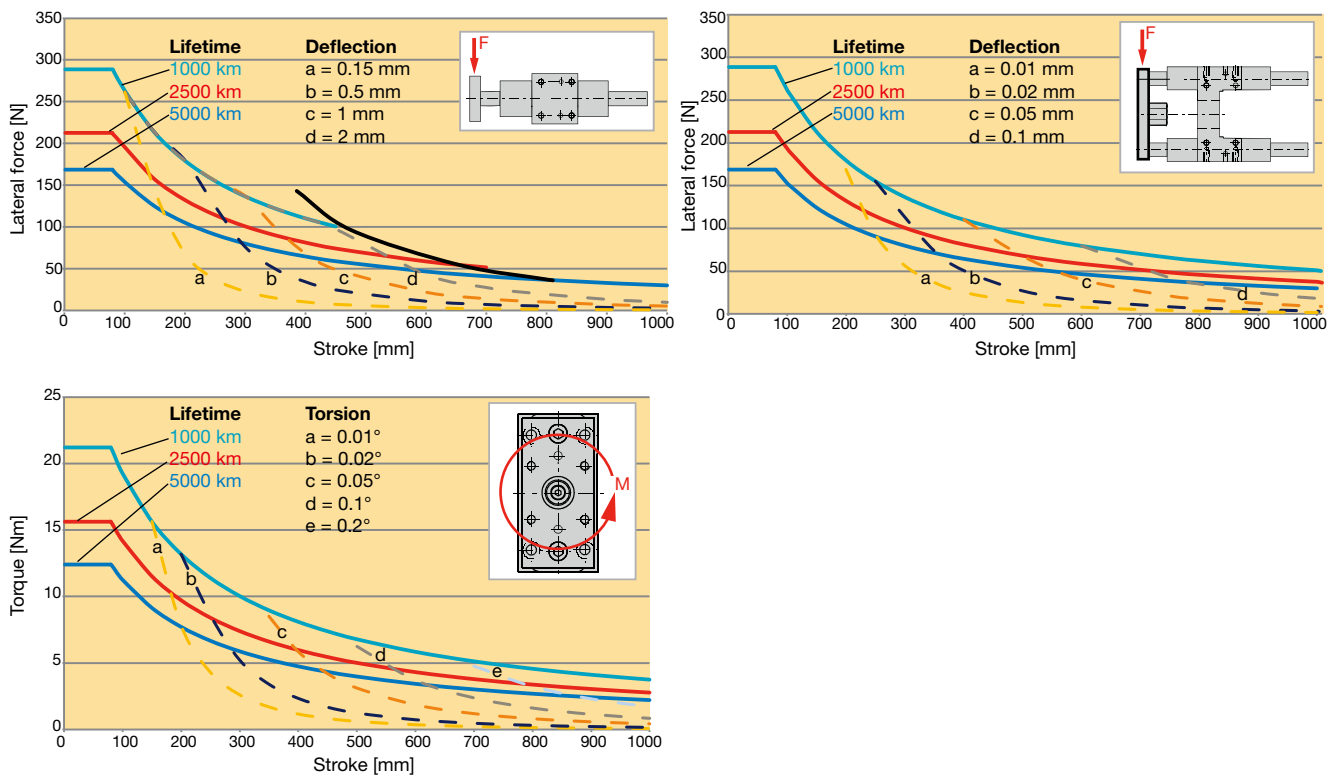




ETH050

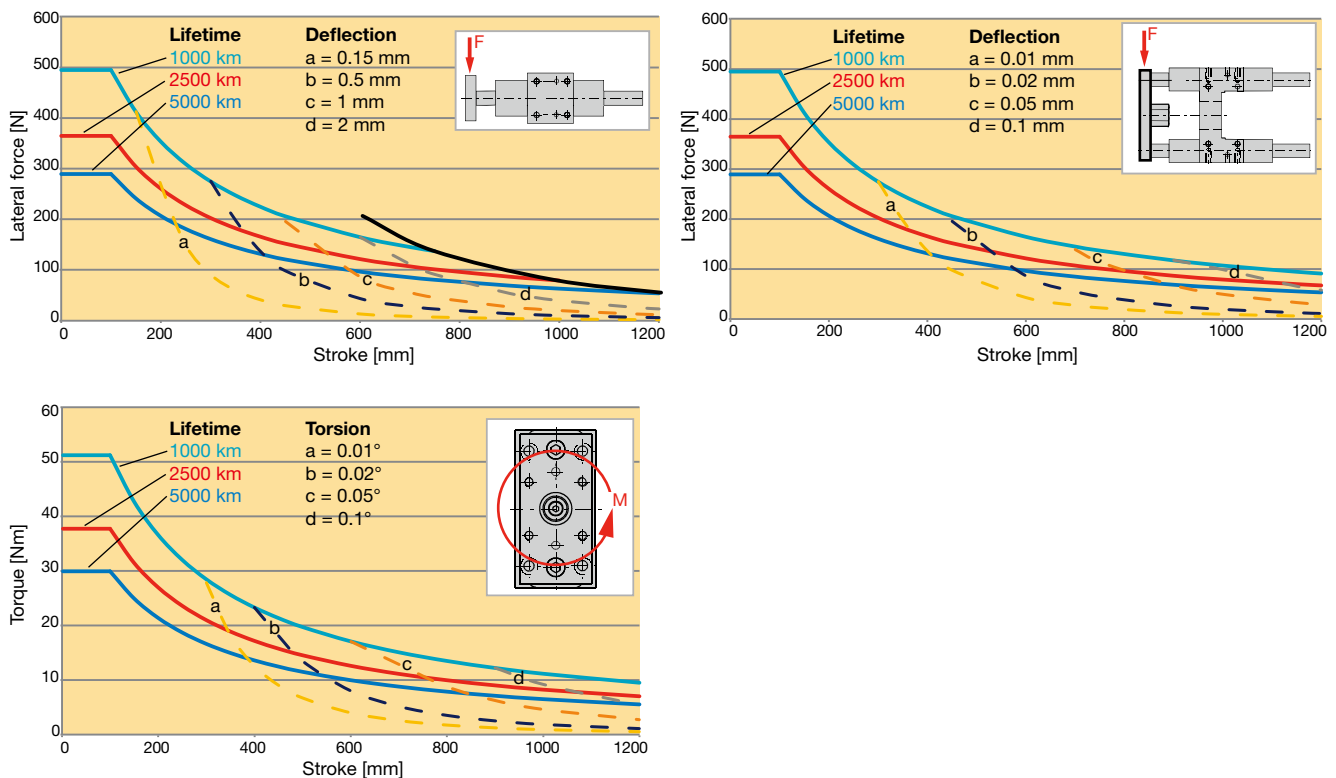

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.




Outrigger bearing with ball bushings (Option R)

ETH080

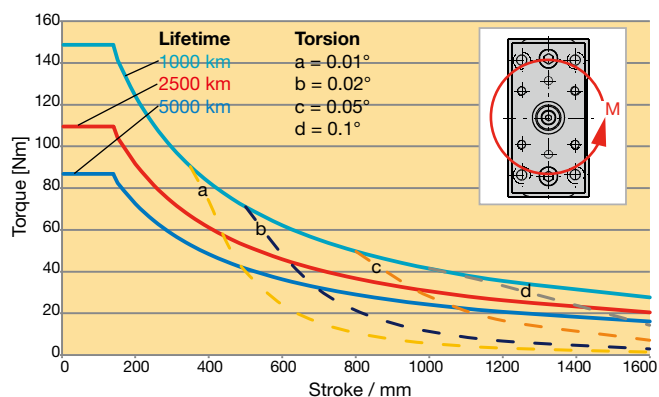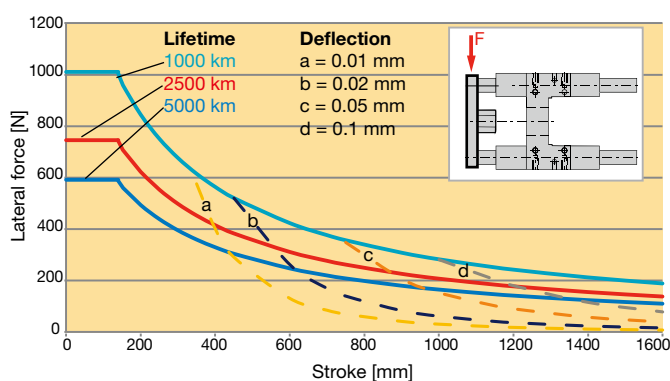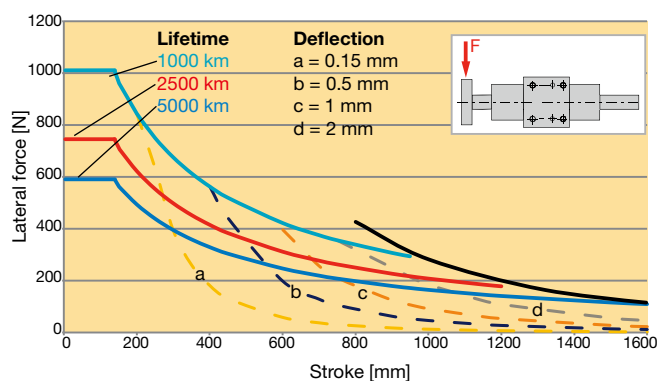

Outrigger Bearing with sliding guide (option T)




ETH032

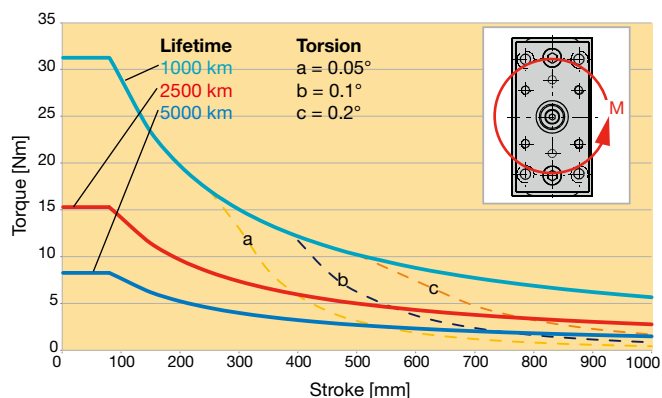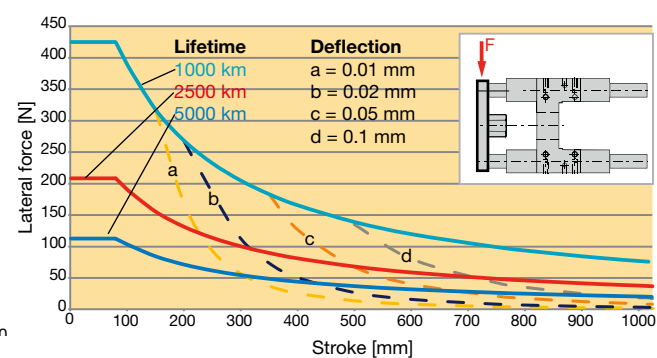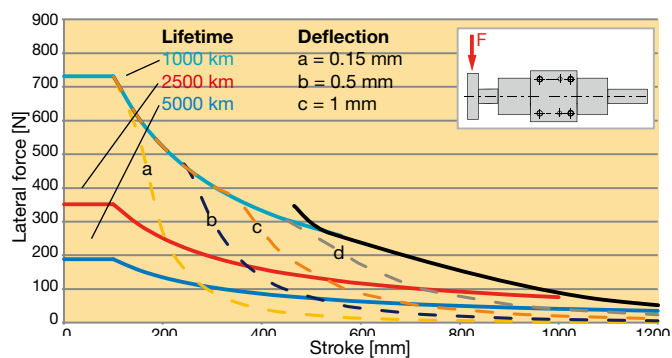




The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.

Outrigger Bearing with sliding guide (option T)

ETH050

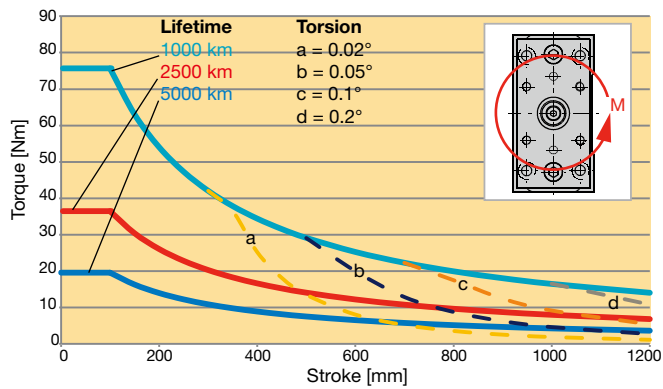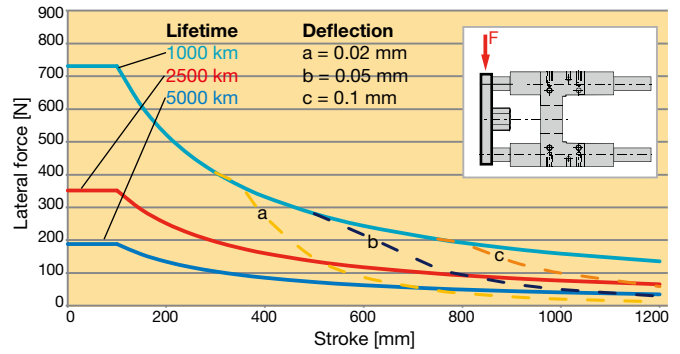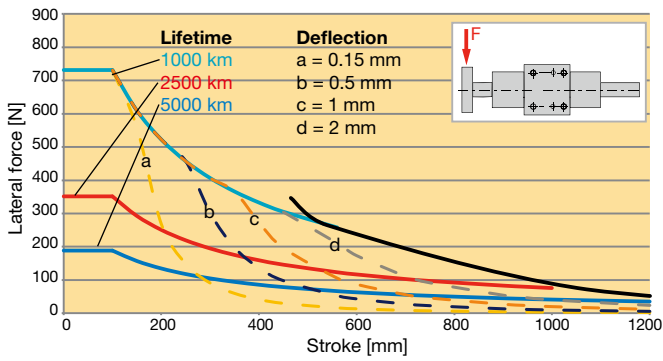

ETH080

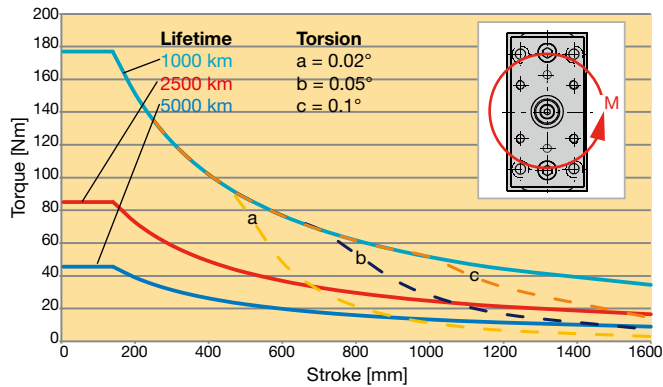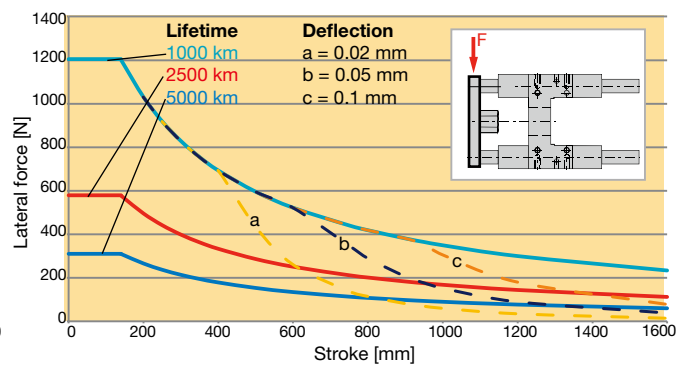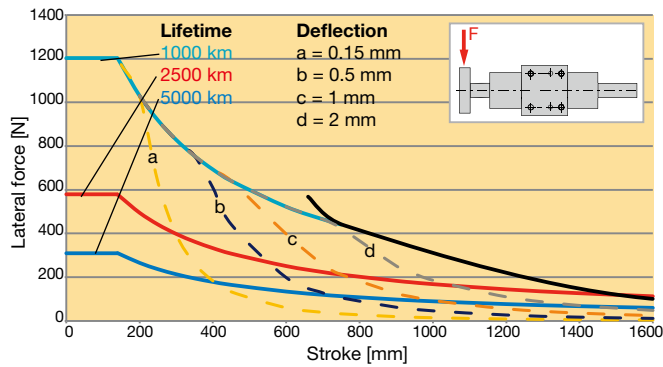

The diagrams apply for a medium travel speed of 0.5 m/s, an ambient temperature of 20 °C.

Accessories


Force sensors¹⁾ - Joint head with integrated force sensor with optional joint head

Swivel heads are important construction components with respect to rotary, pivoting and tilting movements. Force measurements are more and more frequently required in those applications.

The force transducers are suitable for direct mounting on the cylinder rod.

They can, for example, be used to measure contact forces or overloads. Thanks to the thin film technology, the swivel head force transducers are very robust and long time stable. An integrated amplifier emits an output signal of 4...20 mA.

The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC) and are sized to pick up traction/thrust forces.

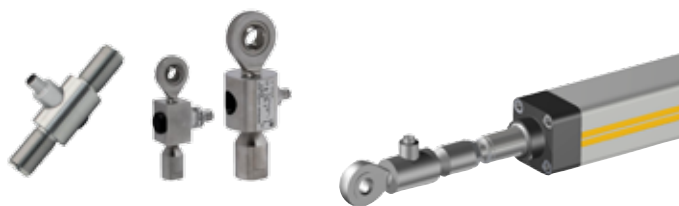

Features

- Measuring range: Traction/thrust forces up to ± 114 kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- High long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting

Connection of the force sensors to Compax3 with Option M21 is possible.

Technical Features

	Unit	Joint head with integrated force sensor									With External Thread		
		ETH032			ETH050			ETH080			ETH100	ETH125	
		M05	M10	M16	M05	M10	M20	M05	M10	M32	M10/M20	M10	M20
Accuracy	[%]	0.2									1		
Material	-	Stainless steel									Stainless steel		
Protection class	-	IP67									IP67		
Measuring range	[kN]	± 3.7	± 3.7	± 2.4	± 9.3	± 7.0	± 4.4	± 17.8	± 25.1	± 10.6	± 56.0	± 88.7	± 114.0
Accuracy	[N]	14.8	14.8	9.6	37.2	28.0	17.6	71.2	100.4	42.4	1120	1774	2280
Part No.	-	0111.916			0111.917			0121.916			0121.917	0131.916	0131.917

For ETH032-ETH080: Only possible with cylinder rod end "M" (external thread).



For ETH100, ETH125: Only possible with cylinder rod end "K".

A subsequent conversion from another rod end to M or K is generally **NOT** possible.

Electrical connection

Power supply $U_B = 10...30$ VDC

Analog output 4...20 mA (two-wire technology)

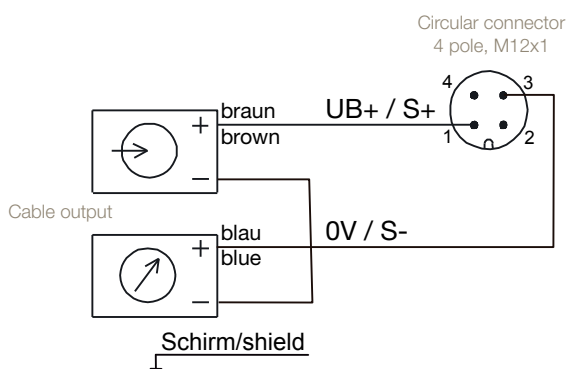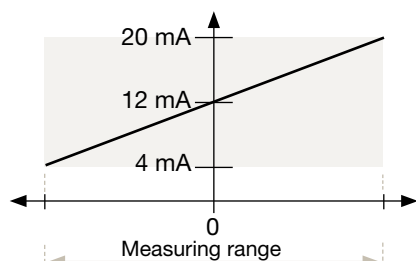


Part No.	Cable for force sensor
080-900446	Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m
080-900447	Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m
080-900456	Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m
080-900457	Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m


¹⁾ATEX on request

Dimensions [mm]

Version for ETH032

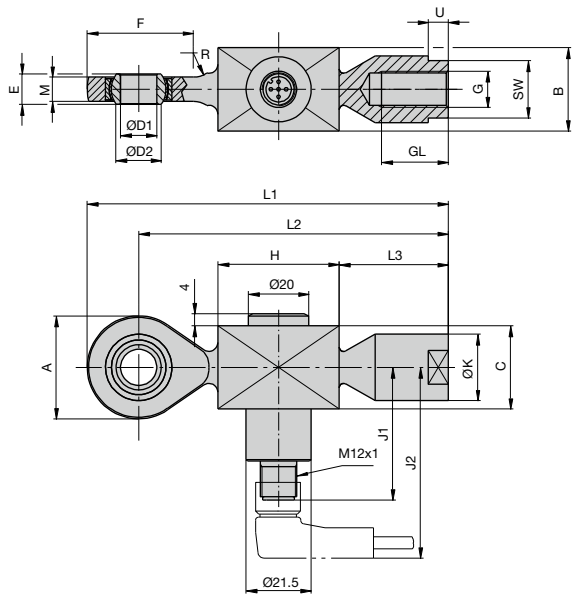

Version for ETH050 & ETH080

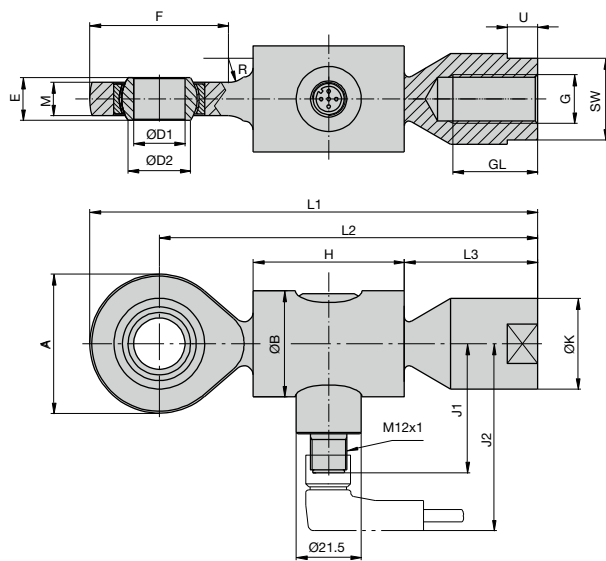


Dimensions [mm]

Dimensions

	A	B	ØB	C	ØD1	ØD2 0.008	E	F	G	GL	H	J1	J2	ØK	L1	L2	L3	M	SW ¹⁾	U
for ETH032	34	27	-	27	12	15	10	35	M10x1.25	21	40	44	63	22	119	102	36	8	19	8
for ETH050	46	-	35	-	17	20.7	14	46	M16x1.5	28	50	43	62	30	148	125	44	11	27	12
for ETH080	53	-	54	-	20	24.2	16	54	M20x1.5	33	54	44	63	35	171	144.5	54	13	32	13

¹⁾ SW: Width across flat

Version for ETH100 & ETH125

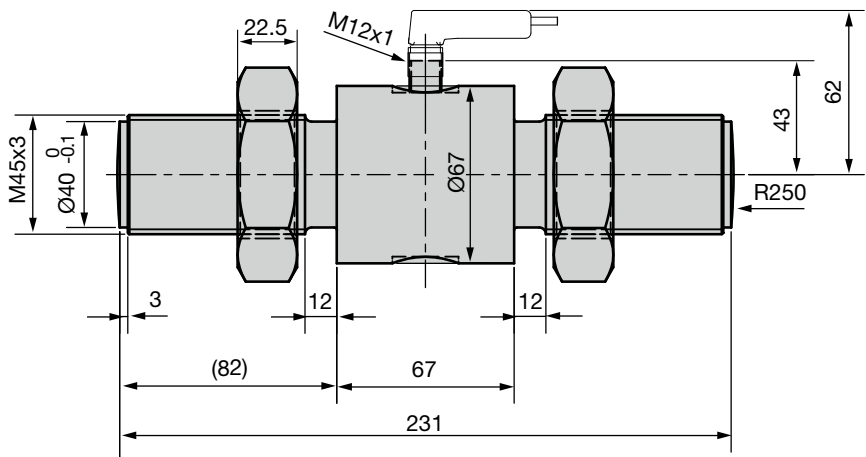


Force sensors¹⁾ - Rear clevis with force sensor

In some force measurement applications, a force sensor on the cylinder rod is not possible or will affect the application's scope. For this case, we developed a special variant of the ETH cylinder, where the force sensor is integrated into the rear end of the cylinder. The advantage is that the sensor cable does not move with the rod.

All force sensors are configured as traction/thrust sensors.

Analog standard output signals 4...20 mA are available. The sensors correspond to the EN 61326 standard for electromagnetic compatibility (EMC).

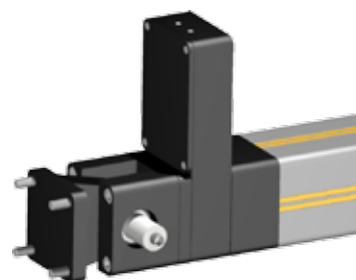

Features

- Measuring range: Traction/thrust forces up to ± 81.4 kN
- Thin film implants (instead of conventional bonded foil strain gauges)
- Corrosion resistant stainless steel version
- Integrated amplifier
- Small temperature drift
- High long term stability
- High shock and vibration resistance
- For dynamic or static measurements
- Good repeatability
- Simple mounting

Connection of the force sensors to Compax3 with Option M21 is possible.

Technical Features



Rear clevis with force sensor for ETH...												
	Unit	ETH032			ETH050			ETH080			ETH100	ETH125
		M05	M10	M16	M05	M10	M20	M05	M10	M32	M10/M20	M10/M20
Accuracy	[%]	1										2
Material	-	Stainless steel										Stainless steel
Protection class	-	IP67										IP67
Measuring range	[kN]	± 3.7	± 3.7	± 2.4	± 9.3	± 7.0	± 4.4	± 17.8	± 25.1	± 10.6	± 54.8	± 81.4
Accuracy	[N]	74.0	74.0	48.0	186.0	140.0	88.0	356.0	502.0	212.0	2192	3256
Part No.	-	0112.034-01		0112.034-02	0122.034-01	0122.034-02	0122.034-03	0132.034-01	0132.034-02	0132.034-03	0142.034-01	0152.034-01

Only for parallel configuration and cylinders with "F" mounting option (mounting thread on the cylinder body)

Electrical connection

Power supply $U_B = 10...30$ VDC


Analog output 4...20 mA (two-wire technology)

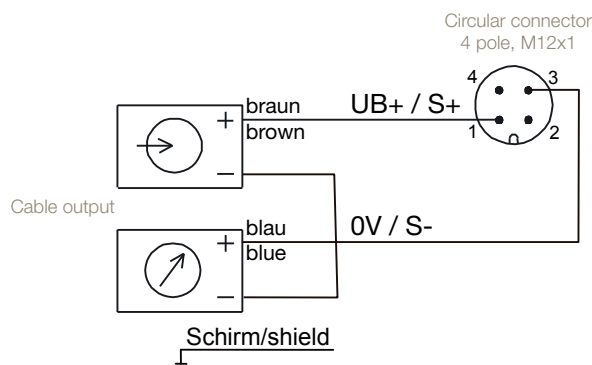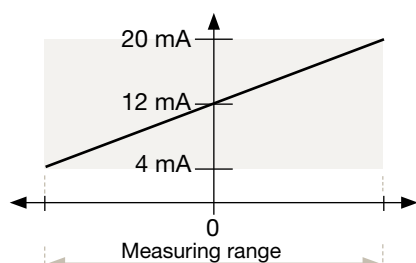

Part No.	Cable for force sensor
080-900446	Force sensor cable (PUR), straight connector, M12 with flying leads, 2 m
080-900447	Force sensor cable (PUR), straight connector, M12 with flying leads, 5 m
080-900456	Force sensor cable (PUR), angle connector, M12 with flying leads, 2 m
080-900457	Force sensor cable (PUR), angle connector, M12 with flying leads, 5 m

¹⁾ATEX on request

Version with fixing flange for ETH cylinder

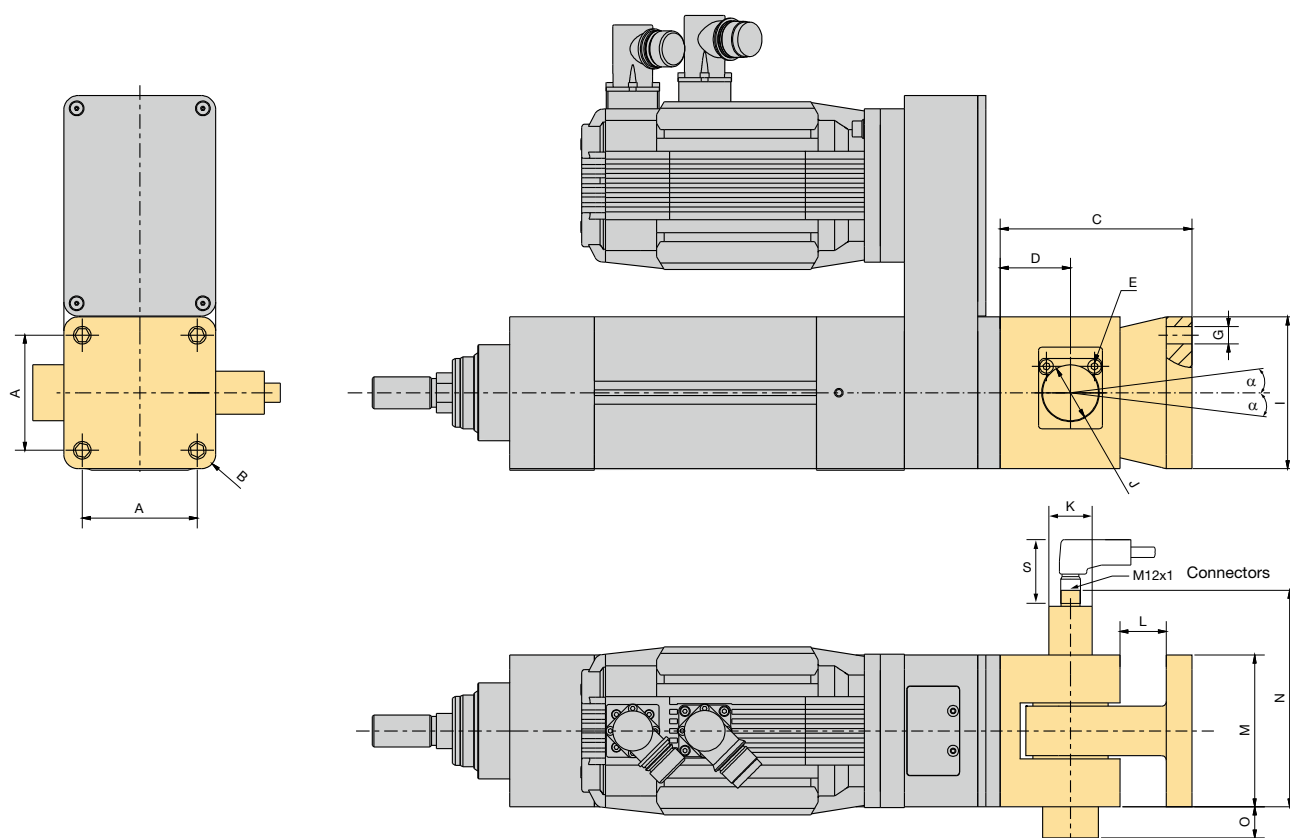

Dimensions

Dimensions [mm]

	A	B	C	D	E ¹⁾	G	I	ØJ	ØK	L	M	N	O	S	α
for ETH032	32.5	R7	72	27	SW3	6.6	46.5	20	27	12	46.5	98.25	6.75	19	±3.5°
for ETH050	46.5	R8.5	89	32	SW3	9	63.5	25	27	17	63.5	111.75	3.25	19	±4°
for ETH080	72	R9	123	47	SW4	11	95	35	27	29	95	135.5	0	19	±4°
for ETH100	89	R12.5	166	70	SW6	17	120	50	27	30	120	160.8	4.2	19	±4°
for ETH125	105	R20	196	75	SW6	22	150	50	27	40	150	175.8	0	19	±4°

¹⁾ SW: Width across flat

α: max. permissible deflection angle with reference to center axis

Please respect the notes in the ETH Manual (19x-550002) on the permissible screws and tightening torques.

Initiators / Limit Switches ¹⁾

Sensors




The position sensors can be mounted in the longitudinal grooves of the cylinder body and are directly immersible in the profile; projecting edges are thus avoided. The initiator cable is hidden under the yellow cover.

The permanent magnet integrated into the screw nut actuates the initiators. Fitting sensors available as accessories.



ETH032, ETH050 2 grooves each on 2 opposite sides.
ETH080, ETH100 2 grooves each on all sides.

The following initiator types are available for the ETH cylinder series:

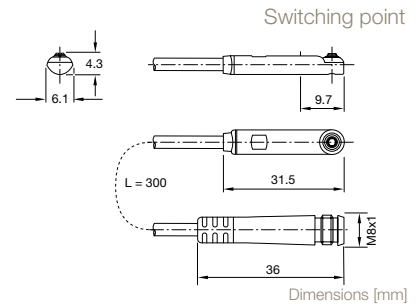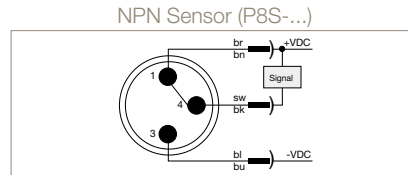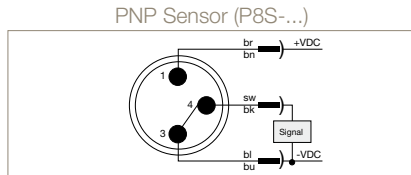


Info: Do only use PNP types for ETH with Compax3.


Magnetic cylinder sensors

Type	Function	LED	Logic	Cable	Continuous current	Current consumption	Supply voltage	Switching frequency	compatible with Compax3, SLVD-N, TPD-M
P8S-GPFLX	N.O.	yes	PNP	3 m	max. 100 mA	max. 10 mA	10-30 VDC	1 kHz	yes
P8S-GNFLX			NPN						No
P8S-GPSHX			PNP	0.3 m cable with M8 connector					yes
P8S-GNSHX			NPN						No
P8S-GQFLX	N.C.		PNP	3 m					yes
P8S-GMFLX			NPN						No
P8S-GQSHX			PNP	0.3 m cable with M8 connector					yes
P8S-GMSHX			NPN						No


ETH with Compax3, P-Series

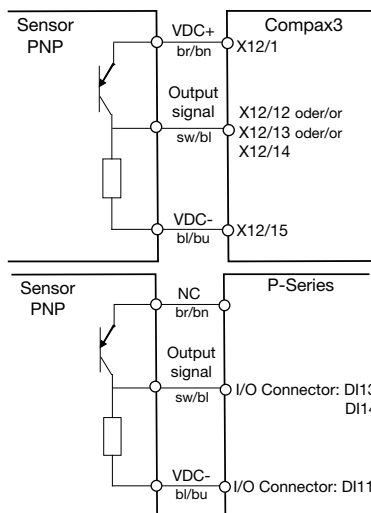

Variant 1: X12 Input - direct



Variant 2: X12 Input - via digital I/Os

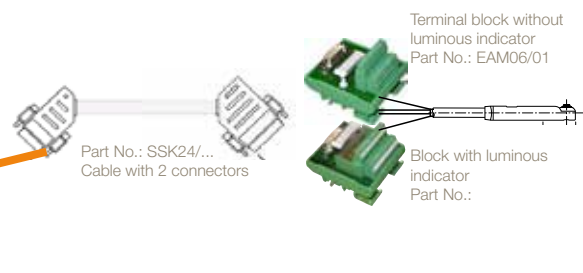

¹⁾ATEX on request

Drive Train Selection ¹⁾

Example for Sizing with Predefined Drive Trains

In order to simplify the dimensioning process for a complete drive train, We have prepared an overview of predefined electro cylinders, gearboxes, motors and servo drives, which can be found on the following pages.

With a few parameters, you can directly find the order code for the required components.

Note the boundary conditions!

The following application parameters are required:

- The equivalent axial force.
(Calculation page 13 formula 3 with the forces determined as described on page 11).
- The maximum speed.

Working with the drive train table

- Select the drive trains providing the required axial force (e.g. by drawing a vertical line).
- Then select from this choice the drive trains, that are able to travel at the required speed (e.g. by drawing a second vertical line).
- The suitable drive train can then be selected from the remaining choice, if necessary by comparing additional characteristics.

Please check if all given characteristics (such as max. acceleration, supply voltage etc.) are suitable for your application.

Example:

Required data

Equivalent axial force: 5000 N
Speed: 300 mm/s



¹⁾ does not apply for ATEX Cylinder

Predefined Motion Packages ETH032 ¹⁾


with Compax3, SLVD-N, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

¹⁾ does not apply for ATEX Cylinder

Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

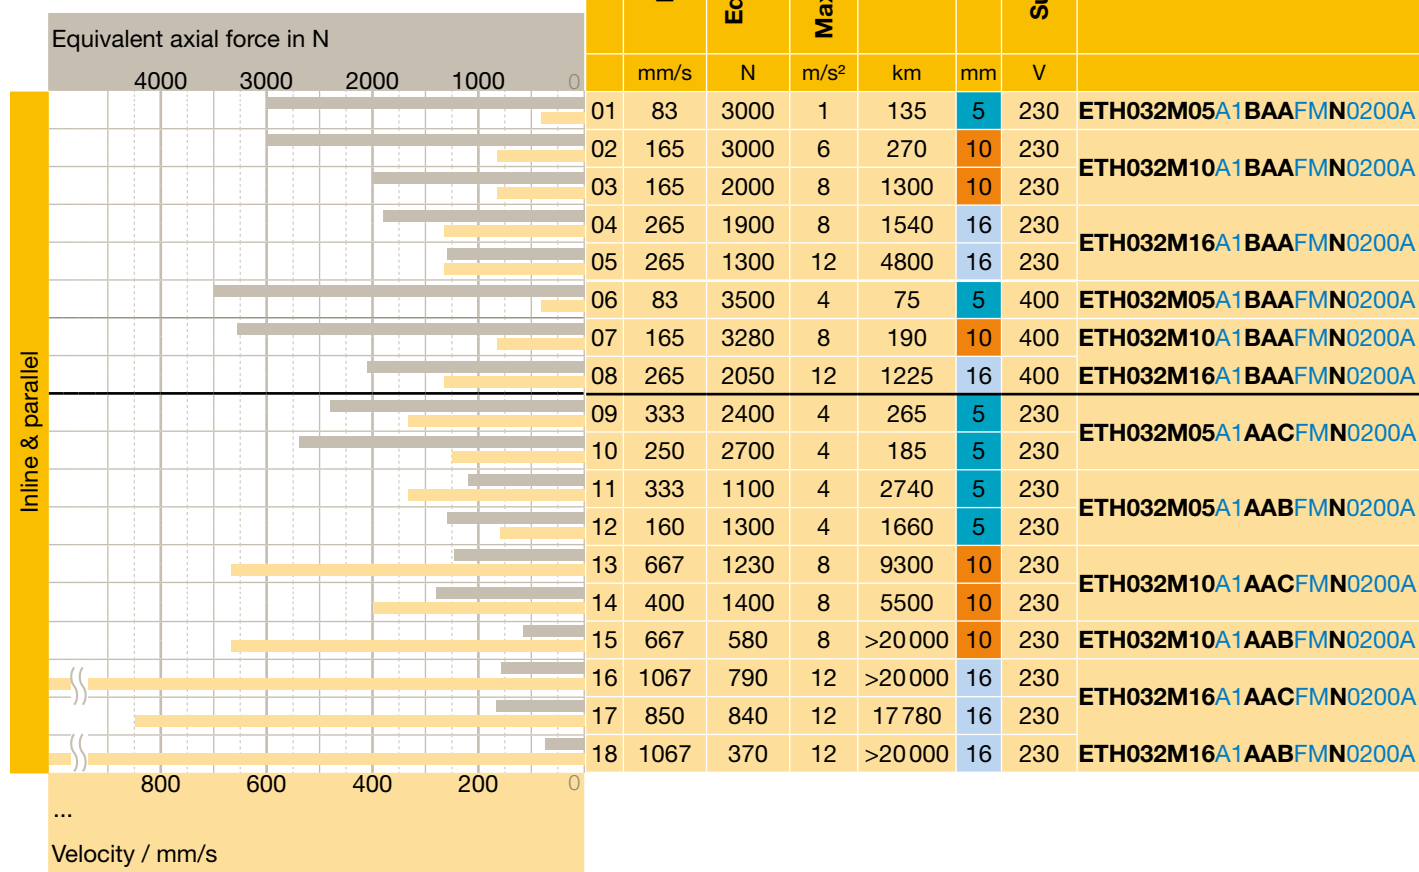

Basic Application Assumptions:

- Stroke from 50 to 400 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
 - with parallel motor: respect transmissible torque depending on the motor speed n
 - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes							
	Gearbox	Motor	Drive Compax3	Motor Cable Feedback cable		Drive SLVD-N / TPD-M	Motor Cable Feedback cable
	PS60-003-S2/MU60-001	SMH60601,45112I65G44	C3S025V2F 11IxxTxxMxx	MOK55/... (standard) or MOK54/... (cable chain compatible) GBK 24/... (cable chain compatible)		SLVD2N...	CAVOMOT... CAVORES...
	PS60-003-S2/MU60-321	SMH8260038142I65A74	C3S025V2F 11IxxTxxMxx			SLVD2N...	
	PS60-003-S2/MU60-001	SMH60601,45112I65G44	C3S015V4F 11IxxTxxMxx			TPDM020202....	
	PS60-003-S2/MU60-321	SMH8260038142I65A74	C3S038V4F 11IxxTxxMxx			TPDM05...	
without gearbox		SMH8245038142I65A72	C3S063V2F 11IxxTxxMxx			SLVD5N...	
		SMH8260038142I65A74					
		SMH60451,45112I65G42	C3S025V2F 11IxxTxxMxx			SLVD2N...	
		SMH8245038142I65A72	C3S063V2F 11IxxTxxMxx			SLVD5N...	
		SMH8260038142I65A74	C3S025V2F 11IxxTxxMxx			SLVD2N...	
		SMH60451,45112I65G42	C3S025V2F 11IxxTxxMxx			SLVD2N...	
		SMH8245038142I65A72	C3S063V2F 11IxxTxxMxx			SLVD5N...	
		SMH8260038142I65A74	C3S025V2F 11IxxTxxMxx			SLVD2N...	

Order codes:

bold: mandatory so that the package is combinable

italics: recommended/standard

blue: must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

Predefined Motion Packages ETH050 ¹⁾


with Compax3, SLVD-N, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

¹⁾ does not apply for ATEX Cylinder

Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

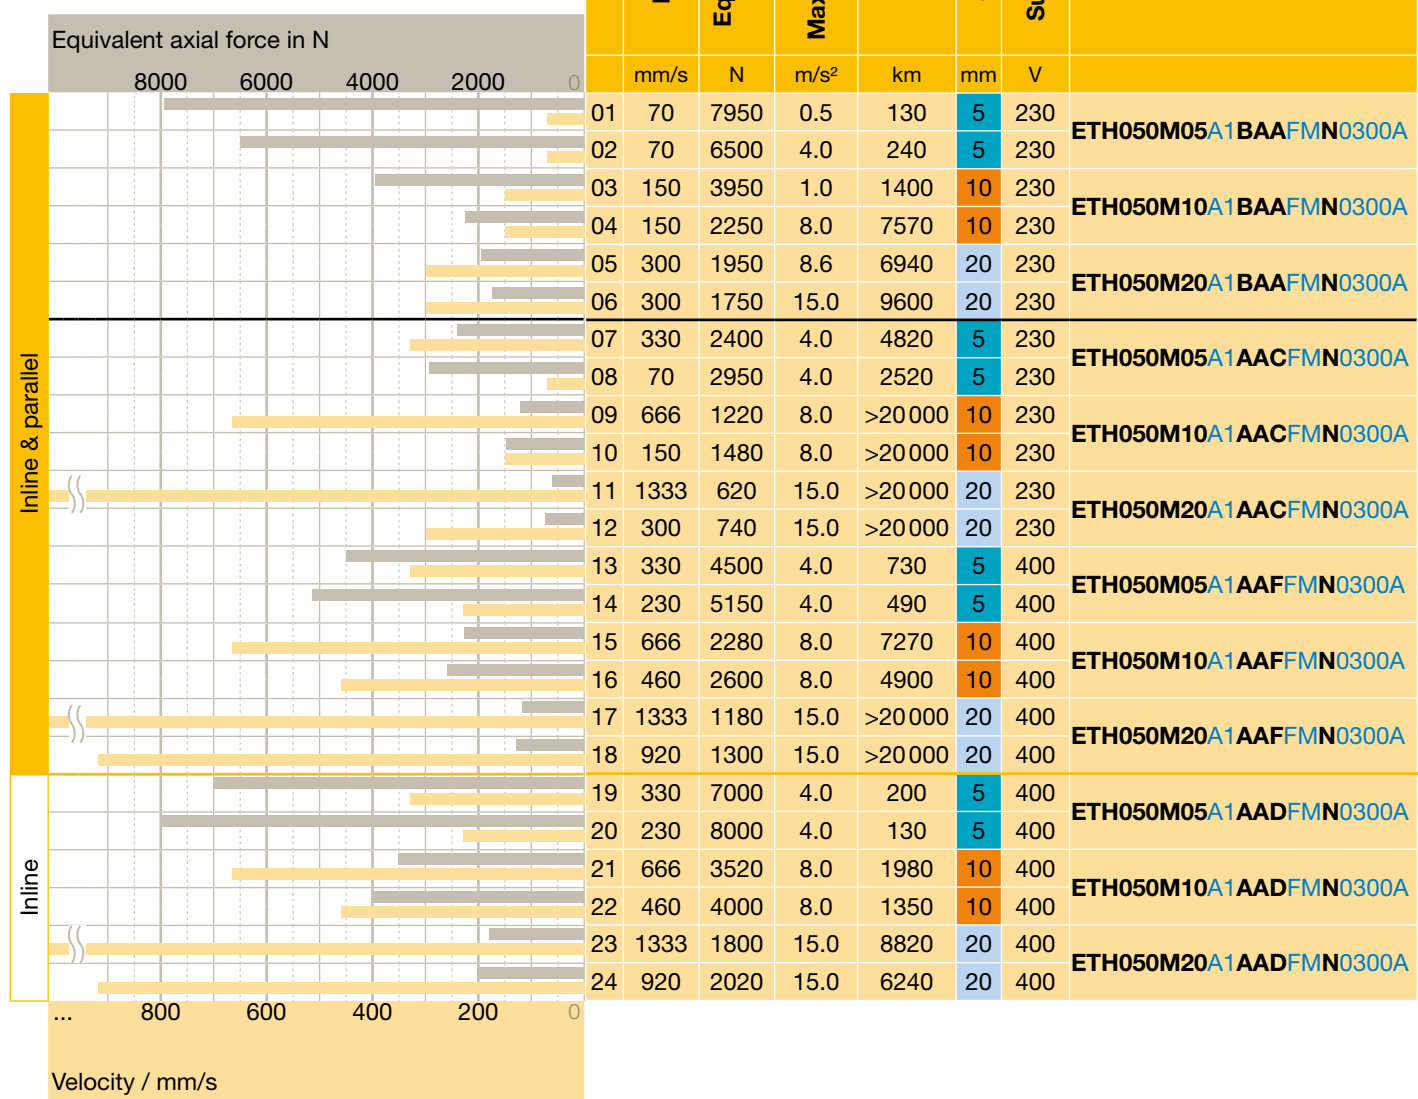

Basic Application Assumptions:

- Stroke from 50 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
 - with parallel motor: respect transmissible torque depending on the motor speed n
 - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes									
	Gearbox	Motor	Drive Compax3	Motor Cable	Feedback cable	Drive SLVD-N / TPD-M	Motor Cable	Feedback cable	
PS60-003-S2/MU60-321		SMH8256038142I65A74	C3S063V2F 11IxxTxxMxx	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	SLVD5N...	CAVOMOT...	CAVORES...	
			C3S025V2F 11IxxTxxMxx			SLVD2N...			
			C3S063V2F 11IxxTxxMxx			SLVD5N...			
			C3S025V2F 11IxxTxxMxx			SLVD2N...			
			C3S063V2F 11IxxTxxMxx			SLVD5N...			
			C3S025V2F 11IxxTxxMxx			SLVD2N...			
without gearbox		SMH8245038142I65A72	C3S063V2F 11IxxTxxMxx	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	SLVD5N...	CAVOMOT...	CAVORES...	
		SMH8210038142I65A72	C3S025V2F 11IxxTxxMxx			SLVD2N...			
		SMH8245038142I65A72	C3S063V2F 11IxxTxxMxx			SLVD5N...			
		SMH8210038142I65A72	C3S025V2F 11IxxTxxMxx			SLVD2N...			
		SMH8245038142I65A72	C3S063V2F 11IxxTxxMxx			SLVD5N...			
		SMH8210038142I65A72	C3S025V2F 11IxxTxxMxx			SLVD2N...			
		SMH10056065ET 2I65A74	C3S075V4F 11IxxTxxMxx			TPDM05...			
		SMH10030065ET 2I65A74	C3S038V4F 11IxxTxxMxx			TPDM05...			
		SMH10056065ET 2I65A74	C3S075V4F 11IxxTxxMxx			TPDM05...			
		SMH10030065ET 2I65A74	C3S038V4F 11IxxTxxMxx			TPDM05...			
		SMH10056065ET 2I65A74	C3S075V4F 11IxxTxxMxx			TPDM05...			
		SMH10030065ET 2I65A74	C3S038V4F 11IxxTxxMxx			TPDM05...			
without gearbox		MH10560089192I65A74	C3S150V4F 11IxxTxxMxx	MOK55/... (standard) or MOK54/... (cable chain compatible)	GBK 24/... (cable chain compatible)	TPDM10...	CAVOMOT...	CAVORES...	
		MH10530089192I65A74	C3S075V4F 11IxxTxxMxx			TPDM05...			
		MH10560089192I65A74	C3S150V4F 11IxxTxxMxx			TPDM10...			
		MH10530089192I65A74	C3S075V4F 11IxxTxxMxx			TPDM05...			
		MH10560089192I65A74	C3S150V4F 11IxxTxxMxx			TPDM10...			
		MH10530089192I65A74	C3S075V4F 11IxxTxxMxx			TPDM05...			

Order codes:

bold: mandatory so that the package is combinable

italics: recommended/standard

blue: must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

Predefined Motion Packages ETH080 ¹⁾


with Compax3, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

¹⁾ does not apply for ATEX Cylinder

Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

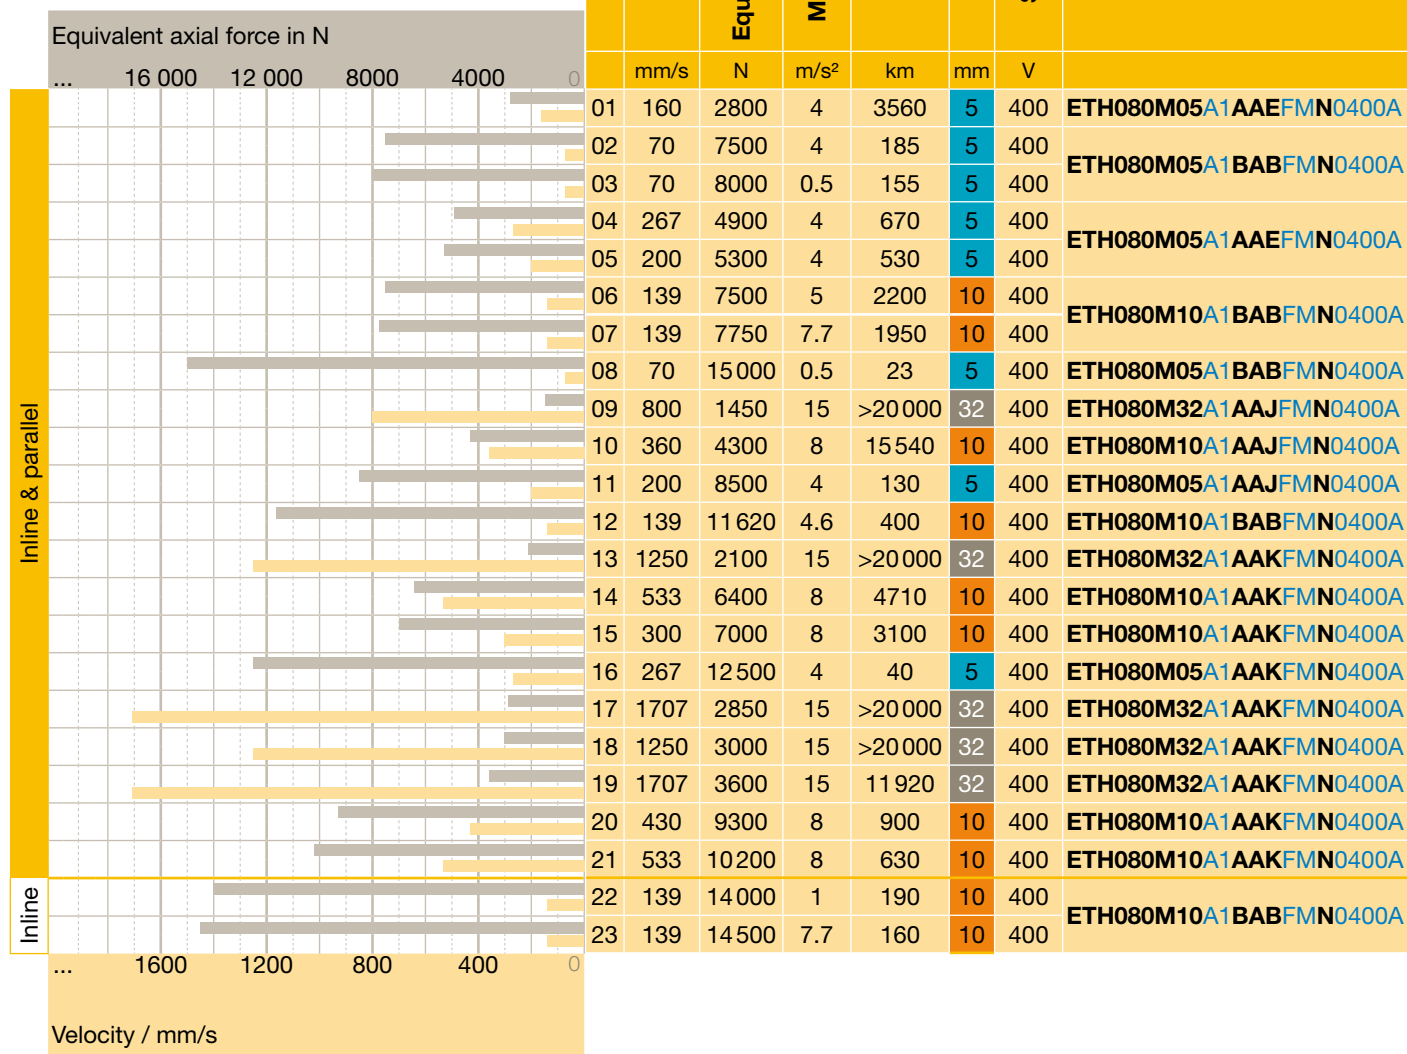

Basic Application Assumptions:

- Stroke from 50 to 800 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
 - with parallel motor: respect transmissible torque depending on the motor speed n
 - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox
- 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes							
	Gearbox	Motor	Drive Compax3	Motor Cable	Feedback cable	Drive TPD-M	Motor cable Feedback cable
	without gearbox	SMH8230035192I65A74	C3S038V4F 1I1xxTxxMxx	①	GBK 24/... (cable chain compatible)	TPDM05...	CAVOMOT... CAVORES...
	PS90-003-S2/MU90-085	SMH8256038192I65A74	C3S038V4F 1I1xxTxxMxx			TPDM05...	
		SMH8230038192I65A74	C3S038V4F 1I1xxTxxMxx			TPDM020202...	
		without gearbox	SMH10056065192I65A74			C3S075V4F 1I1xxTxxMxx	
	PS90-003-S2/MU90-088	SMH10030065192I65A74	C3S038V4F 1I1xxTxxMxx			TPDM05...	
		SMH10030065192I65A74	C3S038V4F 1I1xxTxxMxx			TPDM05...	
		SMH10056065192I65A74	C3S075V4F 1I1xxTxxMxx			TPDM0808...	
		SMH10030065192I65A74	C3S038V4F 1I1xxTxxMxx			TPDM05...	
	without gearbox	SMH11530107242I65A74	C3S075V4F 1I1xxTxxMxx			TPDM0808...	
			C3S075V4F 1I1xxTxxMxx			TPDM0808...	
			C3S075V4F 1I1xxTxxMxx	TPDM0808...			
	PS90-003-S2/MU90-345	SMH11530108192I65A74	C3S075V4F 1I1xxTxxMxx	TPDM0808...			
		without gearbox	SMH14230155242I65A74	C3S150V4F 1I1xxTxxMxx		TPDM10...	
			SMH14256155242I65A74	C3S150V4F 1I1xxTxxMxx		TPDM15...	
			SMH14230155242I65A74	C3S150V4F 1I1xxTxxMxx		TPDM10...	
			SMH14256155242I65A74	C3S150V4F 1I1xxTxxMxx		TPDM15...	
			MH14545225243I65A74	C3S300V4F 1I1xxTxxMxx		TPDM30...	
			MH14530225243I65A74	C3S150V4F 1I1xxTxxMxx		TPDM10...	
			MH14545285243I65A74	C3S300V4F 1I1xxTxxMxx		TPDM30...	
			MH14530225242I65A74	C3S150V4F 1I1xxTxxMxx		TPDM15...	
MH14545285243I65A74			C3S300V4F 1I1xxTxxMxx	TPDM30...			
PS90-003-S2/MU90-345	SMH11530108192I65A74		C3S075V4F 1I1xxTxxMxx	①	TPDM0808...		
	SMH11556108192I65A74	C3S150V4F 1I1xxTxxMxx	TPDM15...				

- ① MOK55/... (standard) or MOK54/... (cable chain compatible)
 ② MOK56/... (standard) or MOK57/... (cable chain compatible)
 ③ MOK59/... (standard) or MOK64/... (cable chain compatible)

Order codes:

bold: mandatory so that the package is combinable

italics: recommended/standard

blue: must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

Predefined Motion Packages ETH100, ETH125 ¹⁾


with Compax3, TPD-M

In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

¹⁾ does not apply for ATEX Cylinder
Contact customer service team for bore size 100mm and 125mm

Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

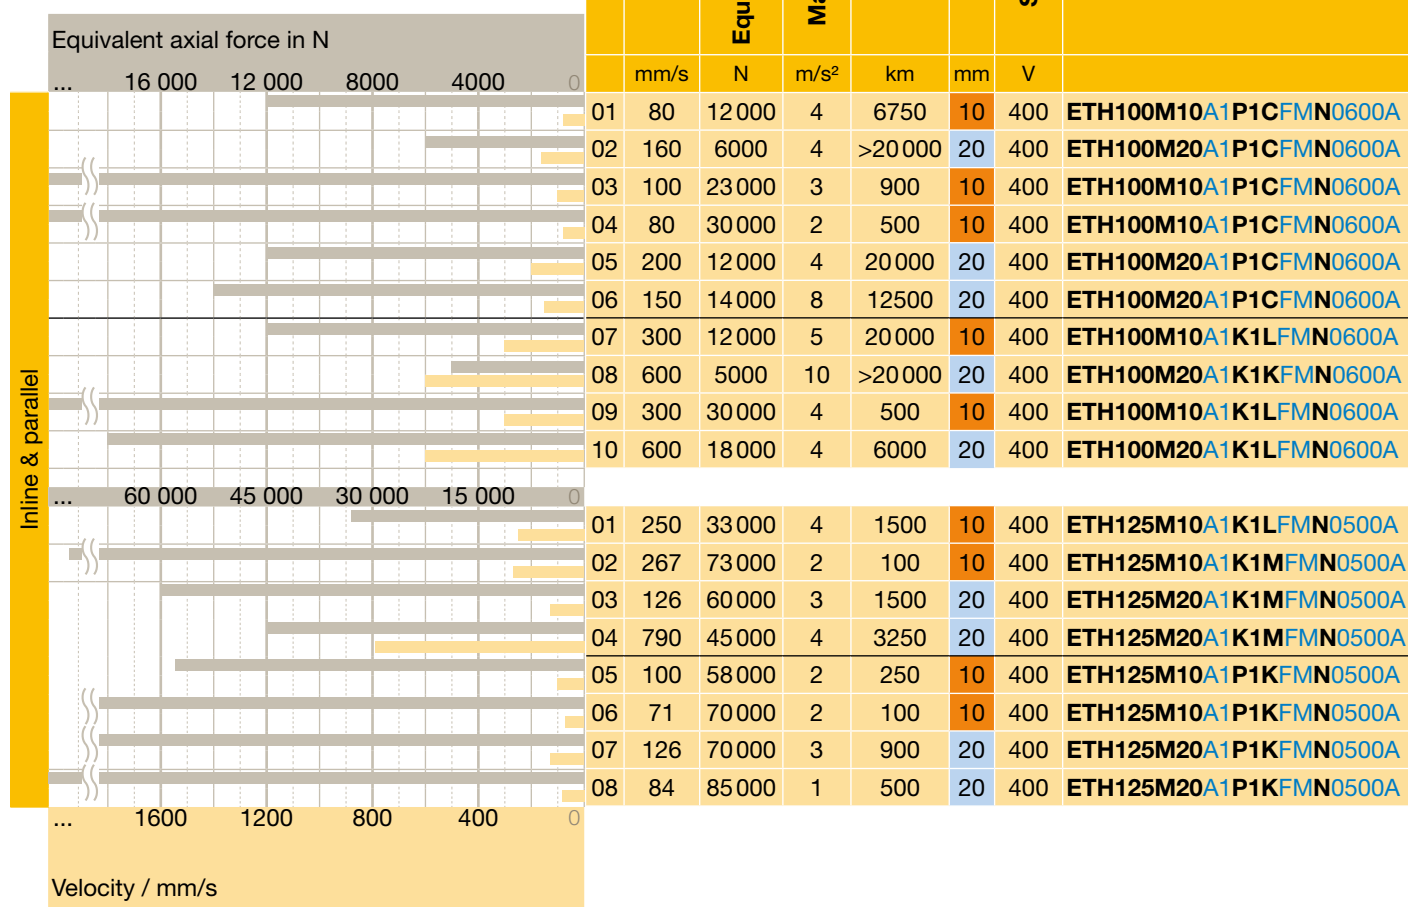

Basic Application Assumptions:

- Stroke from 100 to 600 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
 - with parallel motor: respect transmissible torque depending on the motor speed n
 - permissible axial thrust forces must be respected
- Ambient conditions
- ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox
- 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes								
	Gearbox	Motor	Drive Compax3	Motor Cable	Feedback cable	Drive TPD-M	Motor cable	Feedback cable
	PS115-005-S2/MU115-005	SMH10056065242I65A74	C3S075V4F11IxxTxxMxx	❶	❹	TPDM0808...	CAVOMOT...	CAVORES...
	PS115-005-S2/MU115-005	SMH10030065242I65A74	C3S038V4F11IxxTxxMxx	❶		TPDM05...		
	PS115-004-S2/MU115-026	SMH14230155242I65A74	C3S150V4F11IxxTxxMxx	❷		TPDM15...		
	PS115-005-S2/MU115-026	SMH14230155242I65A74	C3S150V4F11IxxTxxMxx	❷		TPDM15...		
	PS115-004-S2/MU115-026	SMH14230155242I65A74	C3S150V4F11IxxTxxMxx	❷		TPDM15...		
	PS115-005-S2/MU115-026	SMH14230155242I65A74	C3S150V4F11IxxTxxMxx	❷		TPDM15...		
	without gearbox	SMH17030355382I65A74	C3S150V4F11IxxTxxMxx	❷		TPDM15...		
		MH14545285242I65A74	C3S300V4F11IxxTxxMxx	❸		TPDM30...		
		MH20530905382I65A74	C3H050V4F11IxxTxxMxx	❹		--		
		MH20530905382I65A74	C3H050V4F11IxxTxxMxx	❹		--		
	without gearbox	MH20530705383I65A74	C3H090V4F11IxxTxxMxx	❺	❺	--		
		MH265301505483M654	C3H090V4F10IxxTxxMxx	❺	❷	--		
		MH265302205483M654	C3H125V4F10IxxTxxMxx	❺	❷	--		
		MH265302205483M654	C3H125V4F10IxxTxxMxx	❺	❷	--		
	PE700410M1802153880	MH20530285383I65A74	C3S300V4F11IxxTxxMxx	❹	❺	--		
	PE700510M1802153880	MH20530285383I65A74	C3S300V4F11IxxTxxMxx	❹	❺	--		
	PE700410M1802153880	MH20530705383I65A74	C3H050V4F11IxxTxxMxx	❺	❺	--		
	PE700510M1802153880	MH20530705383I65A74	C3H050V4F11IxxTxxMxx	❺	❺	--		

- ❶ MOK55/... (standard) or MOK54/... (cable chain compatible)
- ❷ MOK56/... (standard) or MOK57/... (cable chain compatible)
- ❸ MOK59/... (standard) or MOK64/... (cable chain compatible)
- ❹ MOK61/...,
- ❺ MOK62/...
- ❻ GBK24/... (cable chain compatible)
- ❼ REK42/... (standard) or REK41/... (cable chain compatible)

Order codes:

bold: mandatory so that the package is combinable

italics: recommended/standard

blue: must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

Predefined Motion Packages ETH032, ETH050, ETH080 (P-Series) ¹⁾

with Compax3, SLVD-N, TPD-M, P-Series


In order to simplify the representation, we assumed boundary conditions which must be adhered to without exception in your application, otherwise the product combinations suggested here might not work. In this case, the application must be dimensioned conventionally.

¹⁾ does not apply for ATEX Cylinder

Contact customer service team for bore size 100mm and 125mm

Predefined Motion Packages

Cylinder / gearbox / motor / drive controller / cable

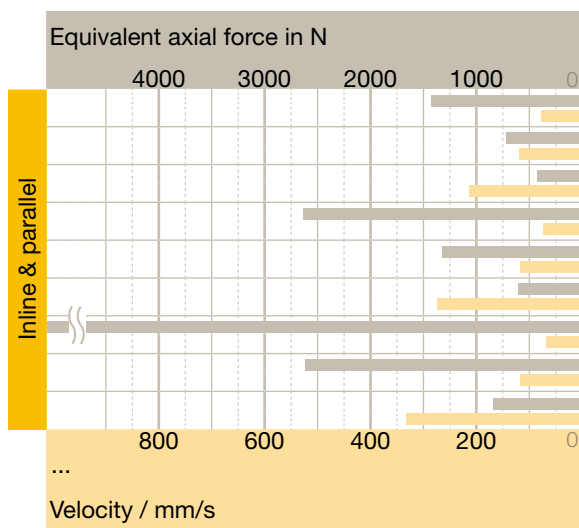

	Max. Speed	Equivalent axial force	Max. Acceleration	Lifetime	Screw lead	Supply voltage	Cylinder
	mm/s	N	m/s ²	km	mm	V	
01	333	1440	4	265	5	230	ETH032M05A1AAMFMN0200A
02	667	720	8	9300	10	230	ETH032M10A1AAMFMN0200A
03	1067	420	12	>20000	16	230	ETH032M16A1AAMFMN0200A
04	333	2710	4	4820	5	230	ETH050M05A1AANFMN0300A
05	667	1360	8	>20000	10	230	ETH050M10A1AANFMN0300A
06	1333	680	15	>20000	20	230	ETH050M20A1AANFMN0300A
07	333	5400	4	530	5	230	ETH080M05A1AAXFMN0400A
08	667	2700	8	4820	10	230	ETH080M10A1AAXFMN0400A
09	1706	850	15	>20000	32	230	ETH080M32A1AAXFMN0300A

Motor

P M-F	BL	04	A	M	K	2
Flange size	Shaft Power	Rate Speed (RPM)	Shaft Key	Oil seal, Brake		
AL 40mm	R5 50W	A* 3,000rpm	N No key	Omit No oil		
BL 60mm	01 100W	D 2,000rpm	K Shaft key	Seal and Brake		
CL 80mm	02 200W	G 1,500rpm	Encoder	1 Oil seal		
E 130mm	--- ---	M 1,000rpm	M BiSS-C Multi Turn	2 Brake		
F 180mm	35 3,500W			3 Both		

*Standard

Drive

P D	04	P
Power	Control Interface	
04 400W	P Pulse type	
10 1,000W	C EtherCAT Type	
35 3,500W		

Basic Application Assumptions:

- Stroke from 50 to 400 mm
- Horizontal movement
- The characteristics of the individual components are not to be exceeded
 - with parallel motor: respect transmissible torque depending on the motor speed n
 - permissible axial thrust forces must be respected
 - Ambient conditions
 - ...
- Linear acceleration
- Maximum acceleration given = deceleration times
- Application factor = 1.0
- The calculation is based on the assumption: without standstill time (i.e. if there are standstill times in the application, only the power reserve is increased)
- 40 °C ambient temperature, with gearbox 20 °C ambient temperature
- up to 1000 m above sea level

Order Codes				
	Gearbox	Motor	Drive Compax3	Motor Cable Feedback cable
	without gear box	PM-FB04AMxx	PD-04x-xxx	APCS - P APCS - E
	without gear box	PM-FC08AMxx	PD-10x-xxx	
	without gear box	PM-FE10AMxx	PD-10x-xxx	

Reference only.
For more information, pleased contact Parker.

Cable

APCS		-	P	N	03	LS	
Cable		Cable type		Cable length		Option code	
P	Power Cable	N	Standard (Normal Application)	03	3m	BxxxQS	FxL Series Brake Cable
E	Encoder Cable			05	5m	PxxxLS	FxL Series Power Cable
B	Brake Cable	F	High Flex (Robot Application)	10	10m	PxxxHS	FE Series Power Cable
				20	20m	PxxxNB	FE Series Brake Type Power Cable
						PxxIS	FF Series(up to 3.5kW) Power Cable
						PxxPB	FF Series(up to 3.5kW) Brake Type Power Cable
						PxxxJS	FF Series(up to 5.0kW) Power Cable
						PxxLB	FF Series(up to 5.0kW) Brake Type Power Cable
						ExxES	FxL Series Single-turn Encoder Cable
						ExxES1	FxL Series Multi-turn Encoder Cable
						ExxDS	FE/FF Series Single-turn Encoder Cable
						ExxDS1	FE/FF Series Multi-turn Encoder Cable

Order codes:

bold: mandatory so that the package is combinable

italics: recommended/standard

blue: must be selected depending on the application

Hint: The examples shown here are meant to help with the dimensioning process. As many parameters interact in this kind of drive package, the examples make no claim to be complete.

Order Code

Contact customer service team for bore size 100mm and 125mm

	1	2	3	4	5	6	7	8	9	10	11	12
Example	ETH	050	M05	A	1	AAB	F	M	N	0200	A	Uxx

1 Series	ETH	Electro Cylinder
2 Frame size	032	ISO 32
	050	ISO 50
	080	ISO 80
	100	ISO 100
	125	ISO 125
3 Screw lead Mxx in mm	M05	for ETH032, ETH050, ETH080
	M10	for ETH032, ETH050, ETH080, ETH100, ETH125
	M16	for ETH032
	M20	for ETH050, ETH100, ETH125
	M32	for ETH080
4 Motor mounting position, housing orientation, groove orientation ¹⁾	A	 In-line + groove for initiator 3 & 9 o'clock (standard)
	B	 In-line + groove for initiator 6 & 12 o'clock
	C	 Parallel 12 o'clock / groove for initiator 3 & 9 o'clock
	D	 Parallel 12 o'clock / groove for initiator 6 & 12 o'clock
	E	 Parallel 3 o'clock / groove for initiator 3 & 9 o'clock
	F	 Parallel 3 o'clock / groove for initiator 6 & 12 o'clock
	G	 Parallel 6 o'clock / groove for initiator 3 & 9 o'clock
	H	 Parallel 6 o'clock / groove for initiator 6 & 12 o'clock
	J	 Parallel 9 o'clock / groove for initiator 3 & 9 o'clock
	K	 Parallel 9 o'clock / groove for initiator 6 & 12 o'clock

5 Relubrication option ^{2), 3)}	in combination with motor mounting position, housing orientation, groove orientation		
1	No additional relubrication hole (standard) (not with 3 o'clock motor mounting)		
	ETH032	ETH050	ETH080/ETH100/ETH125
	A, B, C, D, G, H, J, K	A, B, C, D, G, H, J, K	A, C, G, J
2	Relubricating hole centered in the profile 12 o'clock		
	ETH032	ETH050	ETH080/ETH100/ETH125
	A, C, E, G, J	B, D, F, H, K	A, C, E, G, J
3	Relubricating hole centered in the profile 3 o'clock		
	ETH032	ETH050	ETH080/ETH100/ETH125
	B, D, F, H, K	A, C, E, G, J	A, C, E, G, J
4	Relubricating hole centered in the profile 6 o'clock		
	ETH032	ETH050	ETH080/ETH100/ETH125
	A, C, E, G, J	B, D, F, H, K	A, C, E, G, J
5	Relubricating hole centered in the profile 9 o'clock		
	ETH032	ETH050	ETH080/ETH100/ETH125
	B, D, F, H, K	A, C, E, G, J	A, C, E, G, J

6 Motor flange ⁴⁾	Motors always with key groove on the output shaft		
AKD	EME	ETH032 ETH050 ETH080	With motor flange for Parker motor:
AAM	K1M	• • •	PM-FBL 01/02/04
AAV		• • •	PM-FCL 03/04
AAN		• • •	PM-FCL 05/06/07/08/10
AAW		• • •	PM-FE 03M/05G/06D/09A/11D/15A
AAX		• • •	PM-FE 09M/13G/16D/22A
AAA	K1A	• • •	SMH60-B8/9, MH56-B5/9
AAB	K1B	• • •	SMH60-B5/11, MH70-B5/11 or NX3, EX3
AAC	K1C	• • •	SMH82-B8/14
AAD	K1D	• • •	SMH82-B8/19, MH105-B9/19 (old HJ96 Motor) or NX4, EX4
AAE	K1E	• • •	SMH82-B5/19, SMH100-B5/19, MH105-B5/19
AAF	K1F	• • •	SMH-100-B5/14
AAJ	K1J	• • •	SMH115-B7/24, MH105-B6/24 or NX6, EX6
AAK	K1K	• • •	SMH142-B5/24, MH145-B5/24
BAA	P1A	• • •	PS60
BAB	P1B	• • •	PS90
BAJ	P1J	• • •	PV60-TN (PE3)
BAK	P1K	• • •	PV90-FB (PE4)

7	Mounting type
F	Thread on the cylinder body (standard) (ETH100, ETH125 does not have a mounting thread on the underside)
B	Foot mounting ^{6), 7)} (For ETH100, ETH125 only available in protection class option A)
C	Rear Clevis ⁶⁾
D	Centre trunnion mounting (not with motor mounting positions E, F, J, K), for lubricating option "1", the lubrication port is always in 6 o'clock position
E	Rear Eye Mounting ⁶⁾
G	Mounting Flanges ⁷⁾ (only with motor mounting positions A, B, C, D) (For ETH100, ETH125 only available in protection class option A)
H	Rear plate ⁶⁾ (For ETH125 only available in protection class option A)
J	Front plate ⁷⁾ (For ETH125 only available in protection class option A)
N	Rear Plate & Front Plate ^{6), 7)} (For ETH125 only available in protection class option A)
X	customized - please contact us
8	Thrust rod
M	External thread (standard)
F	Internal Thread
K	Internal thread (for the reception of the force sensor with external thread) (only for ETH100, ETH125)
C	Rod clevis ⁸⁾ (stainless steel with protection class "B" and "C"; standard with protection class "A")
S	Spherical Rod Eye (stainless steel with protection class "B" and "C"; standard with protection class "A") (For ETH125 only available in protection class option A)
R	Parallel guiding with ball bushing ⁸⁾ (not with motor mounting positions E, F, J, K) (available only in protection class option A)
T	Parallel guiding with sliding bushing ⁸⁾ (not with motor mounting positions E, F, J, K)
L	Alignment Coupler (available only in protection class option A)
X	customized - please contact us
9	Option
N	Standard
A	Designation for ATEX Cylinder ⁹⁾

10	Stroke in mm	ETH032	ETH050	ETH080	ETH100/ ETH125
0050		•	•		
0100		•	•	•	•
0150		•	•	•	•
0200		•	•	•	•
0300		•	•	•	•
0400				•	•
0600				•	•
1000		•			•
1200			•		
1600				•	•
XXXX		50...1000	50...1200	50...1600	100...2000
customized in steps of 1 mm					

11	Protection class
A	IP54 with galvanized screws
B	IP 54 stainless version with VA screws
C	IP 65 like B + protective lacquer and specially sealed

12	Optional (only customized cylinders)
Uxx	Unique Version
Here, a number for customized cylinders is assigned, please contact us	
with ATEX Cylinders ⁹⁾	
000	Standard ATEX Cylinder
xxx	ATEX release xxx ATEX Applications-Identification No. xxx

- ETH080-ETH125 features 2 grooves each on all 4 sides
(i.e. Code B=A or D=C, F=E, H=G, K=J),
therefore codes A, C, E, G, J are possible for ETH080-ETH125.
- With parallel configuration, the motor may block access to the
sensors and the lubrication port.
- When selecting the relubrication options 2-5, the standard
lubrication port is without function.
- Please check cylinder motor/gearbox combination with the aid of
the table ("Motor Mounting Options" see page <OV>).
Order Code SMH100-B5/14: " SMH100...ET..." (the motor shaft
diameter is replaced by the term "ET") (not in the motors catalog)
only with feedback: Resolver, A7
- Not with motor mounting options A & B.
- Not for thrust rod R, T
- Not for ETH100, ETH125
- Please observe the explanations "ETH - Electro Thrust Cylinder
for ATEX Environment" see page 12

Software & Tools

- Actuator database
 - A special actuator database is available in the Compax3 ServoManager. You can simply enter the ETH type code for automatic controller parameterization.
- CAD-Configurator
 - Configure your electro cylinder CAD data online.
www.parker.com/eme/eth
- Dimensioning tool "EL-Sizing"
 - A dimensioning tool simplifies the dimensioning process.
www.parker.com/eme/eth





Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call +82-31-379-0220



Aerospace

Key Markets

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes



Fluid Control

Key Markets

Agriculture
Air conditioning
Construction Machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves



Electromechanical

Key Markets

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydraulic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions



Filtration

Key Markets

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & dryers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings



Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors



Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors



Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical Instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves



Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General Industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration dampening

Parker Asia Pacific

China

Sales Office

Shanghai office, 86-21-28995000
Parker Hannifin Motion&Control Co. Ltd.
280 Yunqiao Road, Jin Qiao Export Processing Zone,
Shanghai 201206, China

Sales Office

Guangzhou Office, 86-20 32121688
Parker Hannifin Motion&Control Co.Ltd.
Room 202, Building F, Guangdong Soft Science Park,
No 11, Caipin Road, Guangzhou Science City, Luo
Gang District, Guangzhou 510663, China

Sales Office

Beijing office, 86-10-6561-0520
Parker Hannifin Motion&Control Co.Ltd.
Suite 8B01, 8th Floor, Hanwei Plaza,7 Guanghua
Road, Chaoyang District, Beijing 100004, P.R.China

Automation Division

WUXI plant, 86-510-8116-7000
Parker Hannifin Motion and Control (Wuxi) Company Ltd.
No.200, Furong Zhong Si Lu, Xishan Economic
Development Zone, Wuxi 214101, Jiangsu, China

Japan

Sales Office

Asahi Plant, 81-479-64-2282
kpl_sales@parker.com
Kuroda Pneumatics LTD
10243 Kamakazu, Asahi-shi, Chiba 289-2505 Japan

Automation Division

Asahi Plant, 81-479-64-2282
Kuroda Pneumatics LTD
10243 Kamakazu, Asahi-shi, Chiba 289-2505 Japan

Korea

Sales Office

Pangyo Office, 822-6344-0100
11F, U-Space 1B Daewangpangyo-ro 660,
Bundang-gu, Seongnam, Gyeonggi-do, 13494, Korea

Automation Division

Jang An Plant, 82 31-359-0700
Parker Korea Ltd.
23, Jangangongdan 1-gil, Jangang-myeon,
Hwaseong-si, Gyeonggi-do, 18579, Korea

India

Sales Office

PHI Chennai Sales office, 91-44-43910799
Parker Hannifin India Private. Limited,
Plot no. P41/2, Eight Avenue, Domestic Tariff Area,
Mahindra world city, Chengalpattu, Kanchipuram
District, Pin : 603002, Tamil Nadu, India

Automation Division

PHI Chennai MWC Plant, 91-44-43910703
Parker Hannifin India Private. Limited,
Plot no. P41/2, Eight Avenue, Domestic Tariff Area,
Mahindra world city, Chengalpattu, Kanchipuram
District, Pin : 603002, Tamil Nadu, India

Taiwan

Sales Office

Taipei Office, 886-2-22988987
Parker Hannifin Taiwan Co., Ltd.
8F., No.22 Wuquan 7th Road., Wugu Dist., New Taipei City, 248,
Taiwan (R.O.C)

Thailand

Sales Office

Bangkok Office, (66) 2 186 7000
Parker Hannifin (Thailand) Co., Ltd.
1265 Rama 9 Road, Suanluang Bangkok 10250 Thailand

Singapore

Sales Office

Office: +65 6887 6300
Parker Hannifin Singapore Pte Ltd.
11th Fourth Chin Bee Road Singapore 619702

Malaysia

Sales Office

Selangor Office, +603 7849 0800
Parker Hannifin Industrial (M) Sdn Bhd
No.11 Persiaran Pasak Bumi
Seksyen U8, Bukit Jelutong Industrial Park
40150 Shah Alam, Selangor, Malaysia

Indonesia

Sales Office

Office: +62-21-2977-7900
PT. Parker Hannifin Indonesia
Techno Park Block G3/15-16
BSD (Bumi Serpong Damai) Tangerang 15314 Banten- Indonesia

Vietnam

Sales Office

Office: (84) 8 3999 1600
Parker Hannifin Vietnam Co., Ltd.
No. 43R/10 Ho Van Hue Street,
Phu Nhuan District, Ho Chi Minh City, Vietnam

Australia

Sales Office

Office: +61-2-9634-7777
Parker Hannifin (Australia) Automation Department
9 Carrington Rd Castle Hill, NSW, 2154 Australia

New Zealand

Sales Office

Office: +64 9 574 1744
Parker Hannifin (NZ) Ltd.
5 Bowden Road, Mt Wellington 1060, Auckland, New Zealand

This catalogue is offered to you by;



Parker Hannifin Corporation

Automation Korea Division
23, Jangangongdan 1-gil Jangang-myeon,
Hwaseong-si, Gyeonggi-do, 445-941, Korea
Tel: 82-31-379-0220 Fax: 82-31-379-2349
www.parker.com
http://solutions.parker.com/AUG_EM