

UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NEW BRUNSWICK
NUNAVUT


NOVA SCOTIA
YUKON

PRINCE EDWARD ISLAND
NORTHWEST TERRITORIES

NEWFOUNDLAND AND LABRADOR

MANUFACTURERS NAME: Parker Hannifin Corporation, Pneumatic Division North America
 MANUFACTURERS ADDRESS: 8676 East M-89, Richland Michigan 49083
 PLANT LOCATIONS: Richland, Michigan

CATEGORY OF FITTINGS TO BE REGISTERED. CIRCLE ONE CATEGORY ONLY	TITLE OF THE STANDARD OF CONSTRUCTION
A Pipe fittings, including couplings, tees, elbows, Ys, plugs, unions, pipe caps, or reducers B Flanges: all flanges C Valves: <u>all line valves</u> D Expansion joints, flexible connections, and hose assemblies: all types E Strainers, filters, separators, and steam traps F Measuring devices, including pressure gauges, level gauges, sight glasses, levels, or pressure transmitters G Certified capacity-rated pressure relief devices acceptable as primary over pressure protection on boilers, pressure vessels, piping and fusible plugs H Pressure retaining components that do not fall into one of the above categories N Nuclear components: Class 1 <input type="checkbox"/> Class 2 <input type="checkbox"/> Class 3 <input type="checkbox"/> , (Meeting AECB or ASME requirements)	ASME B31.3 ISO pneumatic standards ISO 6953-1 and -2 Regulators


SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR ON THE PRODUCT	TYPE OF CONSTRUCTION
 WILKERSON'	FORGED <input type="checkbox"/> WELDED <input type="checkbox"/> WROUGHT <input type="checkbox"/> CAST <input type="checkbox"/> OTHER <input checked="" type="checkbox"/> DESCRIBE OTHER: Machined from Zinc die castings.

LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUAL ITEMS TO BE REGISTERED:

Testing reports 17623 and 17677 from Parker lab witnessed by Steve Ayotte ARISE Boiler Inspection and Insurance Company dated April 8, 2016 and May 16, 2016 respectively.
 Parker catalog pages covering R21, R30, and R31 series Dial Air pressure regulators.
 Assembly drawings for R21, R30, and R31 series Dial Air pressure regulators.
 ISO 9001-2008 for Parker Pneumatic Division plant in Richland, Michigan (Engineering and Design location).
 This pressure regulator is also sold under the Parker label 52R and 53R series (this literature also included in package).

DECLARATION:
 I Nicholas Larsen (see note 3) employed by Parker Hannifin Corporation and being the person having full authority and responsibility for the quality of the end product do solemnly declare that the information contained in this form is true and to the best of my knowledge represents the product for which registration is sought. The dimensions, materials of construction, pressure temperature ratings, and identification markings are in accordance with the herein named standards. I further declare that the manufacture of these fittings is regulated by a Quality Control Program which extends to each plant where fabrication occurs in whole or in part and has been verified by ISO 9001-2008 Certification as being suitable for that purpose and I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

Signature of Declarer: Nicholas Larsen
 Declared before me at Advia Credit Union DAVID RUSSELL, Notary Public
 This 12 day of July AD 2016 State of Michigan, County of Kalamazoo
 My Commission Expires 03/18/2020
 Commissioner of Oaths or Notary Public: (sign) [Signature] Acting in the County of Kalamazoo

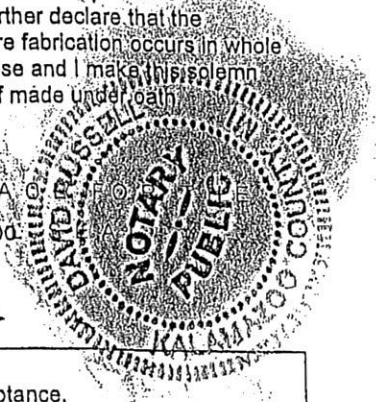

This space for Regulatory Authority use
 This registration must be revalidated after ten (10) years from the date of acceptance.

CRN: 0C19078.5
 FID#: 2994

- Notes:
1. All fittings shall be registered in the name of the Manufacturer.
 2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation.
 3. The declaration shall be made by the person having full authority and responsibility for the quality of the end product.
 4. Quality control programs shall be resubmitted for validation at a maximum interval of five (5) years.

