

UNIFORM STATUTORY DECLARATION FORM FOR THE REGISTRATION OF FITTING DESIGNS

NEW BRUNSWICK
NUNAVUT

NOVA SCOTIA
YUKON

PRINCE EDWARD ISLAND
NORTHWEST TERRITORIES


NEWFOUNDLAND AND LABRADOR

MANUFACTURERS NAME: Parker Hannifin Instrumentation Products Division	
MANUFACTURERS ADDRESS: 1005 A Cleaner Way, Huntsville, Alabama	
PLANT LOCATIONS: 2851 Highway 20 North, Jacksonville, Alabama	
CATEGORY OF FITTINGS TO BE REGISTERED. CIRCLE ONE CATEGORY ONLY A Pipe fittings, including couplings, tees, elbows, Ys, plugs, unions, pipe caps, or reducers B Flanges: all flanges <input checked="" type="radio"/> C Valves: all line valves D Expansion joints, flexible connections, and hose assemblies: all types E Strainers, filters, separators, and steam traps F Measuring devices, including pressure gauges, level gauges, sight glasses, levels, or pressure transmitters G Certified capacity-rated pressure relief devices acceptable as primary over pressure protection on boilers, pressure vessels, piping and fusible plugs H Pressure retaining components that do not fall into one of the above categories N Nuclear components: Class 1 <input type="checkbox"/> Class 2 <input type="checkbox"/> Class 3 <input type="checkbox"/> (Meeting CNSC or ASME requirements)	TITLE OF THE STANDARD OF CONSTRUCTION ASME B31.3
SHOW MANUFACTURERS NAME, TRADEMARK, OR LOGO AS IT WILL APPEAR ON THE PRODUCT SEE ATTACHED	TYPE OF CONSTRUCTION FORGED <input checked="" type="checkbox"/> WELDED <input type="checkbox"/> WROUGHT <input type="checkbox"/> CAST <input type="checkbox"/> OTHER <input type="checkbox"/> DESCRIBE OTHER:
LIST OF SUPPORTING DOCUMENTATION AND IDENTIFICATION OF THE ACTUAL ITEMS TO BE REGISTERED: SCOPE OF REGISTRATION RENEWAL OC2206.2 CATALOG 4135-CV, "CHECK VALVES, FILTERS and Relief VALVES" dated DECEMBER 2010	

DECLARATION:

I Tony Wyszowski (see note 3) employed by Parker Hannifin and being the person having full authority and responsibility for the quality of the end product do solemnly declare that the information contained in this form is true and to the best of my knowledge represents the product for which registration is sought. The dimensions, materials of construction, pressure temperature ratings, and identification markings are in accordance with the herein named standards. I further declare that the manufacture of these fittings is regulated by a Quality Control Program which extends to each plant where fabrication occurs in whole or in part and has been verified by Det Norske Veritas as being suitable for that purpose and I make this solemn declaration conscientiously believing it to be true, and knowing that it is of the same force and effect as if made under oath.

Signature of Declarer: [Signature]
 Declared before me at Huntsville in the state of Alabama
 This 20th day of NOVEMBER AD 2014
 Commissioner of Oaths or Notary Public: (sign) [Signature]

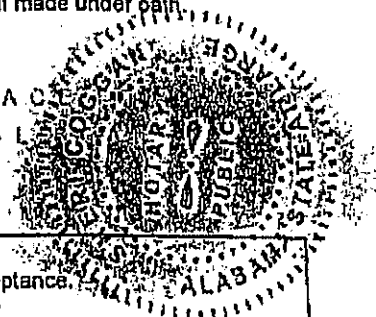

This space for Regulatory Authority use This registration must be revalidated after ten (10) years from the date of acceptance.	
CRN: <u>OC02206.2 ADD2</u> FID#: <u>1937</u>	Newfoundland Labrador Service NL Registered <u>01.02206.20 ADD.2</u> Date <u>15/10/15</u> Engineering and Inspection Services Registered by <u>[Signature]</u> UNDER THE AUTHORITY OF THE PUBLIC SAFETY ACT AND THE BOILER, PRESSURE VESSELS AND COMPRESSED GAS REGULATIONS Rev. 1 05/2003
Notes: 1. All fittings shall be registered in the name of the Manufacturer. 2. Each category shall be supported with two Statutory Declaration forms and one copy of supporting documentation. 3. The declaration shall be made by the person having full authority and responsibility for the quality of the end product. 4. Quality control programs shall be resubmitted for validation at a maximum interval of five (5) years.	



Parker Engineering Manual
Parker Hannifin Corporation
Instrumentation Connectors Division

Issued 6-25-79	Section IDENTIFICATION
Revised 1-15-98	Standard No. ES-703
Ecn No. ICD97055	Page 1 OF 6

Subject:
PRODUCT LOGO MARKING REQUIREMENTS

Parker Symbol
ID-3

GENERAL:

The following information is adapted from Parker's Corporation Communications and Identification Manual.

PRODUCT IDENTIFICATION:

It is important that Parker identification appear on the millions of components sold into the market place each year. For this reason, special versions of the Corporate Signature have been designed to accommodate difficult product marking situations. The three key variables which will govern the selection of proper identification techniques are the material on which the marking is to be applied, the surface contour, and identification area size. The order of preference for product marking usage is shown. When possible, the solid Signature should be used down to a minimum of 5/8 inch. For smaller applications, the solid Open Signature, with slightly more open space within the letterforms, should be used. The Linear Signature and the Helvetica Light Parker are approved only for especially difficult marking conditions and hard material surfaces. When the marking surface, contour or area size makes it impractical to use the complete Parker identification, a "P" may be used in order of preference shown. Critical dimensions for product identification only are provided in this section.

0 C 0 2 2 0 6 . 2



Issued 6-25-79	Section IDENTIFICATION
Revised 1-15-98	Standard No. ES-703
Ecn No. ICD97055	Page 2 OF 6

Subject:
PRODUCT LOGO MARKING REQUIREMENTS

Parker Symbol
ID-3

- 1 Primary
Corporate Signature
Minimum Size 5/8"



- 2 Small Size
Corporate Signature
Maximum Size 5/8"



- 3 Linear
Corporate Signature



- 4 Straight Type
Identification—
Helvetica Light

Parker

- 5 Small Size "P"
Maximum Size 3/16"



- 6 Linear "P"



- 7 Straight Type "P"
Identification—
Helvetica Light

P

0 C 0 2 2 0 6 . 2



the pressure equipment safety authority

Celebrating 20 years
1995 – 2015

9410 - 20 Ave N.W.
Edmonton, Alberta, Canada T6N 0A4
Tel: (780) 437-9100 / Fax: (780) 437-7787

April 07, 2015

Attention: Susan Turner
PARKER HANNIFIN INSTRUMENTATION CANADA
4635 DURHAM ROAD S
GRIMSBY, ON

The design submission, tracking number 2014-10252, originally received on December 09, 2014 was surveyed and accepted for registration as follows:

CRN : 0C02206.2 **Accepted on:** April 07, 2015
Reg Type: Addition to Acc. Fitting **Expiry Date:** April 07, 2025
Drawing No. : C SERIES, CATALOG 4135-CV, DECEMBER 2010
Fitting type: CHECK VALVES

Design registered in the name of : PARKER HANNIFIN

The registration is conditional on your compliance with the following notes:

This registration is valid only for fittings fabricated at the location(s) covered by the QC certificate attached to the accepted AB-41 Statutory Declaration form. This registration is valid only until the indicated expiry date only if the Manufacturer maintains a valid quality management system approved by an acceptable third-party agency until that date. Should the approval of the quality management system lapse before the expiry date indicated above, this registration shall become void.

*There are no changes to design per client letter.
Valves with material specification B283 C37700 shall not be used over 200 degree F for ASME B31.1 application. Valves with material specification B16 C36000 shall not be used over 100 degree F. Onus is on you to ensure the end users are aware of these limitations.*

An invoice covering survey and registration fees will be forwarded from our Revenue Accounts.

Enclosed are stamped prints for your reference.

Sincerely,

GRYNCHUK, MILLA